


# Four Post Lift



Model : **ME - FPL FS40R** 4.0 Ton

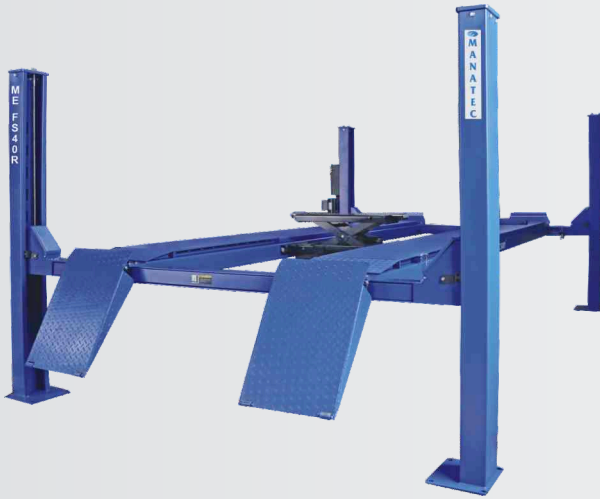

>> **Electro Hydraulic** <<

## Salient Features

- Driven by hydraulic cylinder in stable lifting & lowering
- Device performs stable and reliable work with anti-breaking rope safety insurance
- Connected by using steel cables, forced synchronized movement of the lift in order to effectively prevent the sloping of the vehicle
- Level can be well adjusted to meet the need for wheel alignment
- Wheel free jack 2 Ton capacity

## Technical Specification

Lifting capacity	<b>4.0 Ton</b>
Max lifting height	<b>1962 mm</b>
Min lifting height	<b>127 mm</b>
Platform Length	<b>4500 mm</b>
Platform width	<b>508 mm</b>
Overall width (with motor)	<b>3276mm</b>
Lifting speed	<b>&lt;55 seconds</b>
Ramp (2 Nos.)	<b>Included</b>
Central Jack	<b>2 Ton</b>
Power supply	<b>380V AC, 3 Phase, 50Hz</b>
Power	<b>2.2 KW</b>

# Hydraulic Washing Lift


Model : **ME - WL 4T / 8T**



Model : **ME - WL 4T SA**



**Spider Arm**

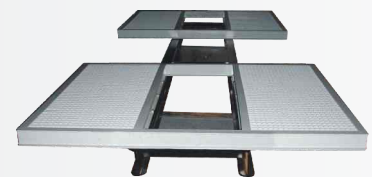

**Tyre Rest Platform (Optional)**

## Salient Features

- Hydro pneumatic
- Standard model at 4 ton capacity
- Separate model with Spider Arm design for 4 ton capacity
- Plunger finish - Hard chrome plated to 20 microns
- Heavy duty rigid ramps accommodate a wide range of vehicles of varying size and type

## Technical Specification

Specification	ME - WL 4T	ME - WL 4T SA	ME - WL 8T
Capacity	<b>4 Ton</b>	<b>4 Ton</b>	<b>8 Ton</b>
No. of posts	<b>1 No.</b>	<b>1 No.</b>	<b>1 Nos.</b>
Plunger diameter	<b>270 mm</b>	<b>270 mm</b>	<b>320 mm</b>
Operating pressure	<b>9 to 12 Kg/cm<sup>2</sup></b>	<b>9 to 12 Kg/cm<sup>2</sup></b>	<b>12 Kg/cm<sup>2</sup></b>
Lifting height	<b>1500 mm</b>	<b>1500 mm</b>	<b>1500 mm</b>
Ramp length	<b>4500 mm</b>	—	<b>5500 mm</b>
Spider arm	—	<b>Inclusive</b>	—
Tyre rest platform	<b>Optional</b>	—	<b>Optional</b>
Oil fill capacity	<b>150 ltrs.</b>	<b>150 ltrs.</b>	<b>175 ltrs.</b>