CAR SYSTEM®



# EXPERIENCE. INNOVATION. QUALITY.

PRODUCT CATALOGUE **2025**

a trademark of VOSSCHEMIE

# EXPERIENCE.
# INNOVATION.
# QUALITY.

THE COMBINATION OF **EXPERIENCE**, **INNOVATION** AND **QUALITY** DEFINES EXCELLENCE IN THE AUTOMOTIVE REPAIR SECTOR.

WHAT DOES THAT MEAN FOR YOU?
OPTIMISE YOUR WORK PROCESS AND MAXIMISE YOUR EFFICIENCY WITH PRODUCTS THAT ARE AS EASY TO USE AS THEY ARE EFFECTIVE.

SAVE TIME AND EFFORT IN EVERY STEP. SAY GOODBYE TO BAD RESULTS AND LOOK FORWARD TO FLAWLESS SURFACES, THAT EMPHASISE YOUR SKILLS AND PROFESSIONALISM.

DON'T SETTLE FOR LESS. TAKE YOUR SKILLS TO THE NEXT LEVEL WITH CARSYSTEM AND FEEL THE DIFFERENCE THAT EXPERIENCE, INNOVATION AND QUALITY MAKE.



# CONTENT


008 **ABRASIVES**
ABRASIVES | ACCESSORIES

054 **PUTTIES**

084 **MASKING**

096 **PAINTING**

130 **FINISH**

150 **BONDING & SEALING**

170 **CLEANING**

182 **PERSONAL SAFETY**

196 **PAINTING SUPPLIES**

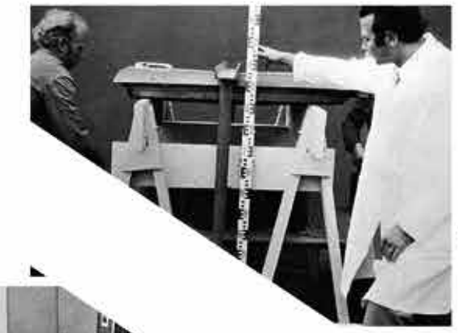







# CARSYSTEM®

## EXPERIENCE. INNOVATION. QUALITY.

With the experience of almost 70 years of company history the **CARSYSTEM** brand is celebrating its 30th birthday. With the registration number 2084438, the brand **CARSYSTEM- VOSSCHEMIE** was registered on 27/08/1994 and entered in the register of the German Patent and Trademark Office on 9th November 1994.




















1994 2024

Anniversary

**CARSYSTEM** is more than a brand. A journey hugely enhanced by our close associations and lasting positive encounters. Our thanks go to you, our customers, partners & family members, who - whether short or long - have accompanied us on this journey and continue to place their trust in us day by day. Thank you for the trust, the support , the shared exchange and achievements.

ABRASIVES FOR THE
PROFESSIONAL USER
IN THE BODYSHOP



# ABRASIVES

## CATEGORY

Discover our complete range of high-quality paper-, foil- and net sanding products for wet and dry applications. Our mini sanding discs are perfect for removing dust inclusions or small imperfections in the top coat. The **CARSYSTEM** abrasives are available in different sizes and grits, so you can find the right sanding disc for any surface in our range. Do you prefer wet sanding? Then we recommend our SW20 sanding water, which extends the lifetime and keeps the sandingpaper moisturized. For hand and machine sanding, the Carsystem range includes suitable hand sanding blocks, orbital sanders and random orbital sanders from Rupes.

# SANDING DISC F.23 CERAMIC

NEW

## Film abrasive – 150 mm – 25 holes

The new ceramic sanding disc F.23 C from Carsystem sharpens itself during sanding and is durable regardless of the sanding pressure. A stearate coating ensures that dust formation is reduced and that there is less clogging of the abrasive during sanding. The sanding disc can be used for all sanding steps in the painting process and is therefore the all-rounder for painting needs!




SCAN ME

### DESCRIPTION

- High performance ceramic disc
- Carsystem 25-hole pattern and oval center hole
- Mineral grain mixture with ceramic content
- Strong, non-tearable foil carrier

### AREA OF APPLICATION

- Suitable for all sanding jobs from coarse to fine sanding

### BENEFITS

- Extremely fast removal thanks to ceramic abrasive grain
- The ceramic sanding grain gives the disc a long life and high durability
- The stearate coating prevents the disc from clogging
- Foil carrier ensures a homogeneous sanding result

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.218 | P 80 | 50 | 1000 |
| 159.219 | P 120 | 50 | 1000 |
| 159.220 | P 180 | 50 | 1000 |
| 159.221 | P 240 | 50 | 1000 |
| 159.222 | P 320 | 50 | 1000 |
| 159.223 | P 400 | 50 | 1000 |
| 159.224 | P 500 | 50 | 1000 |
| 159.225 | P 600 | 50 | 1000 |
| 159.226 | P 800 | 50 | 1000 |

For industrial and professional use only.



# SANDING DISC F.19

## Film abrasive – 150 mm – 25 holes

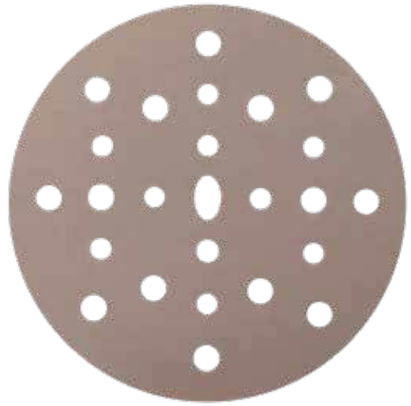

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.046 | P 80 | 50 | 1000 |
| 156.048 | P 120 | 50 | 1000 |
| 156.049 | P 150 | 50 | 1000 |
| 156.050 | P 180 | 50 | 1000 |
| 156.051 | P 220 | 50 | 1000 |
| 156.052 | P 240 | 50 | 1000 |
| 156.054 | P 320 | 50 | 1000 |
| 156.055 | P 360 | 50 | 1000 |
| 156.056 | P 400 | 50 | 1000 |
| 156.057 | P 500 | 50 | 1000 |
| 156.058 | P 600 | 50 | 1000 |
| 156.059 | P 800 | 50 | 1000 |

### DESCRIPTION

- High performance film-based sanding disc
- Carsystem hole pattern 25 holes and oval center hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Suitable for corse to fine sanding

### BENEFITS

- Extremely high and long lasting cutting power
- Universal high performance sanding disc

# SANDING DISC F.19 SOFT

## Film abrasive – 152 mm – Multi hole

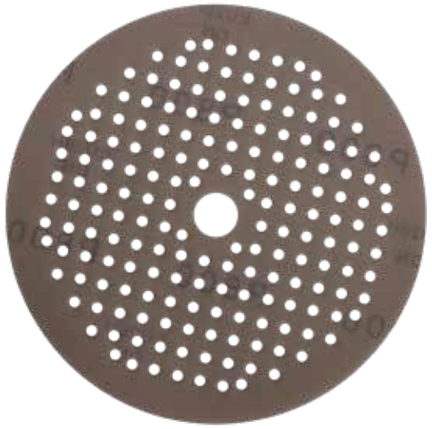

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.933 | P 320 | 30 | 600 |
| 156.934 | P 400 | 30 | 600 |
| 156.935 | P 500 | 30 | 600 |
| 156.936 | P 600 | 30 | 600 |
| 156.937 | P 800 | 30 | 600 |

### DESCRIPTION

- High performance film-based sanding disc with foam back
- Multi hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Filler finish
- Blending
- Matting of surfaces

### BENEFITS

- Surface structure is sanded evenly
- Extremely high and long lasting cutting power
- Comfortable sanding due to the foam back

For industrial and professional use only.

## SANDING DISC F.19 FINISH

Film abrasive – 152 mm – 15 holes



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.899 | P 1000 | 50 | 1000 |
| 156.900 | P 1200 | 50 | 1000 |
| 156.901 | P 1500 | 50 | 1000 |
| 156.902 | P 2000 | 50 | 1000 |

### DESCRIPTION

- High performance film-based sanding disc
- Special coating
- Carsystem hole pattern 15 holes and oval center hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Blending
- Matting of surfaces
- Finish (Removing of imperfections)

### BENEFITS

- Extremely fast removing of surface structure and imperfections
- Special coating provides an extra fine and even sanding pattern
- Perfect levelling of the transition zone between new and old paint layers
- Reduces the reworking time in the finishing process

## SANDING DISC F.19

Film abrasive – 77 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.647 | P 80 | 50 | 1000 |
| 156.648 | P 120 | 50 | 1000 |
| 156.649 | P 150 | 50 | 1000 |
| 156.650 | P 180 | 50 | 1000 |
| 156.651 | P 220 | 50 | 1000 |
| 156.652 | P 240 | 50 | 1000 |
| 156.653 | P 320 | 50 | 1000 |
| 156.654 | P 400 | 50 | 1000 |
| 156.655 | P 500 | 50 | 1000 |
| 156.903 | P 800 | 50 | 1000 |

### DESCRIPTION

- High performance film-based sanding disc
- Aluminium oxide grain

### AREA OF APPLICATION

- Suitable for corse to fine sanding

### BENEFITS

- Extremely high and long lasting cutting power
- Universal high performance sanding disc



## SANDING DISC F.19 FINISH

Film abrasive – 77 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.904 | P 1500 | 50 | 1000 |
| 156.905 | P 2000 | 50 | 1000 |

### DESCRIPTION

- High performance film-based sanding disc
- Special coating
- Aluminium oxide grain

### AREA OF APPLICATION

- Blending
- Matting of surfaces
- Finish (Removing of imperfections)

### BENEFITS

- Extremely fast removing of surface structure and imperfections
- Special coating provides an extra fine and even sanding pattern
- Perfect levelling of the transition zone between new and old paint layers
- Reduces the reworking time in the finishing process

## SANDING DISC P.19

Paper abrasive – 150 mm – 25 holes

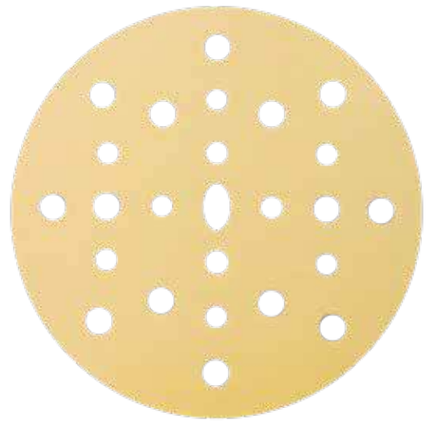

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.357 | P 40 | 50 | 500 |
| 156.358 | P 60 | 50 | 500 |
| 156.359 | P 80 | 50 | 500 |
| 156.361 | P 120 | 50 | 500 |
| 156.362 | P 150 | 50 | 500 |
| 156.363 | P 180 | 50 | 500 |
| 156.364 | P 220 | 50 | 500 |
| 156.365 | P 240 | 50 | 500 |
| 156.367 | P 320 | 50 | 500 |
| 156.368 | P 360 | 50 | 500 |
| 156.369 | P 400 | 50 | 500 |
| 156.370 | P 500 | 50 | 500 |
| 156.371 | P 600 | 50 | 500 |

### DESCRIPTION

- Universal paper-sanding disc
- Carsystem hole pattern 25 holes and oval center hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Suitable for corse to fine sanding

### BENEFITS

- High cutting power
- High efficiency

## ProFlex JUPITER

Film abrasive – 152 mm – 15 holes

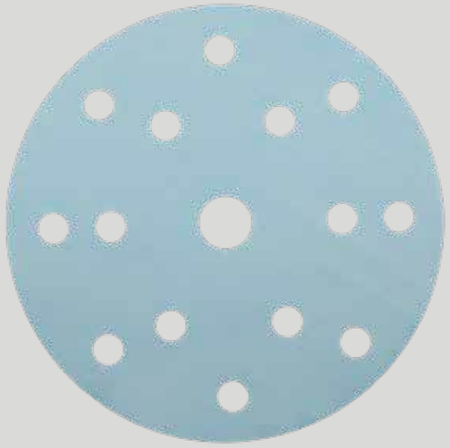

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.449 | P 600 | 50 | 1000 |
| 154.450 | P 800 | 50 | 1000 |
| 154.451 | P 1000 | 50 | 1000 |
| 154.452 | P 1200 | 50 | 1000 |
| 154.453 | P 1500 | 50 | 1000 |
| 153.469 | P 2000 | 50 | 1000 |
| 153.470 | P 2500 | 50 | 1000 |
| 153.471 | P 3000 | 50 | 1000 |
| 156.939 | P 4000 | 50 | 1000 |

### DESCRIPTION

- Ultraflexible soft film disc
- 15 holes
- Aluminium oxide grain

### AREA OF APPLICATION

- Dry sanding
- Filler finish
- Blending
- Matting of surfaces
- Finish

### BENEFITS

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
- Extremely fine sanding pattern
- Reduces the polishing time

### APPLICATION ADVICE

We recommend the use of the ProFlex Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

## ProFlex JUPITER

Film abrasive – 152 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.660 | P 1500 | 50 | 1000 |
| 154.661 | P 2000 | 50 | 1000 |
| 154.662 | P 2500 | 50 | 1000 |
| 154.663 | P 3000 | 50 | 1000 |

### DESCRIPTION

- Ultraflexible soft film disc
- Aluminium oxide grain

### AREA OF APPLICATION

- Dry sanding
- Finish

### BENEFITS

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
- Extremely fine sanding pattern
- Reduces the polishing time

### APPLICATION ADVICE

We recommend the use of the ProFlex Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.



## ProFlex JUPITER SOFT

Film abrasive – 152 mm – Multi hole

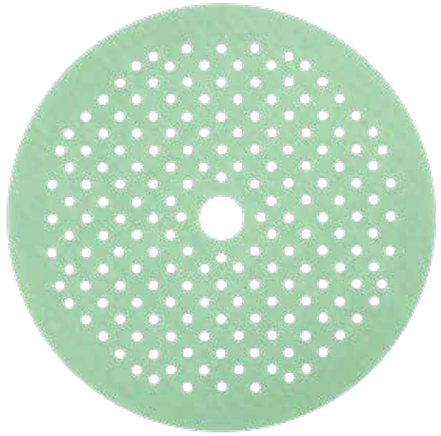

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.509 | P 600 | 15 | 300 |
| 156.510 | P 800 | 15 | 300 |
| 156.511 | P 1000 | 15 | 300 |
| 156.512 | P 1200 | 15 | 300 |
| 156.513 | P 1500 | 15 | 300 |
| 156.514 | P 2000 | 15 | 300 |

### DESCRIPTION

- Ultraflexible soft film disc with flexible foam back
- Multi hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Filler finish
- Blending
- Matting of surfaces
- Suitable for dry and wet sanding
- Manual or machine use

### BENEFITS

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern
- Comfortable sanding due to foam back

### APPLICATION ADVICE

We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth. We recommend using the CS Sanding Water SW20 for wet sanding.

## ProFlex JUPITER SOFT $H_2O$

Film abrasive – 152 mm – Multi hole

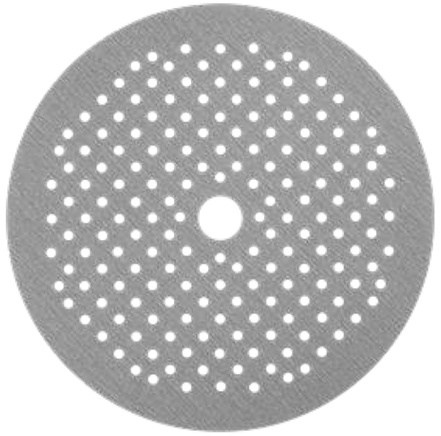

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.515 | P 2500 | 15 | 300 |
| 156.516 | P 3000 | 15 | 300 |
| 156.517 | P 4000 | 15 | 300 |

### DESCRIPTION

- Ultraflexible soft film disc with flexible foam back
- Multi hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Finish
- Flattening of removed imperfections
- Wet sanding

### BENEFITS

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back

### APPLICATION ADVICE

We recommend using the ProFlex Jupiter Soft $H_2O$ in combination with the CS Sanding Water SW20.

## ProFlex JUPITER

Film abrasive – 75 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.444 | P 600 | 50 | 1000 |
| 154.445 | P 800 | 50 | 1000 |
| 154.446 | P 1000 | 50 | 1000 |
| 154.447 | P 1200 | 50 | 1000 |
| 154.448 | P 1500 | 50 | 1000 |
| 153.466 | P 2000 | 50 | 1000 |
| 153.467 | P 2500 | 50 | 1000 |
| 153.468 | P 3000 | 50 | 1000 |
| 156.946 | P 4000 | 50 | 1000 |

### DESCRIPTION

- Ultraflexible soft film disc
- Aluminium oxide grain

### AREA OF APPLICATION

- Dry sanding
- Filler finish
- Blending
- Matting of surfaces
- Finish

### BENEFITS

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
- Extremely fine sanding pattern
- Reduces the polishing time

### APPLICATION ADVICE

We recommend the use of the ProFlex Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

## ProFlex JUPITER SOFT $H_2O$

Film abrasive – 77 mm – Multihole



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.524 | P 2500 | 15 | 300 |
| 156.525 | P 3000 | 15 | 300 |
| 156.526 | P 4000 | 15 | 300 |

### DESCRIPTION

- Ultraflexible soft film disc with flexible foam back
- Multi hole
- Aluminium oxide grain

### AREA OF APPLICATION

- Finish
- Flattening of removed imperfections
- Wet sanding

### BENEFITS

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back

### APPLICATION ADVICE

We recommend using the ProFlex Jupiter Soft $H_2O$ in combination with the CS Sanding Water SW20.



## ProFlex HYDRA

Foam abrasive – Ø 75 mm

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.461 | Grit 3000 | 15 | 300 |

### DESCRIPTION

- Mineral abrasive grain
- Flexible foam carrier

### AREA OF APPLICATION

- Smooth sanding right before polishing
- Fine re-sanding of coarser sanded spots
- Perfect to remove sanding scratches
- Ideally suited for wet sanding

### BENEFITS

- Time saving in the subsequent polishing process
- Long abrasive life
- Gentle and homogeneous matting

## ProFlex HYDRA

Foam abrasive – Ø 152 mm

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.463 | Grit 3000 | 15 | 300 |

### DESCRIPTION

- Mineral abrasive grain
- Flexible foam carrier

### AREA OF APPLICATION

- Smooth sanding right before polishing
- Fine re-sanding of coarser sanded spots
- Perfect to remove sanding scratches
- Ideally suited for wet sanding

### BENEFITS

- Time saving in the subsequent polishing process
- Long abrasive life
- Gentle and homogeneous matting

## ProFlex CALLISTO

Foam abrasive – 150 mm

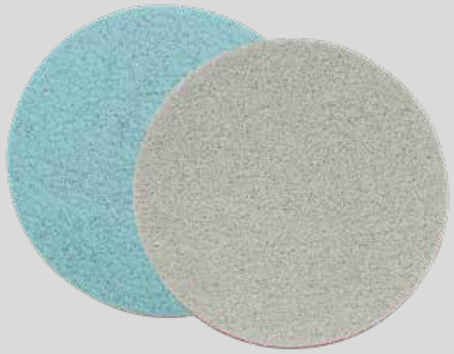

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.797 | Grit 3000 | 15 | 150 |
| 158.798 | Grit 6000 | 15 | 150 |

### DESCRIPTION

- Mineral abrasive grit
- Flexible foam backing

### AREA OF APPLICATION

- Smooth sanding right before polishing
- Perfect to remove sanding scratches
- Fine re-sanding of imperfections
- Ideally suited for wet sanding

### BENEFITS

- Time saving in the subsequent polishing process
- Long abrasive life
- Gentle and homogeneous matting




For industrial and professional use only.

## ProFlex CALLISTO

Foam abrasive – 77 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.795 | Grit 3000 | 15 | 540 |
| 158.796 | Grit 6000 | 15 | 540 |

### DESCRIPTION

- Mineral abrasive grit
- Flexible foam backing

### AREA OF APPLICATION

- Smooth sanding right before polishing
- Perfect to remove sanding scratches
- Fine re-sanding of imperfections
- Ideally suited for wet sanding

### BENEFITS

- Time saving in the subsequent polishing process
- Long abrasive life
- Gentle and homogeneous matting

For industrial and professional use only.

## ProFlex CALLISTO

Foam abrasive – 33 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.793 | Grit 3000 | 75 | 2700 |
| 158.794 | Grit 6000 | 75 | 2700 |

### DESCRIPTION

- Mineral abrasive grit
- Flexible foam backing

### AREA OF APPLICATION

- Smooth sanding right before polishing
- Perfect to remove sanding scratches
- Fine re-sanding of imperfections
- Ideally suited for wet sanding

### BENEFITS

- Time saving in the subsequent polishing process
- Long abrasive life
- Gentle and homogeneous matting

## TEC LINE PRO FINISH

Net abrasive – 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.983 | P 1000 | 20 | 120 |
| 152.984 | P 2000 | 20 | 120 |
| 153.256 | P 3000 | 20 | 120 |

### DESCRIPTION

- Net abrasive disc with a Velcro® foam back

### AREA OF APPLICATION

- Perfect for blending
- Matting of surfaces
- Finish
- Wet use (recommended)

### BENEFITS

- Extremely good dust extraction in dry use
- Almost dust-free sanding
- Perfect water transportation in wet use
- Extremely fine and even sanding pattern



## SANDING STRIPS F.23 CERAMIC

Film abrasive – Roll – 70 mm × 12 m

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.227 | P 80 | 1 | 20 |
| 159.228 | P 120 | 1 | 20 |
| 159.229 | P 180 | 1 | 20 |
| 159.230 | P 240 | 1 | 20 |
| 159.231 | P 320 | 1 | 20 |
| 159.232 | P 400 | 1 | 20 |
| 159.234 | P 600 | 1 | 20 |
| 159.235 | P 800 | 1 | 20 |

### DESCRIPTION

- High performance ceramic strips
- Optimised hole pattern with perforation
- Dimensions per tear: 70 × 100 mm
- Mineral grain mixture with ceramic content
- Strong, non-tearable foil carrier

### AREA OF APPLICATION

- Suitable for all sanding work from coarse to fine sanding

### BENEFITS

- Extremely fast stock removal thanks to ceramic abrasive grain
- Long service life and high durability thanks to ceramic abrasive grain
- Stearate coating reduces clogging of the abrasive
- Film backing ensures a homogeneous sanding result
- Suitable for all common sanding blocks (70 × 198 mm, 70 × 300 mm, 70 × 400 mm)

## TEC LINE N20

Net sanding strips 70 × 400 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.438 | P 80 | 50 | 200 |
| 157.439 | P 120 | 50 | 200 |
| 157.440 | P 180 | 50 | 200 |
| 157.441 | P 240 | 50 | 200 |
| 157.442 | P 320 | 50 | 200 |
| 157.443 | P 400 | 50 | 200 |

### DESCRIPTION

- Net sanding stripes
- Special coating
- Aluminium oxide grain

### AREA OF APPLICATION

- Suitable for every sanding application on putties and fillers from coarse to fine sanding

### BENEFITS

- Due to the perforation of the individual stripes, the Tec Line N20 can be used on both 70 × 400 mm and 70 × 200 mm tools
- Extremely dust-reduced sanding
- The characteristic of the net provides a very long lifetime

## SANDING FLEECE V.19

Sanding Fleece – Roll – 115 mm × 10 m



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.039 | Very fine / red | 1 | 10 |
| 156.040 | Ultra fine / grey | 1 | 10 |

### DESCRIPTION

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

### AREA OF APPLICATION

- Matting of corners, roundings or sharp edges prior to filler or paint application
- Red – very fine: prior to filler application
- Grey – ultra fine: prior to paint application

### BENEFITS

- High cutting power
- Suitable for wet and dry sanding
- On a roll for easy cut off in the needed lenght

### APPLICATION ADVICE

Perfectly suitable with the Carsystem matting pastes.

## SANDING FLEECE V.19

Sanding Fleece – Pad – 115 × 230 mm

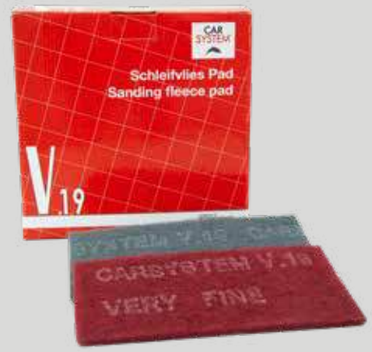


| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.041 | Very fine / red | 25 | 200 |
| 156.042 | Ultra fine / grey | 25 | 200 |

### DESCRIPTION

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

### AREA OF APPLICATION

- Matting of corners, roundings or sharp edges prior to filler or paint application
- Red – very fine: prior to filler application
- Grey – ultra fine: prior to paint application

### BENEFITS

- High cutting power
- Suitable for wet and dry sanding

### APPLICATION ADVICE

Perfectly suitable with the Carsystem matting pastes.



## SANDING FLEECE V.19

Sanding Fleece – Disc



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.691 | Very fine / red / 80 mm | 25 | 1000 |
| 156.690 | Ultra fine / grey / 80 mm | 25 | 1000 |
| 156.044 | Very fine / red / 150 mm | 20 | 160 |
| 156.045 | Ultra fine / grey / 150 mm | 20 | 160 |

### DESCRIPTION

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

### AREA OF APPLICATION

- Matting and dust removal on large surfaces by machine
- Red – very fine: prior to filler application
- Grey – ultra fine: prior to paint application

### BENEFITS

- Removes dust and prepares the surface for filler or paint application
- Suitable for wet and dry sanding

### APPLICATION ADVICE

Perfectly suitable with the Carsystem matting pastes.

## TEC LINE MATTFLEX PREMIUM

Sanding Fleece – Roll – 115 mm × 10 m



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.616 | Very fine / red | 1 | 5 |
| 151.617 | Ultra fine / grey | 1 | 5 |

### DESCRIPTION

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

### AREA OF APPLICATION

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Red – very fine: prior to filler application
- Grey – ultra fine: prior to paint application

### BENEFITS

- High flexibility
- On a roll for easy cut off in the needed length

### APPLICATION ADVICE

Perfectly suitable with the Carsystem matting pastes.

## TEC LINE MATTFLEX PAD

Sanding fleece – Pad – 115 × 230 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.686 | Very fine / red | 25 | 100 |
| 157.444 | Extra fine / black | 25 | 100 |
| 152.687 | Ultra fine / grey | 25 | 100 |
| 152.688 | Micro fine / gold | 25 | 100 |

### DESCRIPTION

- Sanding fleece with three dimensional structure
- The synthetic resin soaks through the fleece and distributes the sanding grain all over

### AREA OF APPLICATION

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Red – very fine: prior to filler application
- Black – extra fine: prior to paint application
- Grey – ultra fine: prior to paint application – especially for blending zones
- Gold – micro fine: prior to paint application – especially for blending zones

### BENEFITS

- Extremely fine sanding pattern
- Very thin und extremely flexible
- Suitable for wet and dry sanding

### APPLICATION ADVICE

Perfectly suitable with the Carsystem matting pastes.

## TEC LINE SOFTFLEX

Paper abrasive – Roll – 115 × 125 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.689 | P 150 | 1 | 5 |
| 152.690 | P 180 | 1 | 5 |
| 152.691 | P 240 | 1 | 5 |
| 152.692 | P 320 | 1 | 5 |
| 152.693 | P 400 | 1 | 5 |
| 152.694 | P 500 | 1 | 5 |
| 152.695 | P 600 | 1 | 5 |
| 152.696 | P 800 | 1 | 5 |

### DESCRIPTION

- Paper-based abrasive with foam back
- Roll with tear-off perforation
- 200 tear-offs / box

### AREA OF APPLICATION

- Manual sanding of curves and hard-to-reach areas
- Suitable from coarse to fine sanding

### BENEFITS

- Flexibility due to the foam back

For industrial and professional use only.



# SOFT-ROLL

NEW

Paper abrasive – Roll – 115 × 125 mm




### DESCRIPTION

- Paper-based abrasive with foam back
- Roll with tear-off perforation
- 200 tear-offs / box

### AREA OF APPLICATION

- Manual sanding of curves and hard-to-reach areas
- Suitable from coarse to fine sanding

### BENEFITS

- Flexibility due to the foam back
- Also available in P1000

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.422 | P 120 | 1 | 5 |
| 159.423 | P 180 | 1 | 5 |
| 159.424 | P 240 | 1 | 5 |
| 159.425 | P 320 | 1 | 5 |
| 159.426 | P 400 | 1 | 5 |
| 159.427 | P 500 | 1 | 5 |
| 159.428 | P 600 | 1 | 5 |
| 159.429 | P 800 | 1 | 5 |
| 159.430 | P 1000 | 1 | 5 |

For industrial and professional use only.

## DOUBLE SANDING SOFT PAD

Foam abrasive – 120 × 98 × 13 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.774 | Fine / P320 – P400 / clear | 15 | 60 |
| 158.775 | Super fine / P400 – P500 / green | 15 | 60 |
| 158.776 | Ultra fine / P1000 – P1200 / blue | 15 | 60 |

### DESCRIPTION

- Double-sided soft pad with foam back
- Coloured aluminium oxide grain

### AREA OF APPLICATION

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Fine: prior to filler application
- Super fine and ultra fine: prior to paint application

### BENEFITS

- Very flexible
- Perfect adaption on every curve
- For wet or dry use
- Colour coding for easy assignment

## CLASSICLINE SOFT PAD

Foam abrasive – 140 × 115 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.924 | Medium / P 220 – P 280 | 40 | 160 |
| 138.925 | Fine / P 320 – P 400 | 40 | 160 |
| 138.926 | Super fine / P 400 – P 500 | 40 | 160 |
| 138.927 | Ultra fine / P 800 – P 1200 | 40 | 160 |

### DESCRIPTION

- Soft pad with foam back
- Aluminium oxide grain

### AREA OF APPLICATION

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Medium and fine: prior to filler application
- Super fine and ultra fine: prior to paint application

### BENEFITS

- Very flexible
- Perfect adaption on every curve
- For wet or dry use



## TOPLINE SOFT PAD

Foam abrasive – 140 × 115 mm

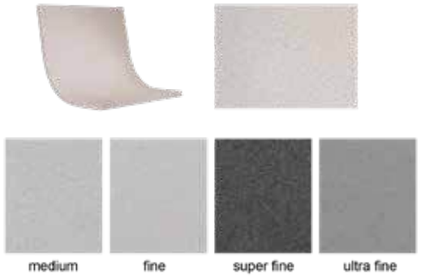


| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.251 | Medium / P 280 – P 360 | 40 | 40 |
| 126.252 | Fine / P 400 – P 500 | 40 | 40 |
| 126.253 | Super fine / P 600 – P 800 | 40 | 40 |
| 126.254 | Ultra fine / P 1000 – P 1200 | 40 | 40 |

### DESCRIPTION

- Soft pad with foam back
- Aluminium oxide grain

### AREA OF APPLICATION

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Medium: prior to filler application
- Fine and ultra fine: prior to paint application

### BENEFITS

- Very fine sanding pattern
- Very flexible
- Perfect adaption on every curve
- For wet or dry use

## PROFLEX NEPTUNE

Film abrasive – 130 × 170 mm

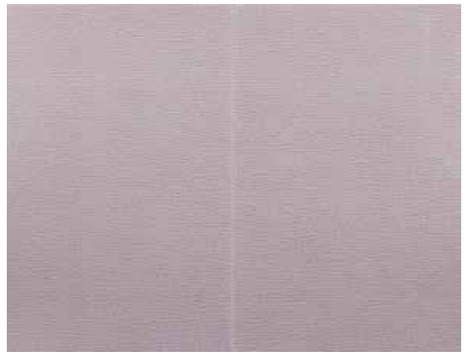

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.472 | P 600 | 50 | 1000 |
| 153.473 | P 800 | 50 | 1000 |
| 154.454 | P 1000 | 50 | 1000 |
| 154.455 | P 1200 | 50 | 1000 |
| 153.474 | P 1500 | 50 | 1000 |

### DESCRIPTION

- Ultraflexible soft film sanding sheet
- Aluminium oxide grain
- Perforated in the middle

### AREA OF APPLICATION

- Filler finish
- Blending
- Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples

### BENEFITS

- Ultraflexible basis adapts perfectly to the surface
- Extremely fine sanding pattern

### APPLICATION ADVICE

We recommend the use of the PROFLEX Neptune Pads Max Grip.

## ProFlex NEPTUNE SOFT

Film abrasive – 130 × 85 mm – Multihole

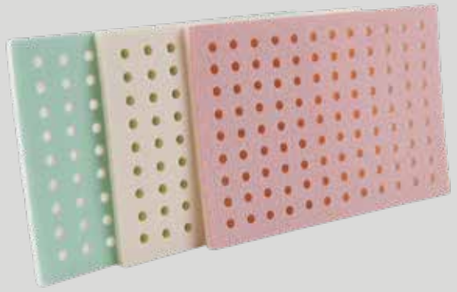

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.791 | P 600 | 20 | 400 |
| 157.792 | P 800 | 20 | 400 |
| 157.794 | P 1000 | 20 | 400 |

### DESCRIPTION

- Ultraflexible soft film sheet with flexible foam back
- Multihole
- Aluminium oxide grain

### AREA OF APPLICATION

- Filler finish
- Blending
- Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples
- Suitable for dry and wet sanding

### BENEFITS

- Ultraflexible basis adapts perfectly to the surface
- Extremely fine sanding pattern
- Comfortable sanding due to foam back

### APPLICATION ADVICE

We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth. We recommend using ProFlex Neptune Soft with the Carsystem ProFlex Neptune Pad MaxGrip. When using wet: We recommend the Carsystem Sanding Water SW20.

## ProFlex MERCURY

Film abrasive – 29 × 35 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.437 | P 1500 | 200 | 4000 |
| 153.460 | P 2000 | 200 | 4000 |
| 153.461 | P 2500 | 200 | 4000 |
| 153.462 | P 3000 | 200 | 4000 |

### DESCRIPTION

- Film-based sanding sheets
- Self adhesive
- Aluminium oxide grain

### AREA OF APPLICATION

- Removing of imperfections in the surface
- Finish
- Flattening of removed imperfections

### BENEFITS

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible
- Also suitable for slightly larger areas

### APPLICATION ADVICE

We recommend the use of the ProFlex Mercury block soft or hard. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

For industrial and professional use only.



## ProFlex PLUTO

Film abrasive – 34 mm

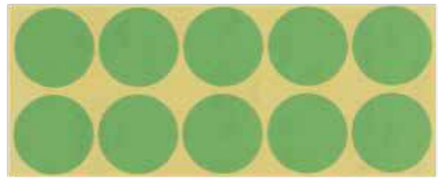

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.428 | P 1500 | 100 | 6000 |
| 154.429 | P 2000 | 100 | 6000 |
| 154.430 | P 2500 | 100 | 6000 |
| 154.431 | P 3000 | 100 | 6000 |
| 154.432 | P 4000 | 100 | 6000 |
| 154.433 | P 5000 | 100 | 6000 |

### DESCRIPTION

- Film-based daisy disc
- Self adhesive
- Aluminium oxide grain

### AREA OF APPLICATION

- Removing of imperfections in the surface
- Finish
- Flattening of removed imperfections

### BENEFITS

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible

### APPLICATION ADVICE

We recommend the use of the ProFlex Back Pad 30 mm PSA for machine sanding and the Pluto Sanding Blocks for manual use. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

## ProFlex STYX

Film abrasive – Ø 32 mm

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.738 | P 1500 / petrol-blue | 100 | 6000 |
| 159.739 | P 3000 / greyish-green | 100 | 6000 |

### DESCRIPTION

- Film-based daisy disc
- Self adhesive

### AREA OF APPLICATION

- Removing of imperfections in the surface
- Finish
- Flattening of removed imperfections
- Ideally suited for wet sanding

### BENEFITS

- Extremely fast removal of imperfections
- Grit P3000 can be used as a One Step Solution

### APPLICATION ADVICE

For machine sanding we recommend the ProFlex Back Pad 30 mm PSA or the IFP Grip To Stick 30 mm. Regular intermediate cleaning or moistening of the abrasive is also recommended.

For industrial and professional use only.

## TOPLINE WP S

Paper abrasive – 230 × 280 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 136.676 | P 80 | 50 | 500 |
| 136.677 | P 120 | 50 | 500 |
| 136.678 | P 180 | 50 | 500 |
| 136.679 | P 220 | 100 | 1000 |
| 136.680 | P 240 | 100 | 1000 |
| 136.681 | P 280 | 100 | 1000 |
| 136.682 | P 320 | 100 | 1000 |
| 136.683 | P 360 | 100 | 1000 |
| 136.684 | P 400 | 100 | 1000 |
| 136.685 | P 500 | 100 | 1000 |
| 136.686 | P 600 | 100 | 1000 |
| 136.687 | P 800 | 100 | 1000 |
| 136.688 | P 1000 | 100 | 1000 |
| 136.689 | P 1200 | 100 | 1000 |
| 136.690 | P 1500 | 100 | 1000 |
| 136.691 | P 2000 | 100 | 1000 |

### DESCRIPTION

- Wet sanding paper
- Silicon carbide grain
- Flexible latex reinforced A-paper P80 – P180
- Smooth latex reinforced C-paper P220 – P2000

### AREA OF APPLICATION

- Wet sanding of filler coated or painted surfaces

### BENEFITS

- Very high cutting power due to the silicon carbide grain
- Highest flexibility after short soaking time due to the high quality latex reinforced paper

## STRIPPING DISC

Raw cleaning disc



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 127.999 | 100 mm | 10 | 10 |
| 128.000 | 150 mm | 10 | 10 |

### DESCRIPTION

- Cleaning disc for removing semi-soft materials and paint by machine

### AREA OF APPLICATION

- Removing of semi-soft materials like underbody coating, stone chip protection, sealing compounds, paint and rust by machine

### BENEFITS

- The substrate remains undamaged

### APPLICATION ADVICE

100 mm = max. 6,000 rpm.
150 mm = max. 4,000 rpm.

## TAPE OFF DISC PREMIUM

Sticker removal disc



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.013 | 90 mm / set of 2 discs + 1 adapter | 1 | 50 |

### DESCRIPTION

- Sticker removal disc
- Caramel smell

### AREA OF APPLICATION

- Residue-free removal of stickers, decorative stripes, decals etc.

### BENEFITS

- No discoloration of the paint

### APPLICATION ADVICE

Max. 4,000 r/pm

## SANDING WATER SW20

Sanding water




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.446 | Incl. spray nozzle / 1 l | 1 | 14 |
| 157.447 | 5 l | 1 | 4 |

### DESCRIPTION

- Sanding water
- Free of silicones

### AREA OF APPLICATION

- Wet sanding on clearcoat

### BENEFITS

- Extends the lifetime of the abrasive
- Optimizes the wetting of the abrasive
- Foaming prevents the tying of the sanding dust with the water

### APPLICATION ADVICE

We recommend using the Carsystem Sanding Water SW20 in combination with ProFlex Jupiter Soft $H_2O$ and all other sanding media.

For industrial and professional use only.

## EXCENTER BACK PAD T.19

Back pad – 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.564 | Soft / grip / M8 and 5/16" | 1 | 50 |
| 156.227 | Medium / grip / M8 and 5/16" | 1 | 50 |
| 156.563 | Hard / grip / M8 and 5/16" | 1 | 50 |

### DESCRIPTION

- Back pad with Carsystem hole pattern
- 25 holes and oval center hole
- Three degrees of hardness: Soft, medium, hard

### AREA OF APPLICATION

- Soft = Lowest cutting power highest flexibility
- Medium = Balance between cutting power and flexibility
- Hard = Highest cutting power – lowest flexibility

### BENEFITS

- Individual due to the 3 different degrees of hardness

## RUPES BACK PAD

Back pad, 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.291 | Rupes 981.500 – M8 / 150 mm | 1 | 10 |
| 158.292 | Rupes 981.600 / 5/16 " / 150 mm | 1 | 10 |

### DESCRIPTION

- Back pad with multi hole pattern
- Strength: Hard
- Thread-M8: RUPES TA-ER-BR-RH-machines
- Thread-5/16": RUPES Skorpio E RX



## EXCENTER BACK PAD MULTI M

Back pad – 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.570 | Grip | 1 | 100 |

### DESCRIPTION

- Multi-hole excenter back pad
- Degree of hardness: Medium
- Suitable for all commercially available excenter machines
- Incl. M8 and 5/16“ screws and Festool special adapter

### AREA OF APPLICATION

- Universal back pad for dry sanding work

## FINISH SANDER BACK PAD

Back pad – 77 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.917 | 5/16" UNF connections | 1 | 1 |

### DESCRIPTION

- Replacement back pad for Finish Sander RC 9332
- Thread: 5/16" (fixed screw)

## ProFlex BACK PAD PSA

Back pad – 30 mm

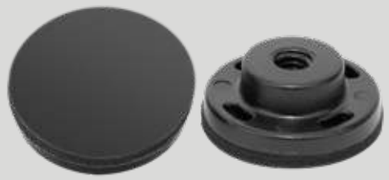

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.153 | Stick / 1/4" inner thread | 2 | 2 |

### DESCRIPTION

- PSA cellular rubber back pad for ProFlex Pluto daisy discs

### AREA OF APPLICATION

- Usable with the CS Mini Sanding Macine
- Usable with the ProFlex Pluto daisy discs

### BENEFITS

- Perfect balance between cutting power and even sanding pattern in the final sanding process

## MINI BACK PAD

Finish back pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.768 | Medium / stick / 28 mm | 1 | 5 |
| 144.769 | Medium / grip / 28 mm | 1 | 5 |

### DESCRIPTION

- Replacement back pad for mini sanding machine RC 9330
- For self-adhesive discs / Velcro® discs
- Inner tread 1/4"

## INTERFACE PAD

Interface pad - 150 mmInterface pad – 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.225 | 10 mm | 2 | 50 |
| 156.226 | 5 mm | 2 | 50 |

### DESCRIPTION

- Interface pad with Carsystem hole pattern
- 25 holes and oval center hole
- The hole pattern is based on the 15 hole pattern and 10 additional holes
- Thickness: 5 mm + 10 mm

### AREA OF APPLICATION

- Sanding on all areas with curves, roundings and edges
- Usable with the Carsystem P.19, F.19 and F.23 sanding discs

### BENEFITS

- Perfect adaption to the surface
- Minimizes the risk of sanding through
- The oval middle-hole helps to align the sanding disc

## SOFT INTERFACE PAD

Interface pad – 150 mm

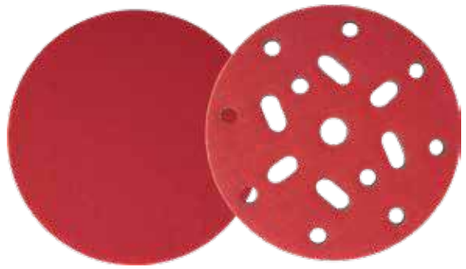

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.585 | Grip / no holes | 2 | 10 |
| 140.584 | Grip / universal | 2 | 10 |

### DESCRIPTION

- Universal interface pad
- Multi hole interface pad for all common hole systems

### AREA OF APPLICATION

- Sanding on all areas with curves, roundings and edges

### BENEFITS

- Perfect adaption to the surface
- Minimizes the risk of sanding through

## ProFlex INTERFACE PAD FINISH

Interface pad - 150 mm - 15 holes




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.078 | Velcro® Loop Back | 2 | 350 |

### DESCRIPTION

- Interface pad with female Velcro® loop back

### AREA OF APPLICATION

- Ideal for use with ProFlex Jupiter discs

### BENEFITS

- Finer sanding pattern
- Reduction of polishing time

## ProFlex INTERFACE PAD FINISH

Interface pad - 75 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.079 | Velcro® Loop Back | 4 | 600 |

### DESCRIPTION

- Interface pad with female Velcro® loop back

### AREA OF APPLICATION

- Ideal for use with ProFlex Jupiter discs

### BENEFITS

- Finer sanding pattern
- Reduction of polishing time

## ProFlex INTERFACE PAD

Interface pad – 150 mm – 15 holes



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.295 | Soft / 10 mm | 1 | 20 |
| 154.193 | Medium / 10 mm | 1 | 20 |
| 155.100 | Hard / 5 mm | 1 | 30 |

### DESCRIPTION

- Interface pads with micro Velcro® for ProFlex Jupiter sanding discs
- Three degree's of hardness: Soft, medium, hard
- Soft / Medium: 10 mm thickness
- Hard: 5 mm thickness

### AREA OF APPLICATION

- The micro Velcro® allows the use of soft film discs (ProFlex Jupiter)
- Soft = finest sanding pattern for final finish sanding
- Medium = balance between cutting power and evenness
- Hard = highest cutting power

### BENEFITS

- Selection of three different degrees of hardness
- Micro Velcro® does not provoke scratches through the soft film abrasive

For industrial and professional use only.



## ProFlex INTERFACE PAD

Interface pad – 75 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.296 | Soft / 10 mm | 1 | 20 |
| 154.194 | Medium / 10 mm | 1 | 20 |
| 155.098 | Hard / 5 mm | 1 | 30 |

### DESCRIPTION

- Interface pad with micro Velcro® for ProFlex Jupiter sanding discs
- Three degrees of hardness: Hard, medium, soft
- Soft / Medium: 10 thickmess
- Hard: 5 mm thickness

### AREA OF APPLICATION

- The micro Velcro® allows the use of soft film discs (ProFlex Jupiter)
- Soft = finest sanding pattern for final finish sanding
- Medium = balance between cutting power and evenness
- Hard = highest cutting power

### BENEFITS

- Selection between three different degrees of hardness
- Micro Velcro® does not provoke scratches through the soft film

For industrial and professional use only.

## ProFlex INTERFACE PAD

Interface pad – 30 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.137 | Hard / 5 mm | 5 | 500 |

### DESCRIPTION

- Interface pad with micro Velcro® for ProFlex Jupiter daisy discs
- Cellular rubber pad
- Thickness: 5 mm

### AREA OF APPLICATION

- Usable with the ProFlex Jupiter daisy discs

### BENEFITS

- Hard cellular rubber provides more stability and cutting power
- Micro Velcro® does not provoke scratches through the soft film

## PAD SAVER

Interface pad – 150 mm



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.099 | Pad Saver / 5 pcs. /bag | 1 | 100 |

### DESCRIPTION

- Interface pad with multi holes for all common hole systems
- Thickness: 3 mm

### AREA OF APPLICATION

- The Pad Saver is used as a second Velcro® layer

### BENEFITS

- Saves the original Velcro® layer of the excenter back pad

## GRIP TO STICK INTERFACE PAD

Interface pad – Ø 30 mm

NEW

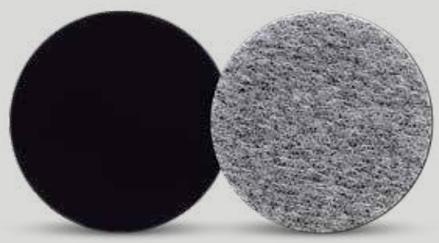

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.677 | 5 pcs / pack / Ø 30 mm | 5 | 250 |

### DESCRIPTION

- Interface pad with adhesive backing

### AREA OF APPLICATION

- Finish
- Removing of imperfections in the surface

### BENEFITS

- No need to change the backing pad on the sanding machine
- Provides the perfect balance of dampening and stock removal
- Reduces finish polishing time

### APPLICATION ADVICE

We recommend the use with our Carsystem cordless polisher CSH-CMS01 and ProFlex Styx and Pluto sanding sheets

## ProFlex NEPTUNE PAD MAXGRIP

Hand pad - 120 x 75 x 6 mm - multihole

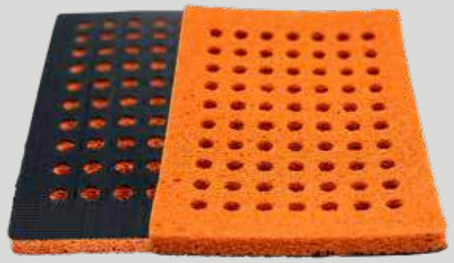

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.097 | Soft – medium | 1 | 100 |

### DESCRIPTION

- Sponge hand pad
- Micro Velcro®
- Degree of hardness: Soft – Medium

### AREA OF APPLICATION

- Hand pad for all Neptune sanding sheets

### BENEFITS

- Non-slip
- Ideal for dry and wet sanding with excellent water transport (Neptune Soft)
- Very comfortable feeling
- Adapts perfectly to the surface

For industrial and professional use only.



## SANDING BLOCK 400 GRIP FLEX

Hand sanding block – Velcro®



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.088 | 14 holes / 70 × 400 mm | 1 | 5 |

### DESCRIPTION

- Flexible hand sanding file with dust extraction
- Free variable for concave and convex surfaces

### AREA OF APPLICATION

- Usable with Carsystem F.23 ceramic sanding strips and Carsystem N20 net sanding strips

### BENEFITS

- For even, concave and convex surfaces

## SANDING BLOCK 400 2.0

Hand sanding block 400 2.0

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.534 | Multi holes / 70 × 400 mm | 1 | 15 |

### DESCRIPTION

- Hand sanding block made of plastic
- Optimised suction adapted to the F.23 Ceramic hole pattern
- Rubberised handles

### AREA OF APPLICATION

- Usable with Carsystem Sanding Strips F.23 Ceramic and Carsystem N20 net sanding strips

### BENEFITS

- Optimised suction prevents clogging of the abrasive
- Rubberised handles for more control during sanding

For industrial and professional use only.

## SANDING BLOCK 300

Hand sanding block -Velcro®




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.571 | 70 × 300 mm | 1 | 50 |

### DESCRIPTION

- Hand sanding block made of medium-strength foam with Velcro ®
- All-round handle

### AREA OF APPLICATION

- For processing the Sanding Strips F.23 Ceramic (3 tear-offs)

### BENEFITS

- Suitable for wet and dry sanding
- All-round handle provides a secure hold
- Adapts to any vehicle contour

## SANDING BLOCK 198 2.0

Hand sanding – Velcro®




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.535 | Multi holes / 70 × 198 mm | 1 | 50 |

### DESCRIPTION

- Hand sanding block with dust extraction

### AREA OF APPLICATION

- Usable with Carsystem F.23 ceramic sanding strips and N20 net sanding strips

### BENEFITS

- Rubberised handles for more control during sanding

## SANDING BLOCK 198 KIT

Hand sanding block set – Velcro®



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.702 | 22 holes / 70 × 198 mm | 1 | 1 |

### DESCRIPTION

- Set of hand sanding blocks with adjustable dust extraction
- Four exchangeable base plates for flat, concave and convex surfaces
- Multi hole for all common sanding strips

### AREA OF APPLICATION

- Usable with Carsystem f.23 ceramic sanding strips 70 × 198 mm and N20 net sanding strips

### BENEFITS

- Four exchangeable base plates for flat, concave and convex surfaces

## SANDING BLOCK DISC KIT 150

Hand sanding block set – Velcro®



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.904 | 15 holes / 150 mm | 1 | 1 |

### DESCRIPTION

- Set of hand sanding blocks with adjustable dust extraction
- Four exchangeable base plates for flat, concave and convex surfaces
- Multi hole for all common sanding discs

### AREA OF APPLICATION

- Usable with 150 mm sanding discs with Velcro®

### BENEFITS

- Four exchangeable base plates for flat, concave and convex surfaces
- Dust extraction valve adjustable

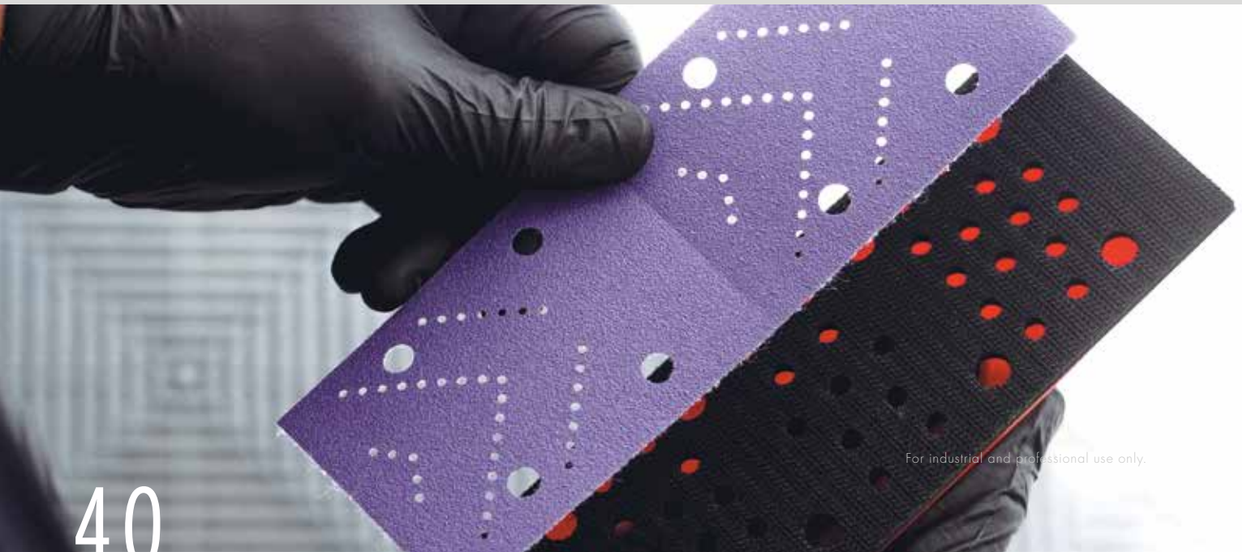


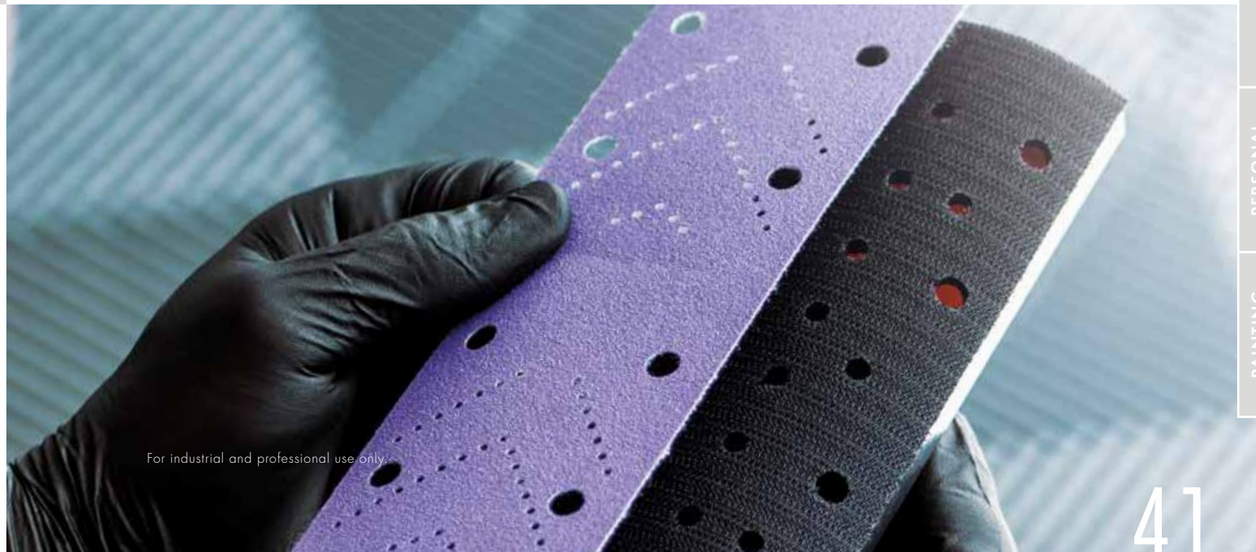

## SANDING BLOCK GRIP

Hand sanding block – Velcro®



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.439 | 150 mm | 1 | 6 |

### DESCRIPTION

- Polyurethane hand sanding blocks

### AREA OF APPLICATION

- Usable with 150 mm Velcro® discs

## SANDING BLOCK GRIP BOX

Hand sanding blocks – Velcro®



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.009 | Velcro® 150 mm | 1 | 16 |

### DESCRIPTION

- Polyurethane hand sanding blocks
- Four different blocks, for even, concave and convex surfaces

### AREA OF APPLICATION

- Usable with 150 mm sanding discs with Velcro®

### BENEFITS

- Sanding blocks for even, concave and convex surfaces

## SANDING BLOCK HARD

Hand sanding block – hard



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.431 | 125 mm × 70 mm | 1 | 12 |

### DESCRIPTION

- Hard rubber sanding block

### AREA OF APPLICATION

- Levelling surfaces
- Wet and dry sanding

## ProFlex PLUTO SANDING BLOCK

Sanding block



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.557 | Soft / red | 2 | 100 |
| 156.556 | Hard / black | 2 | 100 |

### DESCRIPTION

- Rubber block for the use with Pluto daisy discs
- Two degrees of hardness: Soft + hard

### AREA OF APPLICATION

- Soft: Flattening of imperfections (more flexible)
- Hard: Flattening of dust inclusions

### BENEFITS

- Usable on both sides
- Two degrees of hardness for the whole finish process.
- Rounded edges perfect for smooth roundings.







## ProFlex MERCURY SANDING BLOCK

Sanding block – 27 × 33 × 15 mm




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.173 | Hard / black | 2 | 100 |
| 156.555 | Soft / red | 2 | 100 |

### DESCRIPTION

- Rubber block for the use with ProFlex Mercury sheets
- Two degrees of hardness: Soft and hard

### AREA OF APPLICATION

- Soft: Flattening of imperfections (more flexible)
- Hard: Flattening of dust inclusions

### BENEFITS

- Usable on both sides
- Two degrees of hardness for the whole finish process

## FINE BLOCK

Fine sanding block



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.979 | 800 | 1 | 10 |
| 140.980 | 1500 | 1 | 10 |
| 140.981 | 2000 | 1 | 10 |
| 140.982 | 3000 | 1 | 10 |

### DESCRIPTION

- Carbon fine sanding block

### AREA OF APPLICATION

- Removal of bigger paint imperfections e. g. paint drops or large dust inclusions

### BENEFITS

- Self sharpening

### APPLICATION ADVICE

We recommend using the fine sanding block only wet. Soak thoroughly before the initial use for at least 15 min. The fine block should not get dry again after being soaked for the first time.

For industrial and professional use only.



## PAINT PLANER

Paint planer and holder



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.995 | Paint Planer | 1 | 1 |
| 142.996 | Holder | 1 | 1 |

### DESCRIPTION

- Paint planer and holder
- The front side of the holder is for storing the paint planer
- The back sides can hold Velcro® adhesive daisy discs

### AREA OF APPLICATION

- Removal of paint imperfections

For industrial and professional use only.

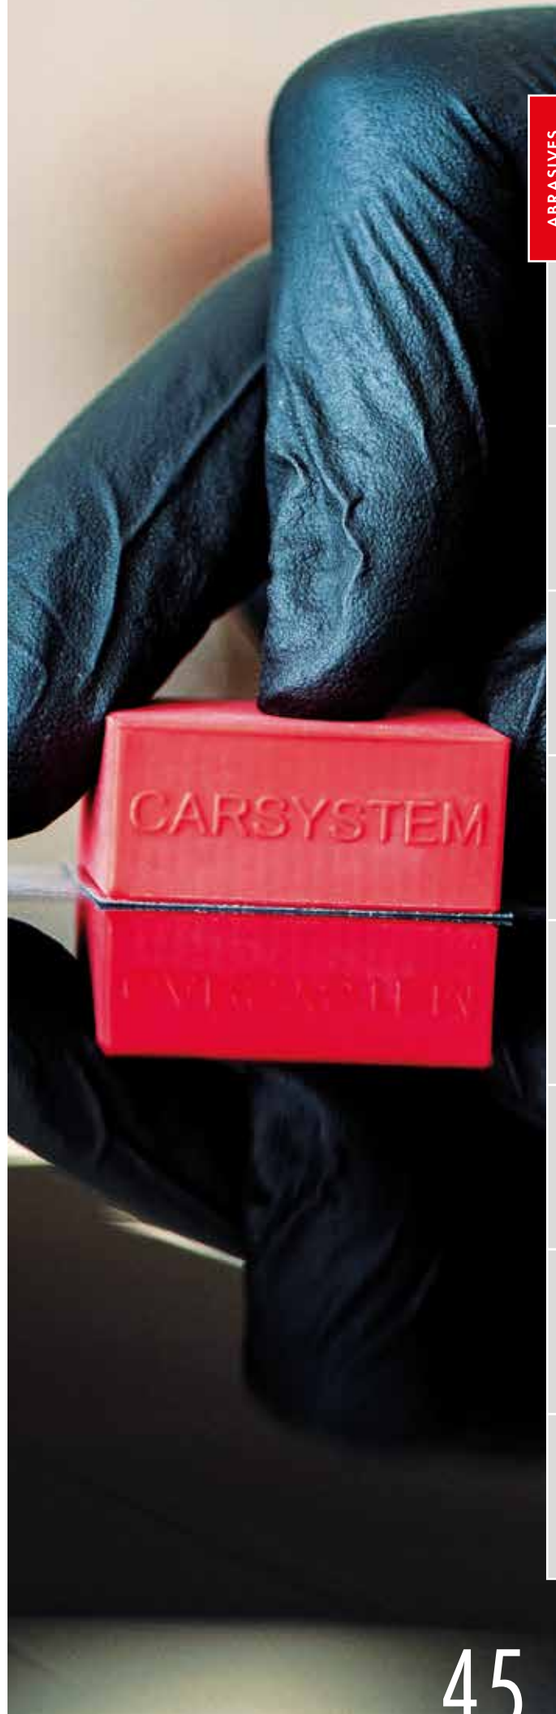

# DRY COAT 2.0 – STARTER SET

Control Powder black




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.486 | Starter Set / black / 2×30 g incl. | 1 | 8 |
| 158.488 | Dry Coat 2.0 foam ring set of 2 | 1 | 200 |
| 158.489 | Refill, 2er Pack / schwarz / 30 g | 1 | 120 |
| 158.490 | Refill, 2er Pack / orange / 15 g | 1 | 120 |

## DESCRIPTION

- Finest sanding control powder in a modified edition set
- Starter-Set: Applicator + fine-foam ring (Velcro®) + 2 × 30 g powder cartridge + storage tray
- Control powder cartridges black
- Basic-material: Natron lime-borosilicate-glass

## AREA OF APPLICATION

- Sanding control on putty, filler and primer
- Colour: Black – for light surfaces
- Colour: Orange – for dark surfaces

## BENEFITS

- Makes finest imperfections and pinholes visible
- Aerosol- and solvent-free / control powder – does not clog the abrasive
- Easy one-hand-application
- Simple cartridge change due to the Velcro foam ring
- Sustainable storage tray (parking area) included
- Individual components can be ordered: foam rings, powder cartridges

## APPLICATION ADVICE

The control powder reaches deep into all imperfections of the surfaces, so all kind of scratches, pinholes become visible.The Carsystem Dry Coat 2.0 requires no drying time or masking. The control powder can be sanded immediately after application.







For industrial and professional use only.

**1.** ERGONOMIC APPLICATOR with functional notch for the optimal pressure point.



**2.** FINE-PORED, REPLACEABLE FOAM RING WITH VELCRO BACKING.



**3.** BLACK CONTROL POWDER CARTRIDGES (2 × 30 G).




**4.** PARKING AREA FOR SUSTAINABLE AND CLEAN STORAGE..

For industrial and professional use only.

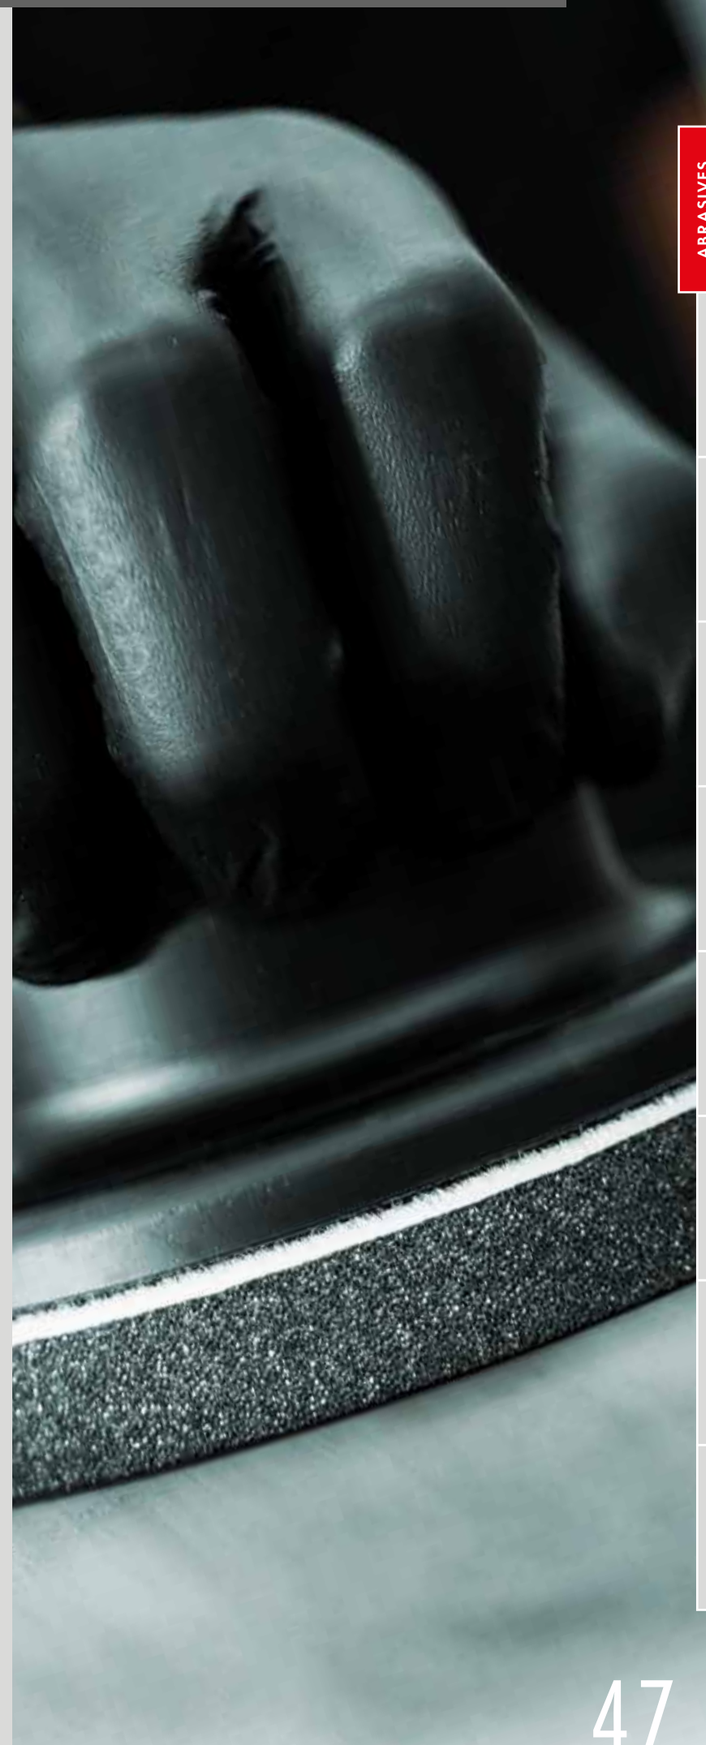

## CONTROL-SPRAY

Sanding control spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.779 | 400 ml | 1 | 12 |

### DESCRIPTION

- Black sanding control spray puts a layer of control paint onto the surface to make sanding imperfections visible
- Colour: Black

### AREA OF APPLICATION

- Sanding control of putty or fillered surfaces

### BENEFITS

- Makes finest imperfections in the surface visible
- Fast drying, grease and silicone-free

## TEC LINE MATT MATTING MOUSSE

Matting paste




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.947 | 1.0 kg | 1 | 6 |

### DESCRIPTION

- Water-based matting paste
- Colour: Light grey

### AREA OF APPLICATION

- Blending
- Matting of transition zones
- Degreasing and cleaning of body parts

### BENEFITS

- Suitable for paint or plastic parts
- Sanding, cleaning and degreasing in one step
- Improves the adhesion of the paint layer
- Perfect matting result
- Removes silicones and waxes from the surface

### APPLICATION ADVICE

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 159.696).



## PREP & SCUFF

Matting paste




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.547 | 1.3 kg | 1 | 6 |

### DESCRIPTION

- Water-based matting paste
- Colour: Light grey

### AREA OF APPLICATION

- Blending
- Matting of transition zones
- Degreasing and cleaning of body parts

### BENEFITS

- Sanding, cleaning and degreasing in one step
- Improves the adhesion of the paint layer
- Even matting
- Removes silicones and waxes from the surface

### APPLICATION ADVICE

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 159.696).

## PREP-BRUSH

Special brush



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.696 | 5 cm | 1 | 24 |

### DESCRIPTION

- Special brush for matting pastes

### AREA OF APPLICATION

- For applying matting pastes on hard-to-reach areas

## RUPES SKORPIO III RH

Random orbital sander, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.334 | RH353A / 3 mm orbital diameter | 1 | 1 |
| 157.335 | RH356A / 6 mm orbital diameter | 1 | 1 |

### DESCRIPTION

- Pneumatic random orbital single-hand sander
- 3mm / 6mm / 9mm orbital diameter
- Ø Velcro® back pad: 150mm
- Adjustable speed up to 11,000 rpm.
- Thread: M8

## EXCENTER CLASSIC

Random orbital sander, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.653 | Without back pad / 5 mm orbital diameter | 1 | 1 |
| 146.626 | Connecting piece | 1 | 1 |

### DESCRIPTION

- Pneumatic random orbital sander without back pad
- 5 mm orbital diamenter
- Thread: 5/16" – 24 inner thread

### AREA OF APPLICATION

- For corse sanding

## RUPES SKORPIO E RX

Random orbital sander, electric



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.326 | RX253A / 3 mm orbital diameter | 1 | 1 |
| 157.328 | RX256A / 6 mm orbital diameter | 1 | 1 |
| 158.292 | Rupes 981.600 / 5/16 " / 150 mm | 1 | 1 |

### DESCRIPTION

- Electric random orbital single-hand sander
- 3 mm / 6 mm orbital diameter
- Ø Velcro® back pad: 150 mm
- Adjustable speed up to 10,000 rpm.
- Inner thread: 5/16"
- Power: 250 Watt

## RUPES ORBITAL SANDER SL42AES

Orbital sander, electric



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.329 | SL42AES / 4.8 mm orbital diameter | 1 | 1 |
| 157.559 | RUPES Schleifplatte 70 x 400 | 1 | 1 |

### DESCRIPTION

- Electric orbital sander
- 4.8 mm orbital diameter
- Size: 70 × 400 mm
- Adjustable speed up to 7,000 rpm.
- Power: 550 Watt



## RUPES ORBITAL SANDER SLP41A

Orbital sander, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.337 | SLP41A / 4.8 mm orbital diameter | 1 | 1 |
| 157.559 | rubber plate 619.153MH / 70×400 mm | 1 | 1 |

### DESCRIPTION

- Pneumatic orbital sander
- 4.8 mm orbital diameter
- Size: 70 × 400 mm
- Adjustable speed up to 10,000 rpm.

## RUPES RANDOM ORBITAL SINGLE-HAND SANDER RA75

Random orbital sander, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.333 | RA75 / 3 mm orbital diameter | 1 | 1 |
| 147.663 | Rupes Pad Velcro 5/16'' – RA75 soft | 1 | 1 |

### DESCRIPTION

- Pneumatic random orbital single-hand sander
- 3 mm orbital diameter
- Ø Velcro® back pad: 75 mm
- Adjustable speed up to 11,000 rpm.
- Thread: 5/16"

## RUPES ORBITAL SANDER RE21ALN

Orbital sander, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.454 | RE21ALN / 3 mm orbital diameter | 1 | 1 |
| 157.558 | Sanding plate 988.001MH / 70×198 mm | 1 | 1 |

### DESCRIPTION

- Pneumatic orbital single-hand sander
- 3 mm orbital diameter
- Size: 70 × 198 mm
- Adjustable speed up to 11,000 rpm.

## FINISH SANDER RC 9332

Random orbital sander 75 mm, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.388 | Incl. back pad / 2.5 mm orbital diameter | 1 | 1 |

### DESCRIPTION

- Pneumatic random orbital single-hand sander
- 2.5 mm orbital diameter
- Adjustable speed up to 10,000 rpm
- Inner thread: 1/4"

## RUPES IBRID NANO

Battery operated mini sanding and polishing machine




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.318 | HR81M / STB Ibrid Nano short neck | 1 | 1 |
| 157.319 | HR81ML / STB Ibrid Nano long neck | 1 | 1 |
| 157.717 | Polish Pad 9.DA 40H / hard / blue | 6 | 6 |
| 157.718 | Polish Pad 9.DA 40M / fine / yellow | 6 | 6 |
| 157.784 | Back pad 995.001C / Velcro® daisy discs / 30 mm | 1 | 1 |
| 157.785 | Back pad 996.001C / Velcro® daisy discs / 50 mm | 1 | 1 |
| 157.786 | Back pad 997.001C / Self adhesive daisy discs / 30 mm | 1 | 1 |
| 157.787 | Rotation unit 562.390 | 1 | 1 |
| 157.788 | Orbital diameter unit / 3mm | 1 | 1 |
| 158.370 | Polish Pad 9.DA 40S / extrafine / white | 6 | 6 |

### DESCRIPTION

- Battery operated mini sanding machine
- Provided with: 12 mm orbital diameter unit and 50 mm Velcro® back pad
- Adjustable speed up to 5,000 rpm.
- Running time: Approx. 30 min
- Charging time: Approx. 20 min

## RUPES IBRID NANO Q-MAQ

Battery operated mini sanding and polishing machine




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.320 | MAQ HQM83 / STB / Ibrid Nano Q-MAG | 1 | 1 |
| 157.644 | Back pad / 75 mm | 1 | 1 |

### DESCRIPTION

- Battery operated random orbital sander
- 2 mm orbital diameter
- Ø Velcro® back pad: 75 mm
- Adjustable speed up to 5,000 rpm.
- Running time: Approx. 30 min
- Charging time: Approx. 20 min

For industrial and professional use only.



For industrial and professional use only.

## TAPE OFF TOOL

Axial sander




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 133.172 | 1 axial sander | 1 | 1 |

### DESCRIPTION

- Pneumatic axial grinder
- Retarded runout

### AREA OF APPLICATION

- Usable with Carsystem Tape Off Discs

### BENEFITS

- Reduced speed to avoid damaging the paint

**PUTTIES FOR ALL KIND OF SURFACES AND APPLICATIONS FOR A PROFESSIONAL REPAIR**

# PUTTIES

## CATEGORY

As one of the leading manufacturers of putties, we produce high-quality products to enable professional restoration and repair of bodywork components and vehicle surfaces in bodyshops and paint shops. Thanks to our versatile putties, which are produced in our headquarters with our own formulation, our brand has established itself on the market both nationally and internationally over the years. Our **CARSYSTEM** Multi, the polyester multi-purpose putty or the universal putty with multi-adhesion, as well as the Multi Green range are our most well-known putties. Whether glass fibre putty, fine putty, with or without styrene: **CARSYSTEM** has almost every possible version listed in its product range. Special putties, such as the Multi Changer, which cause a colour change during the curing phase, prove our constant introduction of innovative products for the automotive industry.







For industrial and professional use only.



# MULTI BLACK RAPID

NEW

## Multifunctional polyester putty

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.755 | 1.3 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Universal putty
- Colour: Black

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Multi adhesion
- No surface moisture after curing
- No control powder necessary due to the dark shade

### DRYING TIME

- Drying time: 10 min / 20 °C object temperature



SCAN ME

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## FLOW

Polyester light putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.013 | 1.0 kg tin incl. hardner | 1 | 6 |

### DESCRIPTION

- Universal putty
- Self-leveling, non-porous surface
- Colour: Yellow-green

### AREA OF APPLICATION

- For filling small to medium imperfections and scratches

### BENEFITS

- No surface moisture after curing
- Smooth, pore-free surface
- Easy sanding

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI GREEN PLUS 1.0 SUPER LIGHT

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.357 | 1.0 kg tin incl. hardener | 1 | 6 |
| 152.978 | 1.6 kg cartridge incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Ultra lightweight putty
- Colour: Green

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Completely dry surface after curing
- Improved sandability due to the latest filling agents
- Curing time: 12 min / 20 °C objecttemperature
- Multi adhesion

### DRYING TIME

- 12 min / 20 °C object temperature

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |



## MULTI GREEN

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.706 | 1.6 kg tin incl. hardener | 1 | 6 |
| 147.337 | 2.52 kg cartridge incl. hardener | 1 | 6 |
| 149.134 | 8.11 kg cartridge incl. hardener | 1 | 2 |

### DESCRIPTION

- Multifunctional polyester putty
- Universal putty
- Colour: Green

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Reduced surface moisture after curing
- Good balance between being semi-solid and creamy
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI GREEN RAPID

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.233 | 1.3 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifuncional polyester putty
- Universal putty
- Colour: Green

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Hardly surface moisture after curing
- Improved sandability due to the latest filling agents
- Multi adhesion

### DRYING TIME

- 10 min / 20 °C object temperature

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI GREEN SF

Multifuncional polyester putty styrene-free




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.543 | 1.75 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Styrene-free
- Colour: Green
- Styrene-free putty differs in the typical putty smell

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Styrene-free
- Very easy to apply due to its creamy consistency
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI GREEN CHANGER

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.622 | 1.6 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Universal putty
- Colour: Green

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Colour change during the curing time from green to yellow
- Reduced surface moisture after curing
- Good balance between being semi-solid and creamy
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## MULTI GREEN GLAS

Multifunctional fiberglass reinforced polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.707 | 1.65 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Glass fibre reinforced putty
- Colour: Green

### AREA OF APPLICATION

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

### BENEFITS

- Short glass fibres
- Multi adhesion
- Very precise application

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## MULTI GREEN GLAS LIGHT

Multifunctional fiberglass reinforced lightweight polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.116 | 1.3 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Glass fibre reinforced ultra lightweight putty
- Colour: green

### AREA OF APPLICATION

- For filling very deep imperfections, for repairing treated rust spots and GRP

### BENEFITS

- Short glass fibres
- Multi adhesion
- Very precise application
- Optimized sandability

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.857 | 1.0 kg tin incl. hardener | 1 | 6 |
| 127.977 | 2.0 kg tin incl. hardener | 1 | 6 |
| 134.155 | 1.5 kg cartridge incl. hardener | 1 | 8 |
| 132.214 | 2.9 kg cartridge incl. hardener | 1 | 6 |
| 128.145 | 9.7 kg cartridge incl. hardener | 2 | 2 |

### DESCRIPTION

- Multifunctional polyester putty
- Universal putty
- Colour: Beige

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Very easy to apply due to its creamy consistency
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI LIGHT

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.503 | 1.3 kg tin incl. hardener | 1 | 6 |
| 142.155 | 2.2 kg cartridge incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Ultra lightweight putty
- Colour: Light beige

### AREA OF APPLICATION

- For filling small to medium-sized imperfections, dents and scratches

### BENEFITS

- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.



## MULTI SILVER LIGHT

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.795 | 1.5 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Lightweight putty
- Colour: Silver

### AREA OF APPLICATION

- For filling small to medium-sized imperfections, dents and scratches

### BENEFITS

- Creates a visually good-looking transition zone due to its silver colour
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## MULTI PLUS

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.451 | 1.6 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Universal putty
- Colour: Light grey

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Good balance between being semi-solid and creamy
- Very easy to apply
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## MULTI SOFT

Multifuncional polyester putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.206 | 2.0 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Multifunctional polyester putty
- Fill and fine putty
- Colour: Light grey

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches

### BENEFITS

- Very easy to apply due to its creamy consistency
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## SOFT

Polyester – fill putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 127.972 | 1.8 kg tin incl. hardener | 1 | 6 |
| 132.116 | 2.6 kg cartridge incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Fill putty
- Colour: Beige

### AREA OF APPLICATION

- For filling medium-sized to deep imperfections, dents and scratches

### BENEFITS

- Easy to apply due to its creamy consistency

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |





## METALLIC

Polyester – fill putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.852 | 1.0 kg tin incl. hardener | 1 | 6 |
| 127.911 | 2.0 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Fill putty
- High density due to aluminum content
- Colour: Silver

### AREA OF APPLICATION

- For filling medium-sized to deep imperfections, dents and scratches

### BENEFITS

- Creates a visually good-looking transition zone due to its silver colour

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## ALU SPEZIAL

Polyester – hard putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.524 | 1.8 kg tin incl. hardener | 1 | 6 |
| 127.976 | 2.0 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Special polyester putty
- Hard putty
- Extremely high hardness range
- Colour: Light grey

### AREA OF APPLICATION

- For filling very deep imperfections
- Re-building of edges and bonded aluminum parts

### BENEFITS

- Replaces the tin application for aluminium
- No sagging of transition zones on bonded replacement parts

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## STEEL

Polyester – hard putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.587 | 0.9 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Special polyester putty
- Hard putty
- Extremely high hardness
- Colour: Silver

### AREA OF APPLICATION

- Replaces the tin application for welded steel panels
- For filling very deep imperfections
- Re-building of deformed edges

### BENEFITS

- Highly break resistant
- Fast drying

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## ELASTIC BEIGE

Polyester – fine putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.855 | 1.0 kg tin incl. hardener | 1 | 6 |
| 127.976 | 2.0 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Fine putty
- Colour: Beige

### AREA OF APPLICATION

- For filling small to medium-sized imperfections, dents and scratches

### BENEFITS

- Provides an extra fine surface almost free of pores
- Minimizes the sanding effort

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## ELASTIC WHITE

Polyester – fine putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.856 | 1.0 kg tin incl. hardener | 1 | 6 |
| 127.975 | 2.0 kg tin incl. hardener | 1 | 6 |
| 132.723 | 10.0 kg cartridge incl. hardener | 2 | 2 |

### DESCRIPTION

- Polyester putty
- Fine putty
- Colour: White

### AREA OF APPLICATION

- For filling small to medium-sized imperfections, dents and scratches

### BENEFITS

- Provides an extra fine surface almost free of pores
- Minimizes the sanding effort

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## ANTI RUST PUTTY

Anti rust putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.612 | 1.8 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Special polyester putty
- Anti rust putty
- Colour: Red brown

### AREA OF APPLICATION

- For filling small imperfections, dents and scratches
- To provide additional rust protection

### BENEFITS

- Additional anti rust layer

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## LIQUID PUTTY

Polyester – liquid putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.496 | 1.04 kg bottle incl. hardener | 1 | 8 |

### DESCRIPTION

- Polyester putty
- Liquid putty
- Colour: Beige

### AREA OF APPLICATION

- For filling small imperfections, dents and scratches

### BENEFITS

- Provides a perfect result almost free of pores
- Self-levelling

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.



## GLAS

Polyester – glass fiber reinforced putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.854 | 1.0 kg tin incl. hardener | 1 | 6 |
| 127.974 | 1.8 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Glas fibre reinforced putty
- Colour: Green

### AREA OF APPLICATION

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

### BENEFITS

- Extra long glass fibres

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## GLAS WHITE

Polyester – glass fibre reinforced putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.808 | 1.8 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Glass fibre putty
- Colour: White

### AREA OF APPLICATION

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

### BENEFITS

- Extra long glass fibres

### APPLICATION ADVICE

White hardener prevents any colour change of the putty surfaces.

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## FASER

Polyester – glass fibre reinforced putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.443 | 1.4 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Special glass fibre putty
- Less fibres and more resin compared to normal glass fibre putties
- Colour: Brown transparent

### AREA OF APPLICATION

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

### BENEFITS

- Extra long glass fibres

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## MULTI SUPER FLEX

Polyester putty highly elastic




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.284 | 1.8 kg tin incl. hardener | 1 | 10 |

### DESCRIPTION

- Multifunctional polyester putty
- High elastic putty
- Colour: Dark grey

### AREA OF APPLICATION

- For filling small imperfections, dents and scratches on very flexible plastic parts

### BENEFITS

- No loss of adhesion in the transition zone
- No adhesion primer necessary
- Multi adhesion
- Sanding control due to dark colour

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

For industrial and professional use only.



## PLASTIC PRO

Polyester – plastic putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.613 | 1.0 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Plastic contour putty
- Colour: Black

### AREA OF APPLICATION

- For filling small imperfections, dents and scratches on plastic surfaces

### BENEFITS

- Outstanding adhesion on plastic surfaces
- No loss of adhesion in the transition zone
- No adhesion primer necessary
- Sanding control due to black colour

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ |

For industrial and professional use only.

## FLEX

Polyester – plastic putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 134.796 | 1.0 kg incl. hardener | 1 | 12 |

### DESCRIPTION

- Polyester putty
- Plastic contour putty
- Colour: Dark grey

### AREA OF APPLICATION

- For filling small scratches and imperfections on plastic surfaces

### BENEFITS

- Outstanding adhesion an plastic surfaces
- No loss of adhesion in the transition zone
- No plastic primer necessary

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ |

## CARBO PUTTY

Polyester – carbon putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.018 | 0.5 kg tin incl. hardener | 1 | 12 |

### DESCRIPTION

- Special polyester putty
- Fill and fine putty
- Colour: Transparent

### AREA OF APPLICATION

- Base layer on horizontal CRP and wood surfaces to fill pores and imperfections
- Transparent base on carbon parts
- Can be applied directly to CRP

### BENEFITS

- Provides a surface almost free of pores
- Self-levelling
- Minimizes the sanding time
- No sagging on carbon parts
- Improves the top coat quality

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## CARBO SPRAY

Polyester – sprayable putty for carbon parts




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.019 | 0.820 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Special polyester putty
- Sprayable putty
- Colour: Transparent

### AREA OF APPLICATION

- For filling small to deep imperfections, dents and scratches
- Transparent base on carbon parts
- Can be applied directly to CRP

### BENEFITS

- Very high layer thickness possible
- Very even application by spray gun
- No sagging on carbon parts
- Improves the top coat quality

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.




## CARBO SPRAY THINNER

Carbo spray thinner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.234 | 1.0 l tin | 1 | 6 |

### DESCRIPTION

- Thinner

### AREA OF APPLICATION

- Thinner for Carbo Spray

## SPRAY

Polyester – sprayable putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 127.978 | 1.5 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Sprayable putty
- Colour: Grey

### AREA OF APPLICATION

- For filling deep imperfections, dents and scratches
- Usable on passenger cars, trucks or in exhibition stand construction

### BENEFITS

- Very high layer thickness possible
- Very even application by spray gun

### APPLICATION ADVICE

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## SPRAY PLUS

Polyester – sprayable putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 135.597 | 1.5 kg tin incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester putty
- Sprayable filler
- Colour: Light grey

### AREA OF APPLICATION

- For filling deep imperfections, dents and scratches
- Passenger cars or trucks and exhibition stand construction
- Additionally usable on CRP panels

### BENEFITS

- Very high layer thickness possible
- Very even application by spray gun
- Optmized drying time and surface structure

### APPLICATION ADVICE

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## SPRAY THINNER

Thinner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 124.315 | 1.0 l tin | 1 | 6 |

### DESCRIPTION

- Thinner for CS Spray Filler and CS Spray Plus

### AREA OF APPLICATION

- Thinner for polyester spray putty

## BPO HARDENER

Hardener




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 132.413 | Red / 40 g | 1 | 1 |
| 127.038 | Blue / 40 g | 1 | 10 |

### DESCRIPTION

- BPO hardener paste
- Colour: Red (Standard hardener)
- Colour: Blue (Summer hardener)

### AREA OF APPLICATION

- Hardener for polyester putty




For industrial and professional use only.

## 1K NC FILLER

Nitrocellulose – filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.139 | Tube / 200 g | 1 | 24 |

### DESCRIPTION

- Nitrocellulose filler
- 1K Filler for application with a spatula
- Colour: Light grey

### AREA OF APPLICATION

- For filling smallest imperfections, pinholes and stone chip damages

### BENEFITS

- Fast drying
- Multi adhesion

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |

## POLYESTER REPAIR SET

Polyester repair set




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.054 | Set / 800 g | 1 | 12 |

### DESCRIPTION

- Polyester repair set
- Polyester resin, hardener and glass fibre mat
- Dimension of the glas fabric:
- 126.047 = 250 g Set: 12.5 × 50 cm
- 126.054 = 800 g Set: 125 × 40 cm

### AREA OF APPLICATION

- For repairing small holes in the surface
- For repairing GRP parts

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## POLYESTER REPAIR RESIN

Polyester repair resin




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.050 | 1,000 g incl. hardener | 1 | 6 |

### DESCRIPTION

- Polyester repair resin

### AREA OF APPLICATION

- For processing of glass fibre fabric and mats, for repairing small holes in the surface
- For repairing GRP parts

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

For industrial and professional use only.

## GLASS FIBRE REINFORCED PUTTY

Polyester – glass fibre reinforced putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 124.036 | 250 g tin incl. hardener | 1 | 12 |

### DESCRIPTION

- Polyester putty
- Glass fibre reinforced putty
- Colour: Green

### AREA OF APPLICATION

- For filling very deep imperfections
- Repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

### BENEFITS

- Extra long glass fibres

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## FILL PUTTY

Polyester – fill putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 124.550 | 250 g tin incl. hardener | 1 | 12 |
| 124.552 | 1,000 g tin incl. hardener | 1 | 12 |

### DESCRIPTION

- Polyester putty
- Fill putty
- Colour: Grey

### AREA OF APPLICATION

- For filling deep to very deep imperfections, dents and scratches

### BENEFITS

- Very high filling performance

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |

## FINE PUTTY

Polyester – fine putty




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 124.124 | 250 g tin incl. hardener | 1 | 12 |
| 124.126 | 1,000 g tin incl. hardener | 1 | 12 |

### DESCRIPTION

- Polyester putty
- Fine putty
- Colour: White

### AREA OF APPLICATION

- For filling small to medium-sized imperfections, dents and scratches

### BENEFITS

- Provides a very fine surface almost free of pores
- Minimizes the sanding time

| STEEL | ALUMINIUM | GALVANIZED STEEL | GRP | PLASTICS | 2 COMP. POLY-ESTER PUTTY | WOOD |
|---|---|---|---|---|---|---|
| ✓ | ✗ | ✗ | ✓ | ✗ | ✓ | ✓ |



## GLASS FIBRE MAT

300 g per m²



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.423 | 0.5 m² | 1 | 12 |
| 125.424 | 1.0 m² | 1 | 12 |

### DESCRIPTION

- Glass fibre mat
- Weight: 300 g/m²

### AREA OF APPLICATION

- For covering small holes in the surface on non-bearing parts

### BENEFITS

- Stabilizes parts against tensile strength

### APPLICATION ADVICE

Usable with polyester repair resin.

## ALUMINIUM MESH

Aluminium repair mesh



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.041 | 25 x 20 cm | 1 | 200 |

### DESCRIPTION

- Aluminium repair mesh

### AREA OF APPLICATION

- Modelizing of forms before using glass fibre mats or glass fibre fabric

### BENEFITS

- Simple handling of edged work pieces

### APPLICATION ADVICE

Can be adapted to the form of the work piece by bending.Usable with glass fibre putties.

## PUTTY KNIFE

Steel spreader



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.435 | 60 mm | 1 | 12 |
| 137.436 | 80 mm | 1 | 12 |
| 137.437 | 100 mm | 1 | 12 |

### DESCRIPTION

- Steel spreader with a plastic handle

### AREA OF APPLICATION

- For removing and mixing putties

### BENEFITS

- Solvent resistant plastic handle

## JAPANESE PUTTY KNIFE

Japanese steel blades



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.356 | 1 Set | 1 | 100 |

### DESCRIPTION

- Set of steel spreaders
- 4 steel spreaders (5, 8, 10 and 12 cm)

### AREA OF APPLICATION

- For mixing and applying putty manually

### BENEFITS

- Solvent resistant

For industrial and professional use only.

## RUBBER SPREADER SET

Rubber spreader




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.448 | Set of 3 spatulas (65, 100 and 125 mm) | 1 | 50 |

### DESCRIPTION

- Soft rubber spatula
- Set of 3 spatulas: 65, 100 and 125 mm

### AREA OF APPLICATION

- For applying putty to extreme shapes
- Particularly suitable for curved surfaces, holes and cracks
- For mixing and applying putty

### BENEFITS

- 3 sizes per set guarantee the right spatula size for every task
- Clean, straight edges for precise work
- Stiff and yet flexible

## BLACKY

Rubber spreader



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.433 | 100 × 60 mm | 10 | 10 |
| 137.434 | 80 × 50 mm | 10 | 10 |

### DESCRIPTION

- Rubber plastic spreader

### AREA OF APPLICATION

- For mixing and applying putty manually

### BENEFITS

- Solvent resistant
- Extremely flexible



## EASY CLEAN BOX

Putty spreader cleaning box



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.206 | Spreader cleaning device | 1 | 2 |
| 159.363 | Replacement fleece 3pcs | 1 | 100 |

### DESCRIPTION

- Putty spreader cleaning box for reusable putty spreaders
- Solvent resistant

### AREA OF APPLICATION

- For fast and easy cleaning of steel, plastic or rubber putty spreaders

### BENEFITS

- Closed container for reduced smell
- Significantly cleaner worSPlace

SCAN ME

## PLASTIC SPREADER

Plastic spreader



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.961 | 115 × 77 mm | 100 | 100 |

### DESCRIPTION

- Plastic spreader

### AREA OF APPLICATION

- For mixing and applying putty manually

### BENEFITS

- Solvent resistant
- Flexible

## PUTTY MIX BOARD

Putty mix board



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.206 | 100 tear-offs / 26 × 22 cm | 1 | 10 |

### DESCRIPTION

- Putty mix board
- 100 tear-offs

### AREA OF APPLICATION

- Supporting plate to mix putty and hardener

### BENEFITS

- Big area for putty mixing
- Easy disposal of the used tear-off
- No cleaning or sanding necessary

For industrial and professional use only.

## SPEEDMIXER 3 KG

Putty dispenser – electrical



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.017 | Speedmixer 3 kg | 1 | 1 |
| 146.427 | Mixing nozzles green (pack of 100 pcs.) | 1 | 5 |
| 152.088 | Multi Green slow – Speedmixer / green / 2,523 kg cartridge inkl. hardener | 6 | 6 |

### DESCRIPTION

- Electrically operated putty dispenser
- For 3 kg putty cartridges

### AREA OF APPLICATION

- Automatic dosing and mixing of filler and hardener

### BENEFITS

- Perfect ratio between putty and hardener
- Avoids wrong dosage
- Bubble-free putty
- No hand mixing necessary

### APPLICATION ADVICE

Manual pre-injection of hardener.

## SPEEDMIXER 10 KG

Putty dispenser – electro-pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.347 | Speedmixer 10 kg | 1 | 1 |
| 146.955 | Mixing nozzles / yellow / XL (pack of 100 pcs.) | 1 | 5 |
| 143.810 | Elastic weiss / very slow / 10 kg cartridge incl. hardener | 2 | 2 |
| 144.131 | Multi / beige / 9,63 kg cartridge incl. hardener | 2 | 2 |
| 143.205 | Multi / slow / beige / 9,61 kg cartridge incl. hardener | 2 | 2 |
| 145.419 | Multi / very slow / beige / 9,61 kg cartridge incl. hardener | 2 | 2 |
| 146.808 | Multi Light / slow / beige / 6,94 kg cartridge incl. hardener | 2 | 2 |
| 147.451 | Multi Light / super slow / beige / 6,94 kg cartridge incl. hardener | 2 | 2 |
| 149.614 | Multi Green / slow / green / 8,18 kg cartridge incl. hardener | 2 | 2 |

### DESCRIPTION

- Electro-pneumatic putty dispenser
- For 10 kg putty cartridges

### AREA OF APPLICATION

- Automatic dosing and mixing of putty + hardener

### BENEFITS

- Perfect ratio between putty and hardener
- Avoids wrong dosage
- Bubble-free putty
- No hand mixing necessary

### APPLICATION ADVICE

Fully automatic dispensing of the putty.



## PUTTY DISPENSER

Putty dispenser – pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 123.859 | A 3C | 1 | 1 |
| 123.840 | A 10C | 1 | 1 |
| 136.912 | Sealing ring / white plastic sealing plug | 1 | 1 |

### DESCRIPTION

- Pneumatic putty dispenser
- For 3 kg and 10 kg cartridges
- Wall mount

### AREA OF APPLICATION

- Pneumatic dispensing of putty and hardener

### BENEFITS

- Perfect ratio between putty and hardener
- Avoids wrong dosage

### APPLICATION ADVICE

Wall mount only.

## DUALMATIC

Putty dispenser – manual



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 123.892 | For 3 kg cartidges | 1 | 1 |
| 126.854 | Handle for Dualmatic | 1 | 1 |
| 126.861 | Cut off with handle | 1 | 1 |

### DESCRIPTION

- Dispenser for 3 kg putty cartridges
- Manual withdrawal
- Wallmounting is recommended

### AREA OF APPLICATION

- Mobile putty dispenser, also suitable for table or wall mount

### BENEFITS

- Perfect ratio between putty and hardener
- Avoids wrong dosage

### APPLICATION ADVICE

Amount of hardener adjustable (summer / winter).



**TAPES AND MASKING FILMS FOR PRECISION IN PAINTING AND REPAIRS**

# MASKING

## CATEGORY

The **CARSYSTEM** masking range protects your workspace fast and effective against wetness, dirt, and paint mist. We offer a huge product line of high-quality paint protection film, functional tapes and practical accessories for e.g. rims, vehicle sensors and steering wheels. Our functional paint stands and wall holder provide a proper storage in your paint shop. The **CARSYSTEM** masking films, packed as rolls, can be cut as needed without material surplus. Discover the **CARSYSTEM** Foam Tape T-Soft which is outstanding to seal up splits and protect your car interior reliably against paint mist.

## MASTER TAPE II

Masking tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.201 | 15 mm × 50 m | 60 | 60 |
| 140.202 | 19 mm × 50 m | 48 | 48 |
| 140.203 | 25 mm × 50 m | 36 | 36 |
| 140.204 | 30 mm × 50 m | 28 | 28 |
| 140.205 | 38 mm × 50 m | 24 | 24 |
| 140.206 | 50 mm × 50 m | 24 | 24 |

### DESCRIPTION

- High performance masking tape
- Highly solvent resistant
- Waterproof
- Temperature resistant up to 120 °C / 1 h

### AREA OF APPLICATION

- All masking work especially at high temperatures

### BENEFITS

- Very strong initial tack

## TOP TAPE

Masking tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.262 | 15 mm × 50 m | 60 | 60 |
| 139.263 | 19 mm × 50 m | 48 | 48 |
| 139.264 | 25 mm × 50 m | 36 | 36 |
| 139.265 | 30 mm × 50 m | 32 | 32 |
| 139.266 | 38 mm × 50 m | 24 | 24 |
| 139.267 | 50 mm × 50 m | 24 | 24 |

### DESCRIPTION

- Standard masking tape
- Temperature resistant up to 80 °C / 1 h

### AREA OF APPLICATION

- Suitable for all standard masking work

## MASTER TAPE GREEN

Masking tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.221 | 19 mm × 50 m | 48 | 48 |
| 149.222 | 25 mm × 50 m | 36 | 36 |
| 149.223 | 30 mm × 50 m | 32 | 32 |
| 149.225 | 38 mm × 50 m | 24 | 24 |
| 149.226 | 50 mm × 50 m | 24 | 24 |

### DESCRIPTION

- Allround masking tape
- Solvent resistant
- Waterproof
- Temperature resistant up to 110 °C / 1 h

### AREA OF APPLICATION

- Suitable for all standard masking work

### BENEFITS

- Strong initial tack

## SLIM TAPE

Special masking tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 133.827 | 18 mm × 50 m | 10 | 160 |

### DESCRIPTION

- Special masking tape
- Special paper base
- Extremely thin
- Waterproof
- Temperature resistant up to 100 °C / 1 h

### AREA OF APPLICATION

- Suitable for difficult surfaces e.g. rubber, plastics, door openers and chromed parts
- "Last tape" before painting

### BENEFITS

- High curve stability
- Perfect cutting ability

For industrial and professional use only.



## SLIM TAPE GREEN

Special masking tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.081 | 18 mm × 18 m | 8 | 200 |

### DESCRIPTION

- Special masking tape
- Special paper base
- Extremely thin
- Waterproof
- Temperature resistant up to 100 °C / 1 h

### AREA OF APPLICATION

- Suitable for difficult surfaces e.g. rubber, plastics, door openers and chromed parts
- "Last tape" before painting

### BENEFITS

- Small and handy, fits into every pocket
- High curve stability
- Perfect cutting ability

## FINE LINE TAPE BLUE

Fine line tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.083 | 3 mm × 33 m | 1 | 220 |
| 140.084 | 6 mm × 33 m | 1 | 128 |
| 140.085 | 9 mm × 33 m | 1 | 96 |
| 140.086 | 12 mm × 33 m | 1 | 24 |
| 140.087 | 19 mm × 33 m | 1 | 20 |

### DESCRIPTION

- Fine line tape
- PVC base
- Waterproof
- Temperature resistant up to 155 °C / 1 h
- High solvent resistance

### AREA OF APPLICATION

- Multi colour and design painting
- Masking of curves and long, straight lines
- Suitable for masking work on rubber and plastic surfaces

### BENEFITS

- Highly flexible
- Does not stretch when unrolled




For industrial and professional use only.

## WR-LIFTING TAPE PREMIUM

Masking tape with plastic edge – perforated



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.734 | Perforated / 9 + 11 mm × 10 m | 1 | 24 |

### DESCRIPTION

- Special tape
- Perforated maskig tape with a plastic edge
- Waterproof
- Temperature resistant up to 120°C/1 h
- We recommend to tear off from plastic to tape

### AREA OF APPLICATION

- For masking window sealings, lip seals, front and back lights and indicators

### BENEFITS

- 2 in 1, lenght wise perforated masking tape with a plastic edge in 9 mm and 11 mm
- Tape and plastic edge are perforated for easy tear off
- Paint edge disappears under the sealing

## WR-LIFTING TAPE

Masking tape with plastic edge

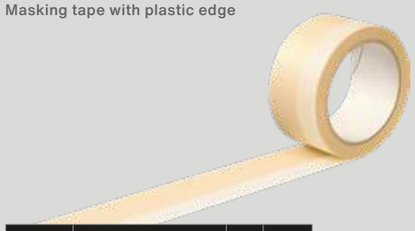

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.720 | 9 mm × 10 m | 1 | 24 |

### DESCRIPTION

- Special tape
- Masking tape with a plastic edge
- Waterproof
- Temperature resistant up to 120 °C / 1h

### AREA OF APPLICATION

- For masking window sealings, lip seals, front and back lights and indicators

### BENEFITS

- Paint edge disappears under the sealing

## SILVER TAPE

Fabric tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 135.715 | 50 mm × 50 m | 1 | 18 |

### DESCRIPTION

- Fabric tape
- Waterproof
- Temperature resistant up to 80 °C / 3 h

### AREA OF APPLICATION

- Usable for different masking work
- Sanding edge protection
- Support tape for glued parts

### BENEFITS

- High adhesion on a multitude of surfaces

## BLACK TAPE

Fabric tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 147.753 | 50 mm × 50 m | 1 | 18 |

### DESCRIPTION

- Fabric tape
- Waterproof
- Temperature resistant up to 80 °C / 3h

### AREA OF APPLICATION

- Usable for different masking work
- Sanding edge protection
- Support tape for glued parts

### BENEFITS

- High adhesion on a multitude of surfaces

For industrial and professional use only.



## MASKING PAPER MASTER II

Masking paper – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.878 | 20 cm × 450 m | 1 | 150 |
| 159.880 | 60 cm × 450 m | 1 | 60 |
| 159.882 | 90 cm × 450 m | 1 | 37 |
| 159.883 | 120 cm × 450 m | 1 | 30 |
| 159.884 | 150 cm × 450 m | 1 | 30 |

### DESCRIPTION

- Special masking paper
- Robust
- Solvent resistant
- Free of PFAS (Barrier through mechanical processing of the paper fiber)
- 40 g/m²

### AREA OF APPLICATION

- Masking paper for all masking work

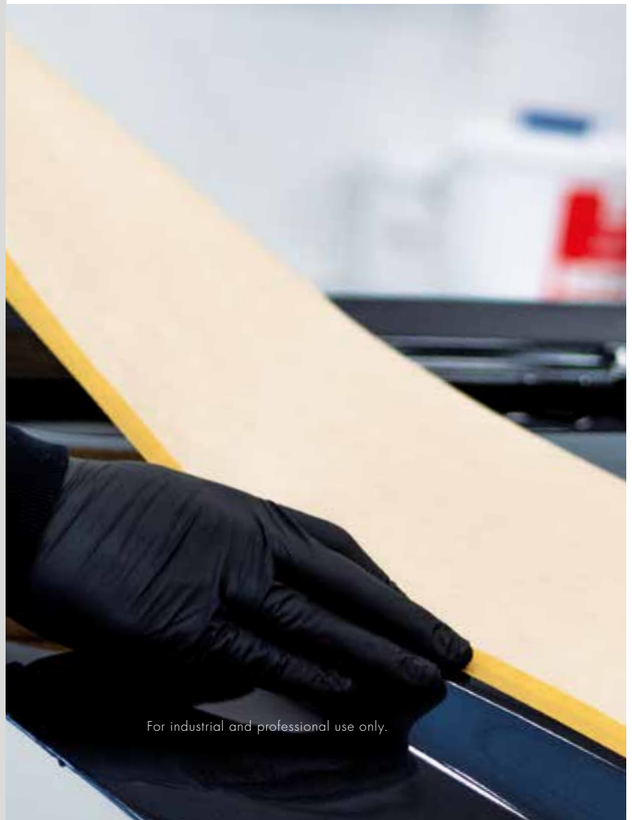

For industrial and professional use only.

## MASKING PAPER TOP II

Masking paper – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.528 | 20 cm × 450 m | 1 | 150 |
| 155.529 | 60 cm × 450 m | 1 | 60 |
| 155.530 | 90 cm × 450 m | 1 | 37 |
| 155.531 | 120 cm × 450 m | 1 | 30 |
| 155.532 | 150 cm × 450 m | 1 | 30 |

### DESCRIPTION

- Standard masking paper
- One side sealed
- Tight
- 40 g/m²

### AREA OF APPLICATION

- Standard masking paper for all masking work

## WM TAPE

Adhesive Tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.794 | 50 mm × 66 m | 6 | 36 |

### DESCRIPTION

- Packaging tape

### AREA OF APPLICATION

- For sealing packages

## MMIR-MASK AQUA TEC

Masking film – Roll




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.038 | 400 cm × 150 m (middle folding) | 1 | 24 |
| 152.055 | 500 cm × 120 m (middle folding) | 1 | 24 |

### DESCRIPTION

- Paint adhesive
- Slightly static
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Vehicles with residual moisture

## MMIR-MASK LIGHT GREEN

Masking film – Roll




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.453 | 400 cm × 150 m (middle folding) | 1 | 28 |
| 150.454 | 400 cm × 300 m (middle folding) | 1 | 28 |
| 150.455 | 500 cm × 120 m (middle folding) | 1 | 28 |
| 149.587 | 600 cm × 100 m (middle folding) | 1 | 28 |

### DESCRIPTION

- Standard masking film
- Paint adhesive
- Slightly static
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Standard masking film for all masking work

## MASKING FILM YELLOW

Masking film – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.572 | 400 cm × 200 m (middle folding) | 1 | 28 |
| 155.573 | 500 cm × 120 m (middle folding) | 1 | 28 |
| 156.948 | 600 cm × 100 m (middle folding) | 1 | 28 |

### DESCRIPTION

- Premium masking film
- Extremely thick
- Paint adhesive
- Strongly static
- Correction of masking tape possible
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Premium masking film for all masking work

### BENEFITS

- Vehicles with residual moisture
- Extremely tear-proof
- Perfect cutting ability
- Avoids water marks from residual moisture
- High static
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free
- The strong static avoids overspray from crawling under the film

### APPLICATION ADVICE

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.

## MASKING FILM BLUE

Masking film – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.570 | 400 cm × 150 m (middle folding) | 1 | 28 |
| 155.569 | 400 cm × 300 m (middle folding) | 1 | 18 |
| 155.571 | 500 cm × 120 m (middle folding) | 1 | 28 |

### DESCRIPTION

- Paint adhesive
- Strongly static
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Vehicles with residual moisture

### BENEFITS

- High static
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free
- The strong static avoids overspray from crawling under the film
- Avoids water marks from residual moisture

### APPLICATION ADVICE

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.

## MASKING FILM GREEN

Masking film – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.565 | 400 cm × 300 m (middle folding) | 1 | 28 |
| 155.567 | 500 cm × 120 m (middle folding) | 1 | 45 |
| 155.568 | 600 cm × 100 m (middle folding) | 1 | 28 |

### DESCRIPTION

- Standard masking film
- Paint adhesive
- Strongly static
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Standard masking film for all masking work

### BENEFITS

- High static
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free
- The strong static avoids overspray from crawling under the film

### APPLICATION ADVICE

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.



## EASY MASK

Masking film – Roll



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.199 | 380 cm × 200 m (middle folding) | 1 | 40 |
| 151.181 | 400 cm × 150 m (middle folding) | 1 | 45 |

### DESCRIPTION

- Masking film
- Slightly static
- Heat resistant up to 110 °C
- Dust protected in a cardboard box

### AREA OF APPLICATION

- Standard masking film for all masking work

## AUTO MASK

Handy masking film incl. tape



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.476 | Refill-roll 0.55 × 33 m | 1 | 40 |
| 125.517 | Refill-roll 1.80 × 33 m | 1 | 20 |
| 133.060 | Refill-roll 2.70 × 20 m | 1 | 20 |

### DESCRIPTION

- Masking film with integrated adhesive tape
- Paint adhesive
- Static

### AREA OF APPLICATION

- For masking windows, bumpers and sills
- Manual use

## PROTECTIVE FILM SPF

Surface Protection Film – 60 cm × 20 m



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.145 | 60 cm × 20 m | 1 | 1 |

### DESCRIPTION

- Surface protection film
- Self-adhesive
- Structured surface has an anti-slip effect

### AREA OF APPLICATION

- Protective film for areas, which need protection against dirt, moisture, paint, oils
- Floors or surfaces in paint mixing rooms
- For smooth and rough surfaces such as wood, concrete
- Aircraft wings during repair and maintenance

### BENEFITS

- Resistant to chemicals and solvents
- Recyclable
- Can be easily applied and removed without leaving any residue

### APPLICATION ADVICE

Only for indoor use (no weather resistance). The protective film SPF is not antistatic. We recommend checking the suitability very carefully when using in ATEX areas.

## MMIR KNIFE PREMIUM

Cutter tool




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.513 | Film knife | 2 | 2 |

### DESCRIPTION

- Cutter tool for plastic film
- Coated blade

### AREA OF APPLICATION

- For cutting plastic film

### BENEFITS

- Injury protected due to an imbedded blade

For industrial and professional use only.



## FOAM TAPE T-SOFT

Foam tape




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.974 | 25 m | 1 | 1 |

### DESCRIPTION

- Special foam tape
- Silicone-free glue
- Temperature resistant up to 80 °C / 1h

### AREA OF APPLICATION

- For closing gaps on doors, bonnets and trunk lids
- Protects inner areas from overspray

### BENEFITS

- Avoids hard paint edges
- Easy placement
- Perfect edge finish
- No glue residues

## FOAM TAPE

Foam tape




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.861 | 13 mm × 50 m | 1 | 140 |
| 148.862 | 19 mm × 35 m | 1 | 84 |

### DESCRIPTION

- Foam tape
- Silicone-free glue
- Temperature resistant up to 80 °C / 1h

### AREA OF APPLICATION

- For closing gaps on doors, bonnets and trunk lids
- Protects inner areas from overspray

### BENEFITS

- Avoids hard paint edges

For industrial and professional use only.

# PDC EASY PAINT

NEW

Painting assistant for parking sensors

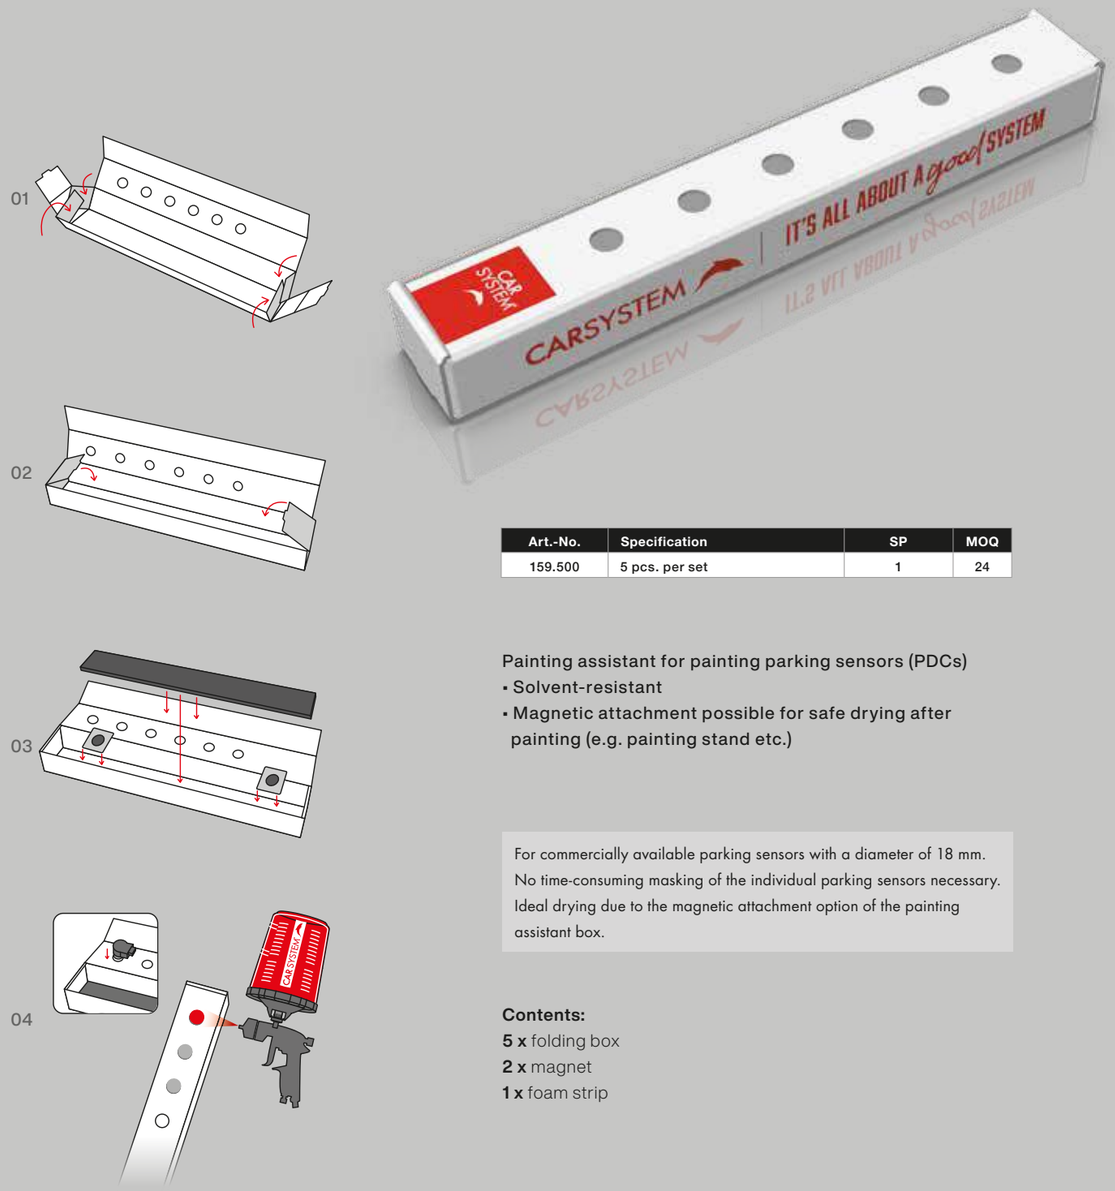


| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.500 | 5 pcs. per set | 1 | 24 |

Painting assistant for painting parking sensors (PDCs)
- Solvent-resistant
- Magnetic attachment possible for safe drying after painting (e.g. painting stand etc.)

For commercially available parking sensors with a diameter of 18 mm. No time-consuming masking of the individual parking sensors necessary. Ideal drying due to the magnetic attachment option of the painting assistant box.

**Contents:**
**5 x** folding box
**2 x** magnet
**1 x** foam strip

For industrial and professional use only.



## TEC LINE STICK

Sensor pad




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.554 | 150 pcs. / box / 18 mm | 1 | 50 |

### DESCRIPTION
- Covers for parking sensors
- PET plastic
- Temperature resistant: -40 °C up to +180 °C
- Solvent resistant

### AREA OF APPLICATION
- For covering parking sensors or key holes
- Protection against sanding, painting and polishing

### BENEFITS
- Time saving
- No dismantling of parking sensors

### APPLICATION ADVICE
We recommend to remove the sensor cover while the paint is still liquid to avoid paint edges.

## ALL IN ONE COVERS

NEW

Interior protection 5-in-1




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.480 | 880 x 1500 mm / set | 1 | 1 |

### DESCRIPTION
- Vehicle interior protection set with 5 components for: seat, footwell, steering wheel, gear shifter and handbrake
- 200 sets on a roll

### AREA OF APPLICATION
- Covering the vehicle interior during repair and service work
- For protection against water, dirt, dust, oil and paint

For industrial and professional use only.

## WHEEL COVER

Cover hood



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.483 | 17 inches / 1 pack = 4 pcs. | 4 | 56 |
| 158.211 | 20-21 inches / 1 pack = 4 pcs. | 4 | 56 |

### DESCRIPTION
- Cover hood for car wheels
- Paint and heat protection
- Aluminum sealed fabric
- Dust and waterproof

### AREA OF APPLICATION
- Fast masking of wheels before painting
- Protects car wheels from dust and overspray

## LIQUID MASKING

Liquid masking film




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.718 | 19 L | 1 | 1 |

### DESCRIPTION
- Liquid masking film
- Detergent included
- Water-based
- Water soluble and solvent resistant
- Colour: Transparent – red

### AREA OF APPLICATION
- Protects the vehicle from overspray, polishing splashes, dust and slight mechanical damage

### BENEFITS
- More environmentally friendly than a plastic film
- Dries glass clear – car can be moved safely in the work shop

### APPLICATION ADVICE
We recommend the application with a new filler gun.
Nozzle: 1.9 – 2.2 mm.

**CLEAR COATS, FILLERS AND 1K SPRAYS FOR THE CAR PAINTER**



# PAINTING

## CATEGORY

Professional painting guaranteed – **CARSYSTEM** has built up a large range of high-quality clear coats, fillers and thinners over the years. The associated complementary products, such as our popular CPS system, simplify painting and lead to perfect results on the vehicle. From spot repair to complete painting, whether matt or glossy - **CARSYSTEM** offers a wide range of products for all areas of application in bodyshops. Discover our versatile product range, including 2K clear coat with highest UV protection suitable for carbon fiber, the **CARSYSTEM** UV or acrylic fillers, as well as thinners in a wide variety of versions. Convince yourself of the high quality and an optimal result on the vehicle.

## 2K CLEAR VOC SPEED PLUS

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.563 | A+B comp. / 1.5 L | 1 | 12 |
| 151.899 | A comp. / 5.0 L | 1 | 4 |
| 151.901 | Hardener / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- Premium quality
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle

### BENEFITS

- Very fast drying
- Brilliant gloss
- Very good surface quality
- Very user friendly
- Extremely wear resistant

### APPLICATION ADVICE

We recommend a fast and efficient way of working for complete paint jobs.

### DRYING TIME

- 15 min / 60 °C object temperature

## 2K CARBO CLEAR PLUS

2K Carbo clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.217 | A-comp. / 1 L | 1 | 12 |
| 153.218 | Hardener / 0.5 L | 1 | 12 |
| 153.207 | A-comp. / 5 L | 1 | 4 |
| 153.208 | Hardener / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- Premium clear coat for carbon surfaces
- VOC compliant

### AREA OF APPLICATION

- Special clear coat for carbon parts

### BENEFITS

- Very fast drying time
- Brilliant gloss
- Very good surface quality
- Very user friendly
- Extremely wear resistant
- High UV protection

### DRYING TIME

- 15 min. / 60 °C object temperature

For industrial and professional use only.



## CC.21 X-PRESS FIVE

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.251 | A+B comp. / 1.5 L | 1 | 12 |
| 158.249 | A comp. / 5 L | 1 | 4 |
| 158.250 | Hardener / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- Premium quality
- VOC compliant

### AREA OF APPLICATION

- For small to medium paint work

### BENEFITS

- Extremely fast drying time
- Excellent gloss and flow properties
- Very user-friendly
- Very good surface quality

### DRYING TIME

- 15 – 20 min / 40 °C object temperature

## CC.20 X-PERT

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.423 | A + B Comp. / 1.5 L | 1 | 12 |
| 157.450 | A comp. / 5 L | 1 | 4 |
| 157.451 | Hardener / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- All-purpose clear coat
- VOC conform

### AREA OF APPLICATION

- All common paint work in a paint shop from individual parts up to full vehicle paintings

### BENEFITS

- Fast drying time
- Very high final hardness
- Brilliant gloss

### APPLICATION ADVICE

We recommend a fast and efficient way of working for complete paint jobs.

### DRYING TIME

- 20 – 25 min. / 40 °C object temperature

For industrial and professional use only.

## 2K CLEAR VOC PREMIUM

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.714 | A-comp. / 5 L | 1 | 4 |
| 147.019 | Hardener standard / 2.5 L | 1 | 4 |
| 147.862 | Hardener fast / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- Universal clear coat
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle

### BENEFITS

- Good surface quality
- Long pot life

### DRYING TIME

- 30 min / 60 °C object temperature (hardener standard)

## 2K CLEAR VOC 420

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.138 | A-comp. / 1.0 L | 1 | 12 |
| 144.140 | Hardener 420 standard / 0.5 L | 1 | 12 |
| 144.139 | Hardener 421 fast / 0.5 L | 1 | 12 |
| 142.953 | A-comp. / 5.0 L | 1 | 4 |
| 144.107 | Hardener 420 standard / 2.5 L | 1 | 4 |
| 144.108 | Hardener 421 fast / 2.5 L | 1 | 4 |

### DESCRIPTION

- 2K Acrylic clear coat
- Universal clear coat
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle

### BENEFITS

- High final surface hardness

### DRYING TIME

- 30 min / 60 °C object temperature (hardener standard)

For industrial and professional use only.



## 2K CLEAR VOC CC.19 AS

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.931 | A+B comp. / 1.5 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic clear coat
- Industrial clear coat
- VOC compliant

### AREA OF APPLICATION

- Small parts and spot repair

### BENEFITS

- Especially high initial hardness
- High UV, chemical and mechanical resistance

### DRYING TIME

- 25 min. / 60 °C object temperature

## 2K CLEAR VOC HS-SR

2K Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.909 | A-comp. / 5.0 L | 1 | 4 |
| 151.910 | Hardener standard / 2.5 L | 1 | 4 |
| 151.911 | Hardener fast / 2.5 L | 1 | 4 |
| 153.223 | A+B comp. / hardener slow / 1.5 L | 1 | 12 |
| 153.774 | A+B comp. / hardener standard / 1.5 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic clear coat
- Universal industrial clear coat
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle

### BENEFITS

- High scratch resistance
- High initial hardness directly after curing

### DRYING TIME

- 30 min / 60 °C object temperature (hardener standard)

For industrial and professional use only.

## 2K CLEAR VOC MATT

2K Clear coat matt




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.983 | A-comp. matt / 1.0 L | 1 | 12 |
| 148.984 | Hardener fast / 0.5 L | 1 | 12 |
| 148.985 | Hardener standard / 0.5 L | 1 | 12 |
| 148.986 | A-comp. silk-matt / 1.0 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic clear coat matt
- Matt level: Matt – 148.983
- Matt level: Silk-matt – 148.986
- VOC compliant

### DRYING TIME

- 30 min / 60 °C object temperature (hardener standard)

## ACTIVATOR

Reaction accelerator




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 147.695 | 1 L | 1 | 12 |

### DESCRIPTION

- Reaction accelerator additive

### AREA OF APPLICATION

- Additive to speed up the drying process of Carsystem fillers and clear coats
- Max. addition in fillers: 10 %
- Max. addition in clear coats: 2 %

### BENEFITS

- Accelerates the drying time about 15 %

### APPLICATION ADVICE

Only usable with standard or slow hardeners to avoid adhesion problems or matting.

For industrial and professional use only.



## ACRYL THINNER

Acrylic thinner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.479 | Standard / 5 L | 1 | 4 |
| 150.331 | Standard / 1 L | 1 | 12 |
| 152.456 | Fast / 5 L | 1 | 4 |
| 153.171 | Slow / 5 L | 1 | 4 |

### DESCRIPTION

- Acrylic thinner
- Colour: Transparent

### AREA OF APPLICATION

- For all Carsystem fillers and clear coats

## HIGH GLOSS ADDITIVE

High gloss additive




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.788 | 1 L | 1 | 12 |

### DESCRIPTION

- High gloss additive
- Colour: Transparent

### AREA OF APPLICATION

- Additive for all Carsystem clear coats

### BENEFITS

- Improves gloss and surface quality

### APPLICATION ADVICE

Mix High Gloss Additive and A-component first before adding the hardener to avoid adhesion problems.

For industrial and professional use only.

## SPOTBLENDER

Blending thinner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.989 | 1 L | 1 | 12 |

### DESCRIPTION

- Blending thinner

### AREA OF APPLICATION

- For homogeneous transition zones between old and new paint for 1K and 2K clear coats and 2K top coats

## EF.21 EP-FILLER

2K Hybrid filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.248 | A+B comp. / 1.5 L | 1 | 12 |

### DESCRIPTION

- 2K Hybrid filler – acrylic / epoxy
- Universal filler
- Colour: yellowish (approx. RAL 7032)
- VOC compliant

### AREA OF APPLICATION

- All common filling works from spot repair to full vehicle
- Adhesion to steel, aluminium, KTL, old and new coatings on and under polyester puttys

### BENEFITS

- Settable as wet on wet
- High corrosion resistance
- Excellent sandability
- Chromate free

### DRYING TIME

- Standard: 30 min / 60 °C objecttemperature
- Wet on wet: 30 min / 20 °C objecttemperature

For industrial and professional use only.



## AF.21 X-PERT

2K Acrylic filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.216 | A-Comp. / white / 3.6 L | 1 | 4 |
| 158.218 | A-comp. / grey / 3.6 L | 1 | 4 |
| 158.219 | A-comp. / black / 3.6 L | 1 | 4 |
| 158.220 | Hardener / 0.9 L | 1 | 4 |
| 158.221 | Thinner standard / 1 L | 1 | 12 |
| 159.237 | Thinner Multi Wet-On-Wet / 1 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic filler
- Universal filler
- VOC compliant

### AREA OF APPLICATION

- All common filling works from spot repair to full vehicle
- Very good adhesion to steel, aluminium, e-coat primers, plastic (wet on wet application) and polyester fillers
- Painting new parts with e-coat primers
- Anti corrosions protection

### BENEFITS

- Settable as wet-on-wet
- Excellent sandability
- Layer thickness can be flexibly adjusted (from low to very high layer thickness)
- Application on e-coat primers without sanding
- Also adheres to plastic in wet-on-wet setting

### DRYING TIME

- Standard: 25 min. / 60 °C object temperature
- Wet-on-wet: 25 min. / 20 °C object temperature

For industrial and professional use only.

## AF.21 1K FILLER

1K Hybrid filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.244 | Grey / 1 L | 1 | 12 |
| 158.245 | Thinner / 1 L | 1 | 12 |

### DESCRIPTION

- 1K Hybrid filler – acrylic / epoxy
- VOC compliant
- Colour: Grey

### AREA OF APPLICATION

- For isolating putty spots
- Painting of new parts
- Filling of plastic parts with direct adhesion without applying a primer first (except PE & PP)

### BENEFITS

- 100% rust protection
- Very user friendly
- Very good sandability

### DRYING TIME

- 10 min / 60 °C object temperature

## 2K FILLER AIR PLUS

2K Acrylic filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.580 | A + B comp. / grey / 1.25 L | 1 | 12 |
| 152.416 | A-comp. / white / 3.6 L | 1 | 4 |
| 152.417 | A-comp. / grey / 3.6 L | 1 | 4 |
| 152.418 | A-comp. / black / 3.6 L | 1 | 4 |
| 152.419 | Hardener / 0.9 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic filler
- VOC complaint

### AREA OF APPLICATION

- Perfectly suitable for small parts, spot repair and air drying
- All common paint works from spot repair to full vehicle

### BENEFITS

- Fast air-drying
- Very good sandability

### DRYING TIME

- 15 – 20 min / 60 °C object temperature

## 2K VOC FILLER 540

2K Acrylic filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.541 | A+B comp. / hardener very fast / white / 1.25 L | 1 | 12 |
| 147.432 | A+B comp. / hardener standard / grey / 1.25 L | 1 | 12 |
| 144.539 | A+B comp. / hardener very fast / grey / 1.25 L | 1 | 12 |
| 144.540 | A+B comp. / hardener very fast / black / 1.25 L | 1 | 12 |
| 144.354 | A-comp. / white / 3.6 L | 1 | 4 |
| 144.026 | A-comp. / grey / 3.6 L | 1 | 4 |
| 144.353 | A-comp. / black / 3.6 L | 1 | 4 |
| 144.977 | Hardener VOC 541 / standard / 0.9 L | 1 | 12 |
| 144.027 | Hadener very fast / 0.9 L | 1 | 12 |
| 153.493 | Hardener VOC 541 CT / 0.9 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic filler
- Universal filler
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle

### BENEFITS

- High filling power
- Variable due to three different hardeners
- Winter hardener CT available for low temperatures (cold temperature)

### DRYING TIME

- 30 – 45 min / 60 °C object temperature (hardener standard)

For industrial and professional use only.



## 2K FILLER VARIO PLUS

2K Acrylic filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.058 | A+B comp. / light grey / 1.2 L | 1 | 12 |
| 152.057 | A-comp. / light grey / 3.5 L | 1 | 4 |
| 147.682 | Hardener / 0.7 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic filler
- High build filler
- Colour: Light grey
- VOC compliant

### AREA OF APPLICATION

- All common paint works from spot repair to full vehicle
- Also usable as a high build filler
- Filler: 60 to 180 µ
- High build filler: 85 to 255 µ

### BENEFITS

- Very high filling power
- The filler can be variably adapted by adding up to 30 % thinner

### DRYING TIME

- Normal layer: 30 – 35 min / 60 °C object temperature
- High build: 45 min / 60 °C object temperature

## 2K FILLER WET ON WET PLUS

2K Acryl filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.455 | A+B-comp. / grey / 1.05 L | 1 | 12 |
| 153.456 | A-comp. / grey / 3.6 L | 1 | 4 |
| 153.457 | Hardener / 0.6 L | 1 | 12 |

### DESCRIPTION

- 2K Acrylic filler
- Wet on wet filler
- VOC complaint

### AREA OF APPLICATION

- Painting new parts

### BENEFITS

- Application on e-coat primers without sanding
- Rust protection on bare metal parts

### DRYING TIME

- Wet on wet: 15 – 20 min / 60 °C object temperature
- Sanding filler: 20 min / 60 °C object temperature

For industrial and professional use only.

## TINTING PASTE FILLER

Tinting paste




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.505 | Red / 0.5 L | 1 | 30 |
| 148.504 | Black / 0.5 L | 1 | 30 |

### DESCRIPTION

- Tinting paste

### AREA OF APPLICATION

- Tinting paste for Carsystem acrylic fillers
- Max. addition: 1 – 5 %

### BENEFITS

- For matching the filler to the basecoat shade

### APPLICATION ADVICE

Mix tinting paste and A-component first before adding the hardener to avoid adhesion problems.

## HPP PRIMER

1K Plastic primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.706 | White / 1 kg | 1 | 6 |
| 154.707 | Grey / 1 kg | 1 | 12 |
| 154.708 | Black / 1 kg | 1 | 6 |
| 154.712 | Thinner / 1 L | 1 | 12 |

### DESCRIPTION

- 1K Plastic primer
- Special primer
- Wet on wet primer for plastic parts

### AREA OF APPLICATION

- Prior to painting of solvent resistant uncoated plastic parts (e.g. PP, PVC, EPP, PP-EPDM)

### BENEFITS

- Extremely time saving
- No pretreatment of the plastic surfaces necessary
- Cleaning with alcohol-based plastic cleaner is mandatory

### APPLICATION ADVICE

We recommend for the cleaning of plastic parts the Carsystem ISO-VE 7030 cleaner. Not suitable for PE/PC.

### DRYING TIME

- Wet on wet 15 min / 20 °C object temperature

For industrial and professional use only.



## UV CLEAR

Transparent UV Clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.528 | 100 ml | 1 | 20 |

### DESCRIPTION

- UV clear coat
- Clear coat for dip application
- VOC compliant
- Colour: Transparent

### AREA OF APPLICATION

- Filling of pinholes, small scratches and stone chips in the clear coat

### BENEFITS

- Extremely time saving
- Perfect solution for spot repairs

### DRYING TIME

- 30 – 60 sec. (CS UV lamps)

## UV FILLER SPRAY

UV Filler Spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.169 | 400 ML | 1 | 6 |

### DESCRIPTION

- UV Filler Spray
- Colour: Grey-beige
- Can be used as an insulating filler

### AREA OF APPLICATION

- Spot repair
- Small parts

### BENEFITS

- High filling capacity
- 100 % rust protection
- Extremely time saving

### APPLICATION ADVICE

On plastic substrates, the Carsystem plastic primer must be applied first. On steel, aluminium and galvanized steel the Carsystem Etch Primer or 1K Epoxy Primer must be applied first.

### DRYING TIME

- ready for assembly after 2 – 4 minutes (UV-A lamp)

For industrial and professional use only.




## 2K HIGH-SPEED KLARLACK

2K Spot-repair clear coat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.421 | 400 ml | 1 | 6 |

### DESCRIPTION

- 2K Acrylic clear coat spray
- Colour: Transparent

### AREA OF APPLICATION

- For painting small parts
- Especially suitable for spot repair

### BENEFITS

- No spray gun application necessary
- Very fine atomisation
- Long pot life (approx. 24 h after activation)

For industrial and professional use only.

## CLEAR COAT SPRAY

Paint spray – transparent




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.025 | 400 ml | 1 | 12 |

### DESCRIPTION

- 1K Clear coat spray
- Colour: Transparent-glossy

### AREA OF APPLICATION

- Spot repair

### BENEFITS

- Fast drying and polishable

For industrial and professional use only.

## SPOTBLENDER SPRAY

Blending thinner spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.987 | 400 ml | 1 | 12 |

### DESCRIPTION

- Blending thinner spray
- Colour: Transparent

### AREA OF APPLICATION

- For homogeneous transition zones in the blending area of 1K and 2K clear coats as well as top coats

### BENEFITS

- No spray gun application necessary

## RALLYE-SPRAY PREMIUM

Paint spray – black glossy




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.219 | 500 ml | 1 | 6 |

### DESCRIPTION

- Acrylic paint spray
- Colour: Black glossy

### AREA OF APPLICATION

- Repair of imperfections in the paint
- Paint application on new parts

### BENEFITS

- High opacity
- Fast drying
- Polishable

## RALLYE-SPRAY PREMIUM

Paint spray – black matt




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.218 | 500 ml | 1 | 6 |

### DESCRIPTION

- Acrylic paint spray
- Colour: Black matt

### AREA OF APPLICATION

- Repair of imperfections in the paint
- Paint application on new parts

### BENEFITS

- High opacity
- Fast drying

For industrial and professional use only.



## RALLYE-SPRAY GLOSS

Paint spray – gloss




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.026 | Black glossy / 400 ml | 1 | 12 |
| 126.053 | White glossy / 400 ml | 1 | 12 |

### DESCRIPTION

- Acrylic paint spray

### AREA OF APPLICATION

- Repair of imperfections in the paint

### BENEFITS

- Fast drying
- Polishable

## RALLYE-SPRAY MATT

Paint spray – matt




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.027 | 400 ml | 1 | 12 |

### DESCRIPTION

- Acrylic paint spray
- Colour: Black matt

### AREA OF APPLICATION

- Repair of imperfections in the paint

### BENEFITS

- Fast drying

For industrial and professional use only.

## THERMO-SPRAY

Paint spray – heat resistant




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.086 | Black / 400 ml | 1 | 12 |
| 126.087 | Silver / 400 ml | 1 | 12 |

### DESCRIPTION

- Silicone resin based paint spray
- Temperature resistant up to 650 °C

### AREA OF APPLICATION

- Protects parts in the engine compartment and exhaust pipes

### BENEFITS

- Extremely high temperature resistance

## SILVER WHEEL

Silver wheel spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.021 | 400 ml | 1 | 12 |

### DESCRIPTION

- Acrylic paint spray
- Colour: Silver

### AREA OF APPLICATION

- For painting steel rims

### BENEFITS

- Abrasion resistant
- Weather resistant

For industrial and professional use only.



## 2K EPOXY FILL PRIMER

2K Spot-repair epoxy primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.158 | Beige / 400 ml | 1 | 6 |

### DESCRIPTION

- 2K Epoxy filler spray
- Colour: Beige

### AREA OF APPLICATION

- For primering small parts
- Especially suitable for spot repair

### BENEFITS

- Variable spray nozzle
- Perfect adhesion and rust protection properties
- Free of isocyanate

## PRIMER SURFACING SPRAY

Primer spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.024 | 400 ml | 1 | 12 |

### DESCRIPTION

- Primer spray
- Nitro-combi-based
- Colour: Grey

### AREA OF APPLICATION

- Primer for all paint works

### BENEFITS

- Good rust protection properties
- Weather resistant

For industrial and professional use only.

## PRIMER SPRAY

Primer spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.949 | Red brown / 400 ml | 1 | 12 |
| 132.907 | Grey / 400 ml | 1 | 12 |

### DESCRIPTION

- Primer spray
- Alkyd resin-based

### AREA OF APPLICATION

- Primer for all paint works

### BENEFITS

- Very good rust protection properties

## ETCH PRIMER

Primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.028 | 400 ml | 1 | 6 |

### DESCRIPTION

- Rust protection spray
- Colour: Grey

### AREA OF APPLICATION

- Specific for repairing of original primers on aluminum car bodies
- Isolating of sanded trough spots
- Adhesion promoter on all steel, zinc, aluminum substrates for spot and partial paintings

### BENEFITS

- Easy to use
- Fast flash off and drying time

For industrial and professional use only.



## ZINC SPRAY

Rust protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.030 | 400 ml | 1 | 12 |

### DESCRIPTION

- Rust protection spray
- Colour: Grey
- Temperature resistant up to 490 °C (acc. DIN50976, 53167, 50021, 53151)

### AREA OF APPLICATION

- Rust protection for the body interior in spot welding
- Cold galvanizing of metal surfaces

## SPRAY FILLER SPRAY

Spray filler




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.580 | 400 ml | 1 | 12 |

### DESCRIPTION

- Spray putty aerosol
- Acryl-based
- Colour: Grey

### AREA OF APPLICATION

- Levelling of small imperfections and isolating polyester putty layers

### BENEFITS

- Outstanding high filling power
- Short drying time
- Quickly sandable

For industrial and professional use only.

## 1K EPOXY PRIMER

1K Epoxy primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.958 | 400 ml | 1 | 12 |

### DESCRIPTION

- 1K Epoxy primer spray
- Colour: Grey

### AREA OF APPLICATION

- Spot and partial paintings
- Isolating of sanded through spots
- Overpaintable with water and solvent based paints

### BENEFITS

- Highest possible rust protection
- Perfect isolation against moisture
- UV resistant

### APPLICATION ADVICE

Damaged areas on metal substrates must be thoroughly cleaned with silicone remover. When used as a primer, we recommend to apply a 2K filler on top. When used in several layers or in high layer thickness, overpainting can be done wet on wet with water or solvent based paints.

## 1K EASY PRIMER

1K Filling primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.537 | White / 400 ml | 1 | 12 |
| 151.538 | Grey / 400 ml | 1 | 12 |
| 151.539 | Black / 400 ml | 1 | 12 |

### DESCRIPTION

- 1K Primer spray

### AREA OF APPLICATION

- Spot and partial paintings
- Isolating of sanded through spots
- Overpaintable with water and solvent based paints
- Overpaintable wet on wet

### BENEFITS

- Rust protection primer and filler in one step
- Weldable
- Free of chromate



## 1K EASY FILLER

1K High build primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.522 | Lightgrey / 400 ml | 1 | 12 |
| 151.523 | Black / 400 ml | 1 | 12 |
| 159.584 | White / 400 ml | 1 | 12 |

### DESCRIPTION

- 1K Acrylic filler spray
- High build primer

### AREA OF APPLICATION

- Spot and partial paintings
- Filling small spots prior to painting
- Overpaintable with water and solvent based paints

### BENEFITS

- High filling and opacity power
- Time saving compared to the use of a spray gun
- Suitable for wet and dry sanding
- Free of chromate

## PLASTIC PRIMER

Plastic primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.986 | Transparent / 400 ml | 1 | 12 |

### DESCRIPTION

- Plastic primer spray

### AREA OF APPLICATION

- For all car and truck plastic parts inside and outside
- Suitable for spot repairs

### APPLICATION ADVICE

Can be used on the following plastics: PP, PP/EPDM, ABS, SAN, PUR-RIM, R-TRU, PPO, PBT, PUR flexible foam, UP-GF plastics. Not suitable for PE and PC.

## BUMPER STRUCTURANT SPRAY

Bumper structurant spray black




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.982 | 400 ml | 1 | 12 |

### DESCRIPTION

- Acrylic structurant paint spray
- Colour: Black

### AREA OF APPLICATION

- Repairs and renewals of old, faded out or damaged plastic parts
- Re-forms the structure close to the original

### BENEFITS

- No plastic primer needed
- No spray gun application necessary

## BUMPER PAINT SPRAY

Bumper spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.820 | Grey / 400 ml | 1 | 6 |
| 142.821 | Black / 400 ml | 1 | 6 |

### DESCRIPTION

- Acrylic paint spray

### AREA OF APPLICATION

- Repairs and renewals of old, faded out or damaged plastic parts

### BENEFITS

- No plastic primer needed
- No spray gun application necessary

### APPLICATION ADVICE

Usable on PP, PP/EPDM, ABS.

For industrial and professional use only.



## PREFILL-SPRAY

Aerosol tin – fillable




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.686 | Without pin / 275 ml | 1 | 12 |

### DESCRIPTION

- Prefill paint spray
- Filled with 275 ml propellant, solvent and additives
- To be filled with 100 ml of paint

### AREA OF APPLICATION

- Fillable with solvent based paint

### BENEFITS

- Replaces a spray gun in spot repairs

### APPLICATION ADVICE

Filling machine required

## PREFILL-SPRAY WATER

Aerosol tin – fillable




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.608 | Without pin / 300 ml | 1 | 12 |

### DESCRIPTION

- Prefill paint spray
- Filled with 300 ml propellant, solvent and additives
- To be filled with 100 ml of paint

### AREA OF APPLICATION

- Fillable with water based paint

### BENEFITS

- Replaces a spray gun in spot repairs

### APPLICATION ADVICE

Filling machine required

For industrial and professional use only.

## BUMPER PAINT

Structurant paint for plastics




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 147.447 | 1.0 L | 1 | 12 |

### DESCRIPTION

- Acrylic structurant paint
- Colour: Black

### AREA OF APPLICATION

- Repairs and renewals of old, faded out or damaged plastic parts
- Re-forms the structure close to the original

### BENEFITS

- No plastic primer needed
- Can beapplied directly to the plastic without prior priming

## SPRAY HEAD

Replacement spray head red



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.840 | Spray nozzle spare part / red | 1 | 100 |

### DESCRIPTION

- Replacement spray head red
- Suitable for: Prefill Spray and Prefill Spray Water

## REPLACEMENT SPRAY HEAD

Replacement Spray Head adjustable



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.793 | Replacement Spray Head adjustable | 1 | 300 |

### DESCRIPTION

- Replacement spray head adjustable
- Suitable for:
- 1K Epoxy Primer
- 1K Easy Primer
- 1K Easy Filler



# PAINT SYSTEM CPS 2.0

NEW

Disposable paint cup system with ring lock










SCAN ME

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.311 | Set / 400 ml / 125 µm / 50 pcs. | 1 | 1 |
| 159.312 | Set / 600 ml / 125 ml / 50 pcs. | 1 | 1 |
| 159.643 | Set / 400 ml / 190µm / 50 pcs | 1 | 1 |
| 159.644 | Set / 600 ml / 190µm / 50 pcs | 1 | 1 |
| 159.671 | Set / 800 ml / 190 µm / 50 pcs | 1 | 1 |
| 158.064 | Adapter A5 – Anest Iwata W400 | 1 | 1 |
| 158.063 | Adapter A7 – Devilbiss | 1 | 1 |
| 158.718 | Adapter A17 – Walcom EGO/SLIM | 1 | 1 |
| 158.717 | Adapter A19 – Walcom GEO/HTE | 1 | 1 |
| 158.066 | Adapter A82 – SATA QCC | 1 | 1 |
| 158.065 | Adapter A87 – Anest Iwata WS400 + LS400 | 1 | 1 |
| 159.315 | Lids / 400 ml / 125 µm / 25 pcs. | 1 | 1 |
| 159.318 | Lids / 600 – 800 ml / 125 µm / 25 pcs. | 1 | 1 |
| 159.321 | Lids / 600 – 800 ml / 190 µm / 25 pcs. | 1 | 1 |
| 159.322 | Hard cup with ring / 400 ml | 1 | 5 |
| 159.324 | Hard cup with ring / 600 ml | 1 | 5 |
| 159.325 | Hard cup with ring / 800 ml | 1 | 5 |

### DESCRIPTION

- Disposable paint cup system with ring lock

### AREA OF APPLICATION

- For processing water-based and solvent-based paint system

### BENEFITS

- Upside down painting is possible
- Clean work due to mixing in the painting cup
- Storage of residual material is possible
- CPS adapters can be used

### APPLICATION ADVICE

We recommend to empty the paint channel before removing the cup: Hold the gun upside down, close the nozzle and pull the trigger briefly. The paint channel is now completely empty and the cup can be removed without dripping.

# MULTI MIX CUP 2.0

Disposable Mixing Cup

NEW




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.710 | cup / 385 ml | 200 | 200 |
| 157.711 | cup / 750 ml | 200 | 200 |
| 157.712 | cup / 1,400 ml | 200 | 200 |
| 157.713 | cup / 2,300 ml | 100 | 100 |

### DESCRIPTION

- Disposable Mixing Cup
- Silicone-free
- Scale range: From 1 : 1 to 10 : 1

### AREA OF APPLICATION

- For clean and accurate mixinng of all fillers, base coats, clear coats etc.

### BENEFITS

- Solvent-resistant
- Special printing methode for precise mixing ratios
- High transparency for optimal reading of mixing ratios

### APPLICATION ADVICE

Use only the scale of the mixing cup and not additionally the scale of a meauring stick. Cups are conic so there could be a difference.







For industrial and professional use only.



## MULTI-MIX LIDS

Disposable lids



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.549 | Lid / 385 ml | 200 | 200 |
| 140.550 | Lid / 750 ml | 200 | 200 |
| 140.551 | Lid / 1400 ml | 200 | 200 |
| 140.552 | Lid / 2300 ml | 200 | 200 |

### DESCRIPTION

- Lids for disposable Multi-Mix Cups

### AREA OF APPLICATION

- For sealing the Carsystem Multi-Mix Cups 2.0
- For storing residual material

## DISPENSER MULTI-MIX

Wall bracket for Multi-Mix Cups



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.664 | 0.385 L | 1 | 1 |
| 137.665 | 0.75 L | 1 | 1 |
| 137.666 | 1.4 L | 1 | 1 |
| 137.667 | 2.3 L | 1 | 1 |

### DESCRIPTION

- Dispenser for Multi-Mix Cups 2.0

### AREA OF APPLICATION

- Storage for Multi Mix Cups 2.0

### BENEFITS

- Space-saving storage
- Protection against contamination from the environment

## MULTI STRAIN

Paint strainer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.957 | Blue / 125 µ | 125 | 1000 |
| 146.958 | Yellow / 190 µ | 125 | 1000 |

### DESCRIPTION

- Disposable paint strainer
- Paper funnel with precise nylon-based filter
- Dust free

### AREA OF APPLICATION

- Filtration of all common painting materials

## DISPENSER FOR PAINT STRAINERS

Dispenser




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.960 | Dispenser | 1 | 1 |

### DESCRIPTION

- Dispenser for paint strainers
  Space for 150 paint strainers

### AREA OF APPLICATION

- For paint strainers

For industrial and professional use only.

## PAINT STRAINER

Paint strainer

NEW




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.430 | Blue / 125 µ | 250 | 1000 |
| 158.431 | Yellow / 190 µ | 250 | 1000 |

### DESCRIPTION

- Disposable paint strainer
- Paper funnel with precise nylonbased filter

### AREA OF APPLICATION

- Filtration of all common painting materials

### BENEFITS

- Dispenser box
- Reduces the risk of soiling due to external influences
- Safe and clean storage system directly at the worSPlace

## CAN SCRAPER

Plastic mixing stick

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.672 | Set of 5 can scraper | 1 | 100 |

### DESCRIPTION

- Plastic mixing stick
- Solvent resistant
- Length: 31 cm

### AREA OF APPLICATION

- For easy stiring and mixing of paint materials
- Residual emptying of 1 litre and 3.6 litre containers

### BENEFITS

- Reduction of paint waste








## PLASTIC CAN EMPTY

Paint tins



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.957 | 100 pcs. per carton / 0.5 L | 100 | 100 |
| 144.958 | 100 pcs. per carton / 1.0 L | 100 | 100 |
| 145.784 | 100 pcs. per carton / 1.8 L | 100 | 100 |

### DESCRIPTION

- Plastic paint tin
- Solvent resistant
- Tacky labels included

### AREA OF APPLICATION

- Stock of solvent and water based paint
- Long stock life due to the airtight closing lid

### BENEFITS

- Hard and very stable plastic tin
- Airtight lid prevents content from drying out

## MULTI-MIX BUCKET

Paint mixing bucket



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.649 | 36 pcs. per carton / 5.5 L | 1 | 1 |
| 145.315 | Lid / 5.5 L | 1 | 1 |

### DESCRIPTION

- Disposable paint mixing bucket with a handle

### AREA OF APPLICATION

- For mixing bigger quantities of paint material

## PG - FG FINE FILTER

Fine filter



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.680 | Bag with 10 pcs. | 10 | 10 |

### DESCRIPTION

- Fine filter

### AREA OF APPLICATION

- Paint filters for use in SATA gravity flow cup

For industrial and professional use only.

## SPRAY OUT CARDS METAL

Colour match card




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.758 | 200 pcs. per box / white | 1 | 5 |
| 153.759 | 200 pcs. per box / dark grey | 1 | 5 |

### DESCRIPTION

- Colour match cards metal

### AREA OF APPLICATION

- Colour matching

## COLOR MATCH CARD PAPER

Colour match card



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.109 | 250 pcs. per box / 70 × 179 mm | 1 | 24 |

### DESCRIPTION

- Colour matching card
- Paper based-kit with 250 pcs. incl. holder

### AREA OF APPLICATION

- Colour matching
- Disposable cards

### APPLICATION ADVICE

Not suitable for water-based paint. Control of opacity.

## TOUCH UP

Paint bottle – fillable 50ml




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.769 | Transparent / 50 ml × 25 pcs. | 1 | 20 |

### DESCRIPTION

- Plastic based paint bottle with a brush
- Including mixing ball made of glass

### AREA OF APPLICATION

- Can be filled with paint
- Repairing of stone chips and scratches in the surface

### BENEFITS

- Unbreakable

## TOUCH UP

Paint bottle – fillable 20ml




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.764 | Transparent / 20 ml × 100 pcs. | 1 | 8 |

### DESCRIPTION

- Plastic based paint bottle with a brush
- Including mixing ball made of stainless steel and brush

### AREA OF APPLICATION

- Can be filled with paint
- Repairing of stone chips and scratches in the surface

### BENEFITS

- Unbreakable



## MICRO TIP

Repair tip



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.976 | Box with 100 pcs. | 1 | 1 |

### DESCRIPTION

- Micro repair sticks with a micro fibre head

### AREA OF APPLICATION

- For filling stone chips, silicone funnels and scratches in the varnish

### APPLICATION ADVICE

Perfectly suitable with the UV Clear.

## MIXING STICK BLACK

Plastic mixing stick




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.752 | 23 × 1.8 cm | 100 | 100 |

### DESCRIPTION

- Plastic mixing stick
- Solvent resistant

### AREA OF APPLICATION

- For easy stirring and mixing of paint materials
- Nicely flexible

## DUST NEEDLE

Dust needle



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.971 | Set | 1 | 50 |
| 140.972 | Needles in blister / 10 pcs. | 10 | 5000 |

### DESCRIPTION

- Dust needle
- Content: 10 pcs.
- Inclusive holder

### AREA OF APPLICATION

- For removing particles or lints from resh painted surfaces

## BRUSH SET

Set of brushes



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.970 | Set | 1 | 10 |

### DESCRIPTION

- Set of small brushes
- Content: 3 sizes / 12 pcs. per size
- No. 4 / No. 6/No. 8

### AREA OF APPLICATION

- For repairing imperfections, stone chips etc.

**CAR POLISHES AND SEALANTS FOR THE PERFECT FINISH IN THE BODYSHOP**



# FINISH

## CATEGORY

From silicone-free cutting compounds and finish polishs to water-based high gloss finish sealers, waxes and electric polishing machines: your bodyshop is ideally equipped with the high-quality polishing products from **CARSYSTEM**. We recommend our polishing pads for high-quality paint preparation and optimal processing of sanding polishes. Our polishing pads are available in a wide range of designs and qualities. Carsystem's different polishing systems are perfectly coordinated and are suitable for removing sanded imperfections and deep scratches on fresh or hardened top coats, as well as for the safe removal of fine scratches and holograms. With our large selection of absorbent and lint-free microfibre cloths, you have the optimal cloth for every step of the work. Polishing machines from RUPES complement our product portfolio and ensure the perfect finish in combination with our polishes, pads and matching finish back pads.

## POLISH C-05 CUT

High performance cutting compunds




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.345 | 1 kg | 1 | 6 |

### DESCRIPTION

- High performance cutting compounds
- Water-based
- Free of silicones
- Colour: Green

### AREA OF APPLICATION

- Extremely fast removal of defects on fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

### BENEFITS

- Extremely high cutting performance
- Good deep shine

### APPLICATION ADVICE

We recommend using the Carsystem Polish Foam Green and using the Carsystem C-30 subsequently on dark paints.

## POLISH C-07 CUT

High performance cutting compound




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.445 | 1 kg | 1 | 6 |

### DESCRIPTION

- High-performance cutting compound
- Water-based
- Free of silicones
- Colour: Yellow

### AREA OF APPLICATION

- Very fast removal of defects on fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

### BENEFITS

- Very high cutting performance
- Very good deep shine

### APPLICATION ADVICE

We recommend using the Polish C-07 Cut in combination with the CS Polish Foam Yellow and for dark colours using the polish Carsystem Polish C-30.

For industrial and professional use only.



## POLISH C-10 STRONG

High performance cutting compound




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.634 | 1 kg | 1 | 6 |

### DESCRIPTION

- High performance cutting compound
- Water-based
- Free of silicones
- Colour: White

### AREA OF APPLICATION

- Fast removal of imperfections in fresh and completely hardened top coats
- Especially developed for fresh and used paint surfaces

### BENEFITS

- High cutting performance
- Extremely good deep shine
- Polishing on a low temperature level

### APPLICATION ADVICE

We recommend using the Carsystem Finish Quadra Pad C10and for dark colours using the polish Carsystem Polish C-30.

## POLISH C-30 FINISH

Anti hologram polish




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.636 | 1 kg | 1 | 6 |

### DESCRIPTION

- Anti hologram polish
- Water-based
- Free of silicone
- Colour: Grey

### AREA OF APPLICATION

- Removal of finest scratches, swirl marks and holograms on dark paints
- Perfect as the last finishing step

### BENEFITS

- Very effective removal of holograms without streaks
- Perfect deep shine
- Low dusting
- Good material displacement

### APPLICATION ADVICE

We recommend to use it with Carsystem Finish Foam White AH, Finish Sandwich Pad C-30 or Finish Foam Black AH.

For industrial and professional use only.

## C-WAX C-80

High gloss wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.243 | 500 g | 1 | 10 |

### DESCRIPTION

- Water-based high gloss finish sealer
- Free of silicones

### AREA OF APPLICATION

- Sealing of painted surfaces
- Protects the paint from weathering, fingerprints and slight mechanical damage
- Perfectly suitable as assembly protection in industry or car dealerships
- Can be applied by hand or machine

### BENEFITS

- Very good resistance to alkaline cleaners and environmental influences
- Extremely smooth surface
- Long-lasting protecion
- Brilliant deep shine
- Very quick and easy to use

### APPLICATION ADVICE

We recommend using the Carsystem Wax Puck.

## REFINISH 1

Cutting compound




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 132.437 | 880 ml | 1 | 12 |

### DESCRIPTION

- Cutting compound
- Free of silicones

### AREA OF APPLICATION

- Removal of scratches, dust inclusions and orange peel from fresh and old paints
- Especially suitable for faded and old paint surfaces

## NANO CARNAUBA WAX

High gloss wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.945 | 1.0 l | 1 | 6 |

### DESCRIPTION

- High gloss wax with nano technology
- Water-based
- Free of silicones
- Colour: Yellow

### AREA OF APPLICATION

- Sealing of paint surfaces
- Protects the paint from weathering

### BENEFITS

- Dirt repellent
- Provides a deep, mirror-like shine

### APPLICATION ADVICE

We recommend the application with the Carsystem Wax Puck.

## DISPENSER BOTTLE INCL. CAP

Dispenser bottle




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.575 | Dispenser bottle incl. cap | 1 | 1 |

### DESCRIPTION

- Dispenser bottle incl. cap for polishes
- 250 ml

### BENEFITS

- Perfect dosage of the amount of polish compound
- Low weight
- Perfect handling



For industrial and professional use only.



For industrial and professional use only.

## FINISH QUADRA PAD C-10

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.906 | 85 mm | 4 | 4 |
| 151.640 | 145 mm | 1 | 1 |
| 151.905 | 160 mm | 1 | 1 |

### DESCRIPTION

- Finish foam pad
- Hardness: Hard
- Spider cut
- Double layer construction

### AREA OF APPLICATION

- For processing of cutting compounds

### BENEFITS

- Double layer construction supports the foam and provides a consistent performance
- Spider cut for more aggressivity

### APPLICATION ADVICE

We recommend using the Carsystem Polish C-10 strong.

## FINISH SANDWICH PAD C-30

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.908 | 85 mm | 4 | 4 |
| 151.639 | 145 mm | 1 | 1 |

### DESCRIPTION

- Finish foam pad
- Hardness: Medium
- Double layer construction

### AREA OF APPLICATION

- For processing of fine and anti-hologram polishes.

### BENEFITS

- Double layer construction supports the foam and provides a consistent performance.

### APPLICATION ADVICE

We recommend using the Carsystem Polish C-30 finish.

## POLISH FOAM YELLOW

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.056 | 90 mm | 2 | 200 |
| 157.057 | 145 mm | 2 | 100 |

### DESCRIPTION

- Polish foam pad
- Hardness: Medium

### AREA OF APPLICATION

- For processing of cutting compounds

### APPLICATION ADVICE

We recommend using the Polish Foam Yellow with the Polish C-07 Cut.

## POLISH FOAM GREEN

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.050 | 90 mm | 2 | 200 |
| 157.051 | 145 mm | 2 | 100 |

### DESCRIPTION

- Polish foam pad
- Hardness: Hard

### AREA OF APPLICATION

- For processing of cutting compounds

### APPLICATION ADVICE

We recommend using the Polish Foam Green with the Polish C-05 Cut.

For industrial and professional use only.



## FINISH FOAM WHITE AH

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.052 | 90 mm | 2 | 200 |
| 157.053 | 145 mm | 2 | 100 |

### DESCRIPTION

- Finish foam pad
- Hardness: Soft

### AREA OF APPLICATION

- For processing of fine and anti-hologram-polishes and waxes

### APPLICATION ADVICE

We recommend using the Polish Foam White AH with the Polish C-30 finish.

## POLISH FOAM WHITE SC

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.054 | 90 mm | 2 | 200 |
| 157.055 | 145 mm | 2 | 100 |

### DESCRIPTION

- Polish foam pad
- Hardness: Hard

### AREA OF APPLICATION

- For processing of grinding polishes

### APPLICATION ADVICE

We recommend using the Polish Foam White SC in combination with all common abrasive polishes.

## FINISH FOAM BLACK AH

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.064 | 90 mm | 2 | 200 |
| 157.065 | 145 mm | 2 | 100 |

### DESCRIPTION

- Finish foam pad
- Hardness: Soft

### AREA OF APPLICATION

- For processing of fine & anti-hologram-polishes and waxes

### APPLICATION ADVICE

We recommend using the Finish Foam Black AH in combination with
all common fine and anti-hologram-polishes and waxes.

For industrial and professional use only.

## FINISH FOAM ORANGE

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.088 | 85 × 25 mm | 2 | 100 |
| 153.076 | 145 × 25 mm | 1 | 100 |

### DESCRIPTION

- Polish foam pad
- Hardness: Medium

### AREA OF APPLICATION

- For processing of cutting compounds

## LAMB WOOL PAD WHITE S EDGE

Lamb wool pad




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.163 | 80×17 mm | 1 | 1 |
| 157.232 | 130×25 mm | 1 | 10 |

### DESCRIPTION

- 100 % premium lamb wool
- Protective armour due to turned-in edge
- The turned-in edge forms an edging on the backside which fixes the backpad perfectly

### AREA OF APPLICATION

- Designed for polishing strong curves, narrow edges and hard-to-reach areas e. g. entrance areas, window frames, roof pillars

### BENEFITS

- Protects surrounding parts from damage
- Easy polishing also in hard to reach areas
- Very fast removal of scratches
- Highest quality offers extremely long durability

## LAMB WOOL PAD GOLD S

Lamb wool pad




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.166 | 80×17 mm | 1 | 500 |
| 157.290 | 150×17 mm | 1 | 10 |

### DESCRIPTION

- 100% lamb wool
- Soft backpad

### AREA OF APPLICATION

- For processing of cutting compounds

### BENEFITS

- Highest quality offers extreme long durability
- Polishing on a low temperature level
- Very high cutting power for an efficient removal of sanding marks

For industrial and professional use only.



## RUPES POLISH PAD

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.854 | Ultra fine / white / 130 / 150 mm | 1 | 1 |
| 158.853 | Fine / yellow / 130 / 150 mm | 1 | 1 |
| 158.856 | Ultra fine / white / 150 / 180 mm | 1 | 1 |
| 158.855 | Fine / yellow / 150 / 180 mm | 1 | 1 |

### DESCRIPTION

- Polish foam pad
- Hardness: Ultra fine, fine

### AREA OF APPLICATION

- The 9.DA pad FINE is suitable for processing abrasive polishes
- The 9.DA pad ULTRA FINE is suitable for processing anti-hologram polishes

### BENEFITS

- Also suitable for random orbital machines

## FINISH WAFFLE FOAM BLACK AH

Polishing pad




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.066 | 85 mm | 2 | 200 |
| 157.067 | 145 mm | 2 | 100 |

### DESCRIPTION

- Finish Waffle Foam
- Hardness: Soft

### AREA OF APPLICATION

- For processing of fine & anti-hologram-polishes and waxes

### APPLICATION ADVICE

We recommend using the Finish Foam Black AH in combination with all common fine & anti-hologram-polishes and waxes.

For industrial and professional use only.

## POLISH WAFFLE FOAM YELLOW

Polishing pad




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.058 | 85 mm | 2 | 200 |
| 157.059 | 145 mm | 2 | 100 |

### DESCRIPTION

- Polish waffle foam
- Hardness: Medium

### AREA OF APPLICATION

- For processing of cutting compounds

### APPLICATION ADVICE

We recommend using the Polish Foam Yellow with the Polish C-07 Cut.

## FINISH WAFFLE PAD ORANGE

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.114 | 135 × 25 mm | 2 | 100 |

### DESCRIPTION

- Polish waffle foam pad
- Hardness: Medium

### AREA OF APPLICATION

- For processing of cutting compounds

## CAR MOP WHITE

Polishing pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 133.149 | 150 × 50 mm | 1 | 10 |

### DESCRIPTION

- Polish foam pad
- Hardness: Hard

### AREA OF APPLICATION

- For processing of cutting compounds

### APPLICATION ADVICE

We recommend using the Car Mop white with Refinish 1.

## WAX PUCK

Application foam



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.565 | 128 – 130 mm | 1 | 1 |

### DESCRIPTION

- Polyurethane foam

### AREA OF APPLICATION

- Effective application of polishes and waxes

### BENEFITS

- Ergonomic handle



## FINISH CONTROL FOAM C-99

Control Foam




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.614 | 400 ml | 1 | 12 |

### DESCRIPTION

- Micro Foam-Spray
- Water-based
- Free of silicones
- Colour: White

### AREA OF APPLICATION

- For checking and cleaning between the polishing steps

### BENEFITS

- Removes oily and waxy residues
- Makes any remaining sanding marks visible

### APPLICATION ADVICE

Finish Control Foam C-99 should be removed with a microfiber cloth after a short exposure time.

## REFINISH RESTORER

Plastic conditioner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.706 | 250 ml | 1 | 12 |
| 159.707 | 1 l | 1 | 6 |

### DESCRIPTION

- Plastic conditioner
- Air drying natural oil
- Free of silicones
- Colour: Yellowish-transparent

### AREA OF APPLICATION

- For refurbishing faded plastic and metallic surfaces (e.g. aluminum, chrome, stainless steel, non ferrous metals)
- For removing polishing splashes from plastics

### BENEFITS

- Infiltrates deep into surfaces

### APPLICATION ADVICE

Only for exterior use. The product shall be tested first before application on white surfaces.

## MICRO FIBER CLOTH

Sky Blue



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.587 | 260 g/m² / light blue | 5 | 360 |

### DESCRIPTION

- Micro fiber cloth 40 × 40 cm
- 260 g/m²
- 80% polyester / 20% polyamide
- Ultrasonic cut

### AREA OF APPLICATION

- For all common cleaning works.

### BENEFITS

- The edges do not scratch

### APPLICATION ADVICE

Washable up to 30 °C without detergents.

## MICRO FIBER CLOTH

Wave Cut



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.588 | 300 g/m² / white | 5 | 300 |

### DESCRIPTION

- Micro fiber cloth 40 × 40 cm
- 300 g/m²
- 80% polyester / 20% polyamide
- With ultrasonic cut

### AREA OF APPLICATION

- Perfect for sharp edged panels
- For all common cleaning works

### BENEFITS

- Universal micro fiber cloth
- The edges do not scratch

### APPLICATION ADVICE

Washable up to 30 °C without detergents.

## MICRO FIBER CLOTH

2 IN 1



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.589 | 380 g/m² / dark blue | 3 | 240 |

### DESCRIPTION

- Micro fiber cloth 40 × 40 cm
- 380 g/m²
- 80% polyester / 20% polyamide
- Ultrasonic cut

### AREA OF APPLICATION

- For all common cleaning works

### BENEFITS

- Two different sides (short fibres / long fibres)
- Flexible use
- The edges do not scratch

### APPLICATION ADVICE

Washable up to 30 °C without detergents.

## MICRO FIBER CLOTH

Fluffy



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.590 | 500 g/m² / grey | 2 | 180 |

### DESCRIPTION

- Micro fiber cloth 40 × 40 cm
- 500 g/m²
- 80% polyester / 20% polyamide
- With ultrasonic cut

### AREA OF APPLICATION

- High absorption of polishes, waxes and dust
- "Final cloth", extremely gentle on the surface

### BENEFITS

- Very long and soft fibres
- Perfect absorption
- The edges do not scratch

### APPLICATION ADVICE

Washable up to 30 °C without detergents.





For industrial and professional use only.



For industrial and professional use only.



## MICRO FIBER CLOTH

Polish Extreme



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.591 | 800 g/m² / black / yellow | 1 | 100 |

### DESCRIPTION

- Micro fiber cloth 40 × 40 cm
- 800 g/m²
- 80 % polyester / 20 % polyamide
- Corded edges

### AREA OF APPLICATION

- Polishing cloth
- High absorption of polishes and waxes

### BENEFITS

- Extremely high absorption
- Very gentle on the surface
- The edges do not scratch

### APPLICATION ADVICE

Washable up to 30 °C without detergents.

## CAR POLISH ROLL

Disposable polishing cloth




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 134.582 | 370 tear-off / 36 × 40 cm | 1 | 1 |

### DESCRIPTION

- Disposable polishing cloth
- Dispenser with 370 tear-offs
- Perforated
- Size: 36x40 cm

### AREA OF APPLICATION

- Cleaning and degreasing of surfaces

### BENEFITS

- Extremely soft
- Free of lints
- Tear resistant
- Highly absorbent





## FINISH BACK PAD M-14

Finish back pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.721 | 123 mm | 1 | 1 |

### DESCRIPTION

- Finish Back Pad for polishing pads with Velcro®
- Extra thick foam pad
- Degree of hardness: Soft
- Thread: M-14

### BENEFITS

- Adapts perfectly to uneven surfaces
- Distributes the pressure on the surface more evenly

For industrial and professional use only.

## FINISH BACK PAD

Finish back pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.206 | 128 mm | 1 | 10 |

### DESCRIPTION

- Finish back pad for polishing pads
- Thread: M14

## POLISHING BACK PAD

Finish back pad



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.916 | M6 / 77 mm | 1 | 1 |

### DESCRIPTION

- Replacement back pad for Polishing Machine RC166
- Thread: M6 (fixed screw)

### APPLICATION ADVICE

The back pad can be used for the RC 166 polishing machine or the 159.007 RUPES 9P01.055 Velcro® back pad M6 / 75 mm.

# ROTARY POLISHER CSH-CRP01 KIT

NEW

Rotary Polisher, cordless





| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.822 | CSH-CRP01 | 1 | 6 |

## DESCRIPTION

- Lightweight, handy cordless polishing machine
- Adjustable speed levels: from 700 to 2,500 rpm
- Continuous battery life: 30 minutes
- Battery life with interruptions: up to 2 days
- Charging time: 60 minutes
- Thread size of the back pad: 1/4"

## AREA OF APPLICATION

- Removing scratches, polishing painted surfaces, and applying waxes and polishes for a glossy finish. Also suitable for interiors, interior trims and chrome accents.

## BENEFITS

- Flexible – no cables or pneumatic hoses required
- Fatigue-free – well-balanced, ergonomic design
- User-friendly – low noise levels and minimal vibration
- Adjustable speed control – precise settings for delicate paints or demanding surfaces
- Practical – dust-free and secure storage in the included case



# ORBITAL SANDER CSH-CMS01 KIT

NEW

Cordless orbital sander





| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.067 | CSH-CMS01 / 3 mm | 1 | 6 |
| 159.062 | Mini back pad 31 mm grip | 1 | 1 |
| 159.068 | Mini back pad 31 mm stick | 1 | 1 |

## DESCRIPTION

- Light, handy cordless orbital sander
- 3 mm orbit
- Speed adjustable in steps from 4,000 – 10,000 rpm
- Battery life in continuous use: 40 minutes
- Battery life with interruptions: up to 2 days
- Charging time: 60 Minutes

## AREA OF APPLICATION

- For spot sanding. To remove paint defects such as dust, particles, etc.

## BENEFITS

- Flexible – no cables or air hoses
- Non-fatiguing – balanced, ergonomic design
- User-friendly – low noise, low vibrations
- Practical – dust-free and safe storage in the case



For industrial and professional use only.

## RUPES POLISHING MACHINE LH19E

Polishing machine, Bigfoot



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.322 | LH19E | 1 | 1 |
| 157.640 | Polishing back pad M14 | 1 | 1 |

### DESCRIPTION

- Electric polishing machine
- Rotating
- Ø Velcro® back pad: 125 – 165 mm
- Adjustable speed up to 1,700 rpm.
- Thread: M14

## POLISHING MACHINE RC 166

Polishing machine, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.723 | Mini Polishing Machine RC 166 incl. polishing back pad | 1 | 1 |

### DESCRIPTION

- Pneumatic polishing machine
- Incl. back pad: 77 mm
- Adjustable speed up to 2,500 rpm.
- Thread: M6

### APPLICATION ADVICE

The 159.007 RUPES 9P01.055 Velcro backing pad M6 / 75 mm can be used as well.

## RUPES POLISHING MACHINE LHR15

Polishing machine, electric, Bigfoot



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.323 | LHR15 III | 1 | 1 |
| 157.641 | Polishing back pad 125 mm | 1 | 1 |

### DESCRIPTION

- Electric random orbital polishing machine
- 15 mm orbit diameter
- Velcro® back pad: 125 mm
- Adjustable speed up to 5,200 rpm.
- Thread: M8-F

## MINI SANDING MACHINE RC 9330

Mini sanding machine, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.724 | Mini sanding machine / incl. back pad stick and grip | 1 | 1 |

### DESCRIPTION

- Pneumatic random orbital sander for daisy discs incl. 2 back pads (for Velcro® and PSA discs)
- Adjustable speed up to 7,500 rpm.
- Thread: 5/16"

### AREA OF APPLICATION

- Finish sanding with daisy discs
- For Velcro® and PSA discs

For industrial and professional use only.



## RUPES MINI POLISHING MACHINE HLR75STB

Polishing Machine, battery powered



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.647 | HLR 75 STB battery powered | 1 | 1 |

### DESCRIPTION

- Battery powered mini polishing machine
- Battery with LED display: 18 V – 2.5 Ah
- Battery life: 35 – 45 min.
- Battery charging time: 35 min.
- Orbital
- 12 mm orbital diameter
- Back pad: 75 mm
- Adjustable speed up to 5,500 rpm
- Scope of delivery:
- HLR75STB polishing machine
- 2 × rechargeable batteries 18 V – 2.5 Ah
- 1 × battery charger

## RUPES ANGLE POLISHING MACHINE LH76P

Angle polishing machine, pneumatic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.331 | LH76P | 1 | 1 |

### DESCRIPTION

- Pneumatic polishing machine
- Velcro® back pad: 75 mm
- Adjustable speed up to 5,000 rpm.
- Thread: 3/8"

For industrial and professional use only.

**ADHESIVES, SEALANTS AND PROTECTION COATINGS FOR UNDERBODY AND BODYWORK**

# BONDING - SEALING

## CATEGORY




**Sealing seams, glueing windscreens, side windows and rear windows in bodywork and filling holes has never been easier – CARSYSTEMs products in the “Bonding & Sealing” category provide you with perfect glass bonding glues, sealing and repair compounds and help you achieve flawless results. Protect your vehicle optimally with our products for underbody, bodywork and stone chip protection and supplement your equipment with spray guns, tapes, brushes and sound deadening panels.**

## UNIFLEX PU

Bonding and sealing compound




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.160 | White / 310 ml | 1 | 12 |
| 159.161 | Grey / 310 ml | 1 | 12 |
| 159.162 | Black / 310 ml | 1 | 12 |

### DESCRIPTION

- Bonding and sealing compound
- Polyurethane

### AREA OF APPLICATION

- Elastic bonding of GRP and metal
- Sealing of seams, joints and fittings

### BENEFITS

- Fast drying
- Overpaintable

## UNIFLEX MS

Sprayable seam sealer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 135.119 | Beige / 310 ml | 1 | 12 |
| 135.706 | Black / 310 ml | 1 | 12 |
| 159.108 | Grey / 290 ml | 1 | 12 |

### DESCRIPTION

- Spray- and brushable seam sealer
- Poly-Oxy-Propylene (POP) copolymer

### AREA OF APPLICATION

- Seam sealing for overlapping panels and welded seams in original structure e. g. vehicle and carbody repair, container construction, metal construction, ventilation engineering and air-condition technology

### BENEFITS

- Fast drying
- Stone chip protection

### APPLICATION ADVICE

Keep UNIFLEX-MS away from fresh, not finally hardened PU material.



## UNIFLEX GLAS

Glass bonding glue




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.927 | Black / 310 ml | 1 | 12 |

### DESCRIPTION

- Glass bonding glue
- 1K Polyurethane
- FMVSS 212 tested

### AREA OF APPLICATION

- For glueing front, side and rear windows

### APPLICATION ADVICE

Holding time: 2 hours (23 °C and 50% rel. humidity) for cars with driver and co-driver airbags. Processing temperature: 5 °C to 40 °C.

## UNIFLEX GLAS HM

Glass bonding glue – High modulus – non-conductive




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.928 | Black / 310 ml | 1 | 12 |

### DESCRIPTION

- Glass bonding glue
- 1K Polyurethane
- High modulus and non-conductive
- FMVSS 208/212 tested

### AREA OF APPLICATION

- For glueing front, side and rear windows

### BENEFITS

- Fast drying
- High modulus glue (high stiffness)
- Applicable for vehicles with integrated antenna

### APPLICATION ADVICE

Holding time: 30 min. (23 °C and 50% rel. humidity) for cars with driver and co-driver airbags. Processing temperature: 5 °C to 40 °C.

## UNIFLEX GLAS FAST-PRIMER

Moisture curing glass-primer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.036 | Black / 30 ml | 1 | 25 |

### DESCRIPTION

- Moisture curing glass primer

### AREA OF APPLICATION

- Primer for Uniflex Glas and Glas HM
- Provides adhesion between glass and glass bonding glue
- Application on the ceramic zone of the window

### APPLICATION ADVICE

To use only in combination with Carsystem Uniflex Glas Fast-Cleaner Surface must be clean, dry, dust and grease-free.
Glas Fast-Primer application only after surface treatment with the Carsystem Uniflex Glas Fast-Cleaner. Shake bottle well before use.

## APPLICATOR

Applicator



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.325 | Applicator | 1 | 100 |

### DESCRIPTION

- Special applicator tool for liquid primers

### AREA OF APPLICATION

- For the application of Carsystem UNIFLEX Glas Fast-Primer

For industrial and professional use only.



## KS-50

Sealing compound – brushable




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.801 | 1 kg | 1 | 12 |

### DESCRIPTION

- Brushable sealing compound
- Permanently elastic
- Based on synthetic rubber
- Temperature resistance: -25 °C to 80 °C
- Colour: Grey

### AREA OF APPLICATION

- Front and back apron, joints and trim pieces, inside the trunk and foot compartment, wheel cases etc.

### APPLICATION ADVICE

Overpaintable after application of an adhesion primer.

## KS-100

Underbody protection bitumen




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.032 | 1 l | 1 | 12 |

### DESCRIPTION

- Brushable underbody protection
- Based on bitumen
- Thixotropic bitumen-resin composite
- Colour: Black

### AREA OF APPLICATION

- Underbody protection for car bodies

### APPLICATION ADVICE

Not overpaintable.

For industrial and professional use only.

## KS-200

Cavity protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.062 | 1 l | 1 | 12 |

### DESCRIPTION

- Sprayable cavity protection
- Wax-like cavity protection
- Colour: Brown transparent
- Melting point: 95 °C
- Colour: Brown transparent

### AREA OF APPLICATION

- For preserving all cavities of car bodies

### BENEFITS

- High creeping capacity also on hard-to-reach areas
- Rust protection
- Adhesion on metal

### APPLICATION ADVICE

Not overpaintable.

## KS-250

Cavity protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.061 | 500 ml / incl. hose | 1 | 12 |
| 159.332 | Replacement tube / 60 cm | 1 | 1 |

### DESCRIPTION

- Cavity protection spray
- Wax like cavity protection
- Melting point: 160 °C
- Colour: Brown transparent

### AREA OF APPLICATION

- For renewing or repairing of existing coatings

### BENEFITS

- Very high melting point
- Drip-free
- Rust protection
- Adhesion on metal

### APPLICATION ADVICE

Not overpaintable.



## KS-300

Cavity wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.650 | White transparent / 1 l | 1 | 12 |

### DESCRIPTION

- Sprayable cavity protection
- Wax-like cavity protection
- Colour: White transparent
- Melting point: 160 °C
- Colour: White transparent

### AREA OF APPLICATION

- For preserving all cavities of car bodies

### BENEFITS

- Very high melting point
- Drip-free
- Rust protection
- Adhesion on metal

### APPLICATION ADVICE

Not overpaintable.

## KS-400

Rust protection wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.468 | 500 ml | 1 | 12 |

### DESCRIPTION

- Rust protection wax
- Liquid rust protection
- Temperature resistance: -25 °C to +160 °C
- Colour: Transparent

### AREA OF APPLICATION

- Transparent conserving of rust exposed parts on car bodies
- Suitable to protect subareas of the engine
- Protects also hinges

### BENEFITS

- Good water displacement
- Very temperature resistant

### APPLICATION ADVICE

Not overpaintable.

## KS-500

Underbody protection bitumen




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.034 | 1 l | 1 | 12 |
| 132.483 | 60 l | 60 | 60 |

### DESCRIPTION

- Sprayable underbody protection
- Based on bitumen
- Colour: Black

### AREA OF APPLICATION

- Permanent underbody protection for car bodies

### BENEFITS

- Vibration absorbing
- Anti-noise compound

### APPLICATION ADVICE

Not overpaintable.

## KS-550

Underbody protection bitumen




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.029 | 500 ml | 1 | 12 |

### DESCRIPTION

- Underbody protection spray
- Based on bitumen
- Colour: Black

### AREA OF APPLICATION

- For renewing or repairing of existing underbody coatings

### BENEFITS

- No gun application necessary

### APPLICATION ADVICE

Not overpaintable.

For industrial and professional use only.



## KS-800

Underbody protection wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.095 | 1 l | 1 | 12 |

### DESCRIPTION

- Sprayable underbody protection wax
- Permanent rust protection based on wax
- Colour: Black

### AREA OF APPLICATION

- Permanent underbody protection for car bodies

### BENEFITS

- High water displacement

### APPLICATION ADVICE

Not overpaintable.

## KS-850

Underbody protection wax




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.094 | 500 ml | 1 | 12 |

### DESCRIPTION

- Underbody protection wax spray
- Permanent rust protection based on wax
- Temperature resistance: -25 °C to +80 °C
- Colour: Brown

### AREA OF APPLICATION

- For renewing or repairing of existing underbody coatings

### BENEFITS

- Good water displacement

### APPLICATION ADVICE

Not overpaintable.

For industrial and professional use only.

## KS-1000

Stone chip protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.266 | White / 1 l | 1 | 12 |
| 149.264 | Grey / 1 l | 1 | 12 |
| 149.265 | Black / 1 l | 1 | 12 |

### DESCRIPTION

- Sprayable stone chip and underbody protection
- Based on plastic rubber
- Free of asbestos

### AREA OF APPLICATION

- Underbody treatment for car bodies
- Stone chip protection for spoilers, sills and lower door areas

### BENEFITS

- Vibration absorbing
- Anti-noise compound
- Also suitable for PVC substrates

### APPLICATION ADVICE

Overpaintable after application of an adhesion primer.

## KS-1050

Stone chip protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.022 | Grey / 500 ml | 1 | 12 |
| 126.023 | Black / 500 ml | 1 | 12 |

### DESCRIPTION

- Underbody protection spray
- Based on synthetic rubber
- Free of asbestos

### AREA OF APPLICATION

- For renewing or repairing of existing stone chip protections

### BENEFITS

- No gun application necessary
- Also suitable for PVC substrates

### APPLICATION ADVICE

Overpaintable after application of an adhesion primer.



## KS-3000 PLUS

HS stone chip protection




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.622 | Black / 1 l | 1 | 12 |
| 152.804 | Grey / 1 l | 1 | 12 |

### DESCRIPTION

- Sprayable stone chip and underbody protection
- Rubber/resin basis

### AREA OF APPLICATION

- Stone chip and underbody protection for car bodies

### BENEFITS

- Vibration absorbing
- Anti-noise compound
- Very weather resistant
- Very high abrasion resistance

### APPLICATION ADVICE

Overpaintable with water base paint without a primer. Overpaintable with 2K or acrylic paints after application of an adhesion primer. Suitable for oven drying. Very good sandable after final hardness. Variable structure fine or rough possible.

## KS-4000

Stone chip protection water-based




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.122 | Black / 1 L | 1 | 12 |

### DESCRIPTION

- Sprayable stone chip protection
- Water-based
- Free of solvents

### AREA OF APPLICATION

- Sprayable stone chip protection and seam sealer for car bodies

### BENEFITS

- Vibration absorbing
- Anti-noise compound
- Solvent resistant
- Very high abrasion resistance

### APPLICATION ADVICE

Overpaintable after application of an adhesion primer. Suitable for oven drying. Very good sandable after final hardness. Variable structure fine or rough possible.

## MOUNT TAPE

Double sided adhesive tape

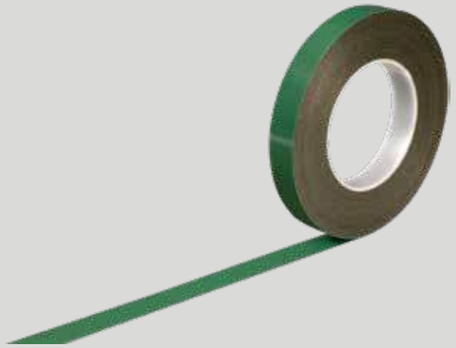

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.712 | 9 mm × 10 m | 2 | 20 |
| 125.713 | 12 mm × 10 m | 2 | 20 |
| 125.720 | 19 mm × 10 m | 1 | 10 |

### DESCRIPTION

- Double sided tape
- Temperature resistance: -40 °C to +120 °C
- Black adhesive tape
- Based on polyethylene
- Modified acrylate glue

### AREA OF APPLICATION

- Usable for permanent application with high shear and UV exposure, softeners and a wide temperature range (e.g. edge lining and emblems, side bumpers, mirror glass or counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior

### BENEFITS

- High adhesive strength
- Very high UV resistance
- Good solvent resistance
- Flexible fixing also on bended surfaces

## HS-ACRYL TAPE

Double sided adhesive tape

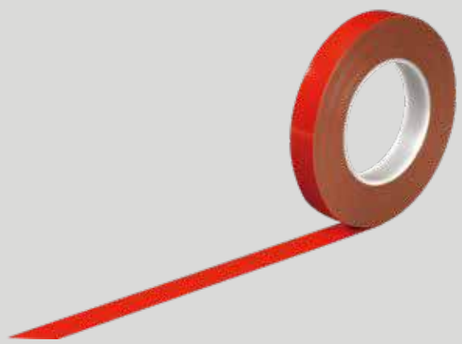

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 147.024 | 6 mm × 10 m | 2 | 20 |
| 137.072 | 9 mm × 10 m | 2 | 20 |
| 137.073 | 12 mm × 10 m | 2 | 20 |
| 137.074 | 19 mm × 10 m | 1 | 10 |
| 137.075 | 25 mm × 10 m | 1 | 10 |

### DESCRIPTION

- Double sided tape
- Temperature resistance: -40 °C to +150 °C
- Grey adhesive tape
- Based on acryl
- Acrylate glue

### AREA OF APPLICATION

- High performance tape for permanent application in extreme temperatures and humidity (e.g. edge linings and emblems, side bumpers, mirror glasses or counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior
- Suitable for metal, wood, glass and most common plastics

### BENEFITS

- Extremely high initial adhesion and strength
- High temperature and humidity resistance

For industrial and professional use only.



## STEEL BOND

Repair compound




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.501 | 125 g | 1 | 12 |

### DESCRIPTION

- 2K Repair and glue compound
- Based on solvent free epoxy resin
- High temperature resistance
- Colour: Grey metallic

### AREA OF APPLICATION

- For connecting the same or different types of material e.g. steel, aluminium, lead, wood, iron etc.
- For filling holes, funnels, cracks etc.
- Sealing and insulation material for permanent repairs especially in enviroments, where welding is not an option
- High chemical resistance against oil, gasoline and most of organic liquids

### BENEFITS

- Filling, sealing and glueing
- Very good mouldable
- Extremely durable after curing
- Low shrinkage

For industrial and professional use only.

## SOUND DEADENING PANELS

Sound deadening panels



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.055 | Bitumen black / 1 carton à 5 pcs. / 25 × 50 cm | 5 | 25 |
| 134.139 | Patterned-black / 1 carton à 10 pcs. / 50 × 50 cm | 10 | 50 |
| 134.140 | Smooth-black / 1 carton à 10 pcs. / 50 × 50 cm | 10 | 50 |

### DESCRIPTION

- Sound absorbing
- Self-adhesive

### AREA OF APPLICATION

- For insulating sounds and vibrations



## POWER MIX PRIMER

Primer + activator




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.502 | 150 ml | 1 | 12 |

### DESCRIPTION

- Adhesion primer for plastic parts
- Colour: Transparent

### AREA OF APPLICATION

- Adhesion primer for glueing different plastic parts

## POWER PU BOND

2K PU glue




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.952 | Clear / 50 ml | 2 | 2 |
| 159.954 | Black / 25 ml | 2 | 2 |
| 159.955 | Black / 50 ml | 2 | 2 |

### DESCRIPTION

- 2K Polyurethane glue

### AREA OF APPLICATION

- Repair of plastic parts
- Suitable for metal, wood, stone, concrete or glass
- For wide area glueing and filling of cavities

### APPLICATION ADVICE

25 ml cartridges manual dosage, 50 ml cartridges for Power Mix gun. We recommend the use of the adhesion promoter Carsystem Power Mix Primer / Activator 150 ml.

For industrial and professional use only.



## POWER MIXER

Mixing tube – 25 ml



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.952 | Mixing tube / green | 12 | 12 |

### DESCRIPTION

- Plastic mixing tube
- Colour: Green

### AREA OF APPLICATION

- Mixing tube for Carsystem Power Mix 25 ml cartridges

## POWER MIXER

Mixing tube – 50 ml



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.926 | Mixing tube / blue | 12 | 12 |

### DESCRIPTION

- Plastic mixing tube
- Colour: Blue

### AREA OF APPLICATION

- Mixing tube for Carsystem Power Mix 50 ml cartridges

## POWER MIX GUN

2K PU-glue gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.927 | Cartridge gun | 1 | 1 |

### DESCRIPTION

- Application gun for plastic repairs

### AREA OF APPLICATION

- Application gun for Carsystem Power Mix 50 ml cartridges

## POWER PU BOND FILM

Backing and supporting film



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.958 | Backing / supporting | 1 | 12 |

### DESCRIPTION

- Backing and supporting film
- Front side: With a supporting mesh
- Back side: Plain film, to be removed after curing
- Size: 12,5 × 150 cm

### AREA OF APPLICATION

- Plastic repair
- Supporting the plastic compound
- Usable with Carsystem 2K Power Mix PU compounds

For industrial and professional use only.

## UNIFLEX NOZZLE

Spare nozzles



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.292 | Nozzles for UNIFLEX PU | 12 | 12 |
| 155.241 | Nozzles for UNIFLEX MS | 12 | 12 |

### DESCRIPTION

- Spare nozzles for Carsystem Uniflex cartridges

### AREA OF APPLICATION

- Spare nozzles for Carsystem UNIFLEX PU and MS cartridges
- Fits only for cartridges

## UNIFLEX ADAPTER NOZZLE

Wing tip



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.009 | Blade wing tip / Bag of 10 | 1 | 1 |

### DESCRIPTION

- Nozzle for seam sealing
- Wing tip

### AREA OF APPLICATION

- Seam sealing on folded edges
- Fits only for cartridges

## UNIFLEX ADAPTER NOZZLE

V-Nozzle



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.010 | V-nozzle / bag of 10 | 1 | 1 |

### DESCRIPTION

- Nozzle for seam sealing
- "V-form" nozzle

### AREA OF APPLICATION

- For an even sealing of folded edges
- Fits only for cartridges

## KS-BRUSH

Nylon brush



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.453 | 30 mm | 1 | 70 |

### DESCRIPTION

- Special brush with nylon bristles

### AREA OF APPLICATION

- For processing sealing compounds



## UNIFLEX AIR GUN

Air gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.224 | Uniflex Air Gun | 1 | 1 |

### DESCRIPTION

- Cartridge air gun for the extrusion of 1K sealing compounds

### AREA OF APPLICATION

- For extruding of seam sealer
- For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
- For processing with Uniflex cartridges (PU, MS, Glas, Glas HM)

## UNIFLEX GUN

Manual gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 135.108 | Classic for 310 ml | 1 | 1 |
| 139.286 | Top for 290 – 400 ml | 1 | 1 |

### DESCRIPTION

- Manual gun for the extrusion of 1K sealing compounds

### AREA OF APPLICATION

- For processing of Carsystem Uniflex cartridges (PU, MS, Glas, Glas HM)
- Classic: for 290 ml / 310 ml cartridges
- Top: for 290 ml / 310 ml cartridges and aluminum bags up to 400 ml

## MS AIR GUN

MS spray gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.681 | MS Air Gun | 1 | 1 |
| 131.563 | Spare nozzle set | 1 | 1 |
| 140.075 | MS Air Gun nozzle | 1 | 1 |

### DESCRIPTION

- Pneumatic cartridge gun for the extrusion and spraying of 1K sealing compounds

### AREA OF APPLICATION

- Spraying and extruding of 1K sealing materials
- For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
- For processing of Uniflex cartridges (PU, MS, Glas, Glas HM)

## KS-GUN

Underbody protection gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.032 | Gun for underbody protection | 1 | 1 |
| 142.279 | Tube set / 0.95 m | 1 | 1 |
| 147.956 | KS-Gun replacement nozzle | 1 | 1 |
| 158.017 | KS-Gun nozzle | 1 | 1 |

### DESCRIPTION

- Pneumatic pressure cup gun
- Structure gun
- Cup content: 1l

### AREA OF APPLICATION

- Rust protection, underbody protection and cavity protection
- Processing of solvent- and water-based products

### BENEFITS

- Amount of air and material output adjustable
- Various structures possible

For industrial and professional use only.



For industrial and professional use only.

## KS-DUAL GUN

Underbody protection gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.040 | Incl. 2 additional suction pipes / without cavity protection tube | 1 | 1 |
| 126.058 | 0.9m / cavity protection tube | 1 | 1 |
| 126.048 | Replacement suction pipes | 1 | 1 |

### DESCRIPTION

- Pneumatic underbody and cavity protection gun
- Including two suction pipes
- Quick coupling

### AREA OF APPLICATION

- Rust protection, underbody protection and cavity protection

### BENEFITS

- Fast change of material possible
- Low maintenance effort

**PROFESSIONAL CLEANING PRODUCTS FOR A PERFECT PAINTING PROCESS**

# CLEANING

## CATEGORY

**CARSYSTEM** offers optimal cleaning products not only for plastic, GRP or CRP surfaces but also for spray guns, devices, car parts or constructions of paint shops.
The **CARSYSTEM** tack cloths in different variations and the paper cleaning cloths ensu e removal of dust. Our products are qualified for the removal of silicones, fats, oils, waxes, tar, or glue odds and provide cleanliness for and around your workspace.

## SILICONE REMOVER MILD

Silicone remover – solvent based




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.212 | Drump tap for 30 l | 1 | 1 |
| 146.704 | 5 l | 1 | 4 |
| 146.711 | 1 l | 1 | 12 |
| 147.023 | 30 l | 1 | 1 |

### DESCRIPTION

- Silicone remover
- Solvent based

### AREA OF APPLICATION

- Silicone and grease remover
- Cleaning of dirt residues prior to painting
- For all daily cleaning works

## SILICONE REMOVER WATER

Silicone remover – water based




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 146.705 | 5 l | 1 | 5 |

### DESCRIPTION

- Silicone remover
- Water-based

### AREA OF APPLICATION

- Removes salt and minerals from the surface
- Rinsing of water-base spray guns

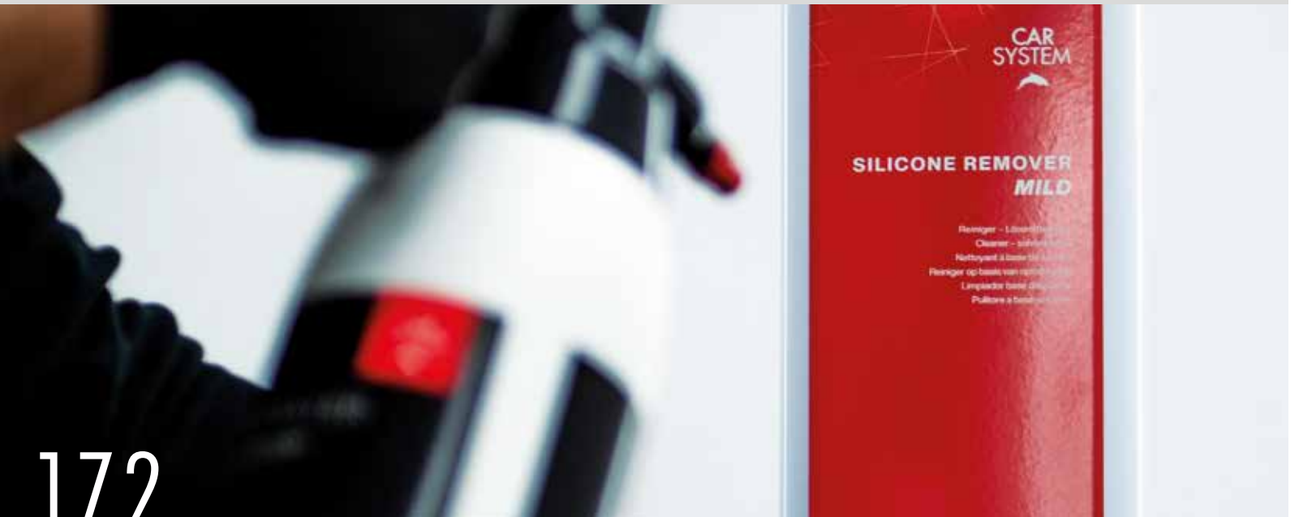




## ISO-VE 7030

Isopropanol cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.034 | 5 l | 1 | 1 |
| 157.345 | 20 l | 1 | 1 |

### DESCRIPTION

- Special cleaner
- Isopropanol-based

### AREA OF APPLICATION

- Perfectly suitable for gentle cleaning of plastic, GRP or CRP surfaces
- Residue-free removal of release agents, dirt, grease, oil, silicone, as well as residual minerals and salts from the surface
- Antistatic

### BENEFITS

- Antistatic
- Very volatile
- Extremely fast cleaning

### APPLICATION ADVICE

Could etch 1K materials

## $H_2O$ CLEANER

Cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.953 | 5 l | 1 | 1 |

### DESCRIPTION

- Intensive cleaner
- Water-based

### AREA OF APPLICATION

- Efficient and enviromently friendly cleaning of tools and parts in the body shop
- Perfect for paint stripping from panel stands

### BENEFITS

- Removes water-based and solvent-based paints, 2K primers and epoxy resin-based products
- Multiple times usage (pigments sediment on the bottom and can be strained off)
- Water-dilutable

### APPLICATION ADVICE

Air nipples can start oxidating after a long time exposure. Aluminum nipples could corrode.

For industrial and professional use only.

## PUMP SPRAYER

Pump Sprayer




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.412 | White / 1 l | 1 | 60 |
| 142.808 | Translucent / 1 l | 1 | 60 |
| 139.606 | Replacement viton sealing set | 1 | 1 |
| 146.680 | Spare nozzle | 1 | 1 |
| 153.269 | Replacement viton sealing spray head | 1 | 1 |

### DESCRIPTION

- Pump spray bottle
- 100 % recycled plastic
- Content: Max. 0,9 l

### AREA OF APPLICATION

- Application and atomisation of liquids out of buckets or barrels
- Suitable for Carsystem Silicone Remover Mild, Silicone Remover Water and ISO-VE 7030

### BENEFITS

- Adjustable atomisation

### APPLICATION ADVICE

Strong solvents can damage the seals.

## CODING CAPS

Colour code rings



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.642 | Coding caps set of 5 pcs. | 1 | 1 |

### DESCRIPTION

- Plastic colour code rings

### AREA OF APPLICATION

- Colour coding for Carsystem pump bottles

### BENEFITS

- Pump bottles can be clearly distinguished




## SPRAYGUN CLEANER

Spraygun cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.627 | 400 ml | 1 | 12 |

### DESCRIPTION

- Solvent-based paint spray gun cleaner

### AREA OF APPLICATION

- Cleaning of paint spray guns
- Removal of contamination from water- and solvent-based paints

### BENEFITS

- Easy and thorough cleaning
- Enormous time saving
- Cost-effective alternative to the spray gun cleaning machine

## COCKPIT-SPRAY

Cleaning spray




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 126.020 | 400 ml | 1 | 12 |

### DESCRIPTION

- Care and cleaning spray
- Free of silicones
- Odour: Citrus
- Colour: Transpartent

### AREA OF APPLICATION

- All interiour plastic and rubber surfaces

### BENEFITS

- Antistatic

### APPLICATION ADVICE

Avoid application on steering wheel, gear handle and foot pedals.

For industrial and professional use only.

## CAR CLEAN MULTI EXTREME BOX

Cellulose cloth



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.765 | Box à 250 pcs. / 30×38 cm | 1 | 1 |

### DESCRIPTION

- Special cellulose cleaning cloth
- 250 tear-offs in a dispenser box
- 100 % rayon fabric

### AREA OF APPLICATION

- Universal cleaning cloth for all cleaning works

### BENEFITS

- High absorbing cloth
- Good solvent resistance
- Tear resistant
- Lint free due to cutted edges
- Washable and reusable

## CAR CLEAN MULTI

Paper cleaning cloth

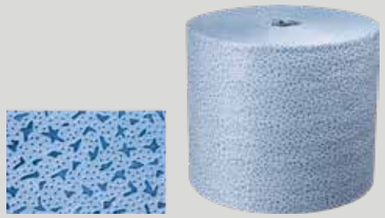

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 134.577 | 500 tear-offs / 35×32 cm | 1 | 1 |

### DESCRIPTION

- Special paper cleaning cloth
- Perforated roll

### AREA OF APPLICATION

- Perfect for higher amounts of liquid
- For paint, metal and smooth wooden surfaces
- Takes off solvents, oil and lubricants

### BENEFITS

- High absorbing cloth
- Good solvent resistance
- Tear resistant

## CLEANING WIPES

Cleaning wipes



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.458 | cleaning wipes roll / 475 tear-offs / 38×30 cm | 1 | 1 |

### DESCRIPTION

- Special cleaning wipes
- Dispenser roll perforated tear-offs
- Fine multiholes

### AREA OF APPLICATION

- Universal soft cleaning cloth for all cleaning works

### BENEFITS

- Extremely absorbent
- Solvent resistant
- Lint-free cleaning
- Ultra soft
- Cleans also in deepest structures
- Extremely tear resistant, even when wet
- Washable and reusable

## CAR CLEAN TRIPLE BLUE

Paper cleaning cloth



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 134.578 | 500 tear-offs / 36×36 cm | 2 | 2 |
| 134.579 | 1,000 tear-offs / 36×36 cm | 1 | 1 |

### DESCRIPTION

- Paper cleaning cloth 3-layers
- Perforated roll
- All layers fully bonded

### AREA OF APPLICATION

- For all standard cleaning works

## CAR CLEAN DOUBLE BLUE

Paper cleaning cloth



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 134.580 | 1,000 tear-offs / 36×36 cm | 2 | 2 |

### DESCRIPTION

- Paper cleaning cloth 2-layers
- Perforated roll
- Layers fully bonded

### AREA OF APPLICATION

- For all standard cleaning works

## CAR CLEAN DOUBLE WHITE

Paper cleaning cloth



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.253 | 1,500 tear-offs / 38×24 cm | 2 | 2 |

### DESCRIPTION

- Paper cleaning cloth 2-layers
- Perforated roll

### AREA OF APPLICATION

- For all standard cleaning works

For industrial and professional use only.

For industrial and professional use only.



## STAUB STOP WATER BLACK

Tack cloth




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.033 | 10 pcs. / black / 32 × 40 cm | 10 | 180 |

### DESCRIPTION

- Tack cloth
- Non-woven with hot melt-impregnation
- Silicone & lint free

### AREA OF APPLICATION

- Removal of dust
- Especially for cleaning the base coat prior to the clear coat application
- Removal of small and medium dust particles in the industry

### BENEFITS

- The black, non-woven tack cloth offers very good visual control of contaminated areas on the surface
- Resealable packaging
- Leaves no adhesive residues on the cleaned surface
- Acrylic binder for better durability and abrasion resistance without fiber loss
- Retains twice as much dust than traditional tack cloths

## STAUB STOP WATER

Tack cloth




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.538 | 10 pcs. | 10 | 240 |

### DESCRIPTION

- Tack cloth
- Micro fiber fabric
- Water-soluble impregnation
- Free of silicones

### AREA OF APPLICATION

- Absorption of dust
- Especially for cleaning the base coat prior to the clear coat application

### BENEFITS

- No tacky residues
- Leaves no adhesive residues on the cleaned surface

## STAUB STOP

Tack cloth




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 132.615 | 1 unit | 1 | 500 |
| 132.616 | 5 units (pack) | 1 | 100 |

### DESCRIPTION

- Tack cloth
- Rayon fabric
- Slightly sticky surface
- Free of silicones

### AREA OF APPLICATION

- Dust removal prior to painting

### BENEFITS

- Very good dust removal
- Does not dry out

## STAUB STOP SUPER WAVE

Tack cloth




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.124 | 1 unit / 80 × 80 cm | 1 | 50 |

### DESCRIPTION

- Tack cloth
- Cotton-rayon mix in wave form
- Wave formed surface
- Free of silicones

### AREA OF APPLICATION

- Removal of dust prior to painting

### BENEFITS

- Wave form enlarges the absorption quantity
- Is able to hold incredible amounts of dust
- Wave form adapts to hand and surface



For industrial and professional use only.



## NANO EASY CLEANER

Cleaning sponge



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.383 | Cleaning sponge | 1 | 10 |

### DESCRIPTION

- Cleaning sponge with nano coating

### AREA OF APPLICATION

- Cleaning of glass, paint and plastics
- Suitable for windows, head lamps, mirrors and painted surfaces
- Do not use in conjunction with cleaning agents, cleaner can attack the nano coating

### BENEFITS

- Special nano coating removes insects, overspray and dirt easily.

## SQUEEZER

Squeezer sponge




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.987 | Squeezer sponge with Carsystem brand | 1 | 520 |

### DESCRIPTION

- Soft swelling sponge made of absorbent natural fibers

## FINISH CLAY

Cleaning clay




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 147.468 | 200 g | 1 | 10 |

### DESCRIPTION

- Cleaning clay

### AREA OF APPLICATION

- Residue and scratch-free removal of overspray, flash rust, insects and tree gum from painted surfaces

### BENEFITS

- Enviromently friendly – no solvents
- Remains wet and does not get brittle (store it in the box)

## SCRAPER

Paint off blade



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.984 | Scraper | 1 | 200 |
| 140.985 | Refill (100 Blades) | 1 | 50 |

### DESCRIPTION

- Paint off security blade

### AREA OF APPLICATION

- Removal of overspray from glass surfaces

## GUN CLEAN SET

Gun cleaning set




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.520 | Set | 1 | 50 |

### DESCRIPTION

- Gun cleaning set
- 17 single items
- 6 different needles and 11 different brushes




For industrial and professional use only.



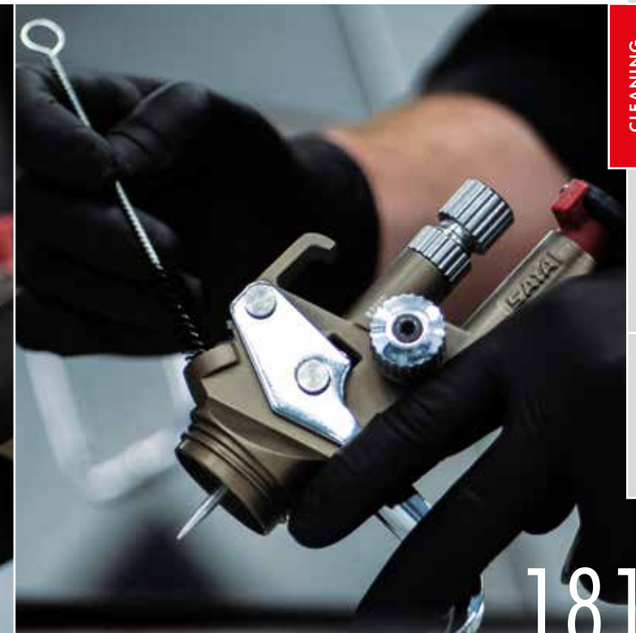

FUNCTIONAL &
PROTECTIVE EQUIPMENT
FOR THE PAINTER




# PERSONAL SAFETY

CATEGORY

Perfectly equipped and well protected - **CARSYSTEM** offers you a wide range of products for occupational safety. Whether respiratory protection products, protective gloves, comfortable painting suits or high-quality safety glasses made of polycarbonate, you will find the right protective clothing for your needs.
Also discover our skin-friendly hand cleaner, which removes stubborn dirt caused by paints, oil-based paints, resins or varnishes.

## 30 YEARS LTD. COVERALL JACKET

Protective coverall

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.654 | Coverall jacket / S | 1 | 30 |
| 159.655 | Coverall jacket / M | 1 | 30 |
| 159.656 | Coverall jacket / L | 1 | 30 |
| 159.657 | Coverall jacket / XL | 1 | 30 |
| 159.658 | Coverall jacket / XXL | 1 | 30 |
| 159.659 | Coverall jacket / 3XL | 1 | 30 |

### DESCRIPTION

- Protective coverall of PPE Cat. I in limited “Carsystem 30 Years Anniversary” design
- Jacket and pants can be ordered separately
- Comfortable
- Very good fit
- Antistatic due to carbon fibres
- Silicon free
- Dust and lint free

### AREA OF APPLICATION

- Protects against low risks e. g. water-based paint or mild cleaners
- Protection against overspray

### BENEFITS

- Limited design is a eye-catcher in every paint booth
- Individual size selection of jacket and pants
- Many storage options on jacket
- Zip cover provides additional protection against overspray
- Antistatic coating (EN 1149-1:2006)

## CLASSIC COVERALL JACKET ANTHRACITE

Protective coverall

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.194 | Anthracite / XS | 1 | 30 |
| 159.195 | Anthracite / S | 1 | 30 |
| 159.196 | Anthracite / M | 1 | 30 |
| 159.197 | Anthracite / L | 1 | 30 |
| 159.198 | Anthracite / XL | 1 | 30 |
| 159.199 | Anthracite / XXL | 1 | 30 |
| 159.200 | Anthracite / 3XL | 1 | 30 |

### DESCRIPTION

- Protective coverall of PPE Cat. I
- Jacket and pants can be ordered separately
- Comfortable
- Very good fit
- Antistatic due to carbon fibres
- Silicon free
- Dust and lint free

### AREA OF APPLICATION

- Protects against low risks e. g. water-based paint or mild cleaners
- Protection against overspray

### BENEFITS

- Individual size selection of jacket and pants
- Many storage options on jacket
- Zip cover provides additional protection against overspray
- Antistatic coating (EN 1149-1:2006)

## CLASSIC COVERALL PANTS

Protective coverall

NEW



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.180 | Anthracite / XS | 1 | 30 |
| 159.181 | Anthracite / S | 1 | 30 |
| 159.182 | Anthracite / M | 1 | 30 |
| 159.183 | Anthracite / L | 1 | 30 |
| 159.184 | Anthracite / XL | 1 | 30 |
| 159.185 | Anthracite / XXL | 1 | 30 |
| 159.186 | Anthracite / 3XL | 1 | 30 |

### DESCRIPTION

- Protective coverall of PPE Cat. I
- Jacket and trousers can be ordered separately
- Comfortable
- Very good fit
- Antistatic due to carbon fibres
- Silicon free
- Dust and lint free
- Washable up to 30 °C

### AREA OF APPLICATION

- Protects against low risks e. g. water-based paint or mild cleaners
- Protection against overspray

### BENEFITS

- Individual size selection of jacket and pants
- Many storage options on jacket and pants
- Zip cover provides additional protection against overspray
- Antistatic coating (EN 1149-1:2006)

For industrial and professional use only.

## EXPLORER LTD. 2-PIECE COVERALL

Protective coverall



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.120 | Coverall jacket / XS | 1 | 30 |
| 159.121 | Coverall pants / XS | 1 | 30 |
| 158.682 | Coverall jacket / S | 1 | 30 |
| 158.683 | Coverall pants / S | 1 | 30 |
| 158.684 | Coverall jacket / M | 1 | 30 |
| 158.685 | Coverall pants / M | 1 | 30 |
| 158.686 | Coverall jacket / L | 1 | 30 |
| 158.687 | Coverall pants / L | 1 | 30 |
| 158.688 | Coverall jacket / XL | 1 | 30 |
| 158.689 | Coverall pants / XL | 1 | 30 |
| 158.690 | Coverall jacket / XXL | 1 | 30 |
| 158.691 | Coverall pants / XXL | 1 | 30 |
| 158.692 | Coverall jacket / 3XL | 1 | 30 |
| 158.693 | Coverall pants / 3XL | 1 | 30 |

Limited Edition - only while stocks last.

### DESCRIPTION

- Two-piece protective suit of PPE Cat. I
- Jacket and trousers can be ordered separately
- Comfortable
- Very good fit
- Antistatic due to carbon fibres
- Silicon free
- Dust and lint free
- Washable up to 30 °C

### AREA OF APPLICATION

- Protects against low risks e. g. water-based paint or mild cleaners
- Protection against overspray

### BENEFITS

- Individual size selection of jacket and pants
- Many storage options on jacket and pants
- Zip cover provides additional protection against overspray
- Antistatic coating (EN 1149-1:2006)

## COVERALL BLACK SUIT

Protective coverall



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.775 | S | 1 | 20 |
| 159.114 | M | 1 | 20 |
| 159.115 | L | 1 | 20 |
| 159.116 | XL | 1 | 20 |
| 159.117 | XXL | 1 | 20 |
| 159.118 | 3XL | 1 | 20 |

### DESCRIPTION

- Protective coverall
- 99 % nylon, 1 % carbon
- Washable up to 30 °C
- PPE Cat. I
- Free of silicones
- Dust and lint free

### AREA OF APPLICATION

- Protects from unharmful chemicals e. g. water-based paint or mild cleaners

### BENEFITS

- Antistatic coating (EN 1149-3:2004)
- Protection against overspray
- Extremely breathable due to its special elastic birds eye fabric
- The knitted cuffs close wrists and ankles perfectly tight and offer a perfect comfort
- Elastic areas on the back and modern cut provide a perfect adaption to the body shape

## PAINT OVERALL BLUE

Protective coverall



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.232 | S | 1 | 50 |
| 139.233 | M | 1 | 50 |
| 138.472 | L | 1 | 50 |
| 138.473 | XL | 1 | 50 |
| 139.234 | XXL | 1 | 50 |
| 152.968 | 3XL | 1 | 50 |

### DESCRIPTION

- Protective coverall
- Soft polyester fabric
- PPE-Cat. I

### AREA OF APPLICATION

- Protects from unharmful chemicals e. g. water-based paint or mild cleaners

### BENEFITS

- Antistatic coating (EN 1149-1:2006)
- Dust and lint-free
- Protection against overspray
- Free of silicones

For industrial and professional use only.

## DISPOSABLE PROTECTIVE COVERALL

Protective Coverall



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.616 | S | 1 | 25 |
| 155.617 | M | 1 | 25 |
| 155.618 | L | 1 | 25 |
| 155.619 | XL | 1 | 25 |
| 155.620 | XXL | 1 | 25 |
| 155.621 | 3XL | 1 | 25 |

### DESCRIPTION

- Disposable protective coverall
- PPE-Cat III, Type 5 and 6
- Free of silicone and latex
- Dust and lint free

### AREA OF APPLICATION

- Perfect for painting in the spray booth
- Protects against overspray, solvents, water and harmful dust

### BENEFITS

- Antistatic coating (EN 1149-5:2008)
- Breathable
- The knitted cuffs close wrists and ankles perfectly tight and offers a perfect comfort
- Antistatic

### APPLICATION ADVICE

We recommend to exchange the protective coverall after every shift to prevent linting on the breathable back side.

For industrial and professional use only.

## STAR MASK

Respirator

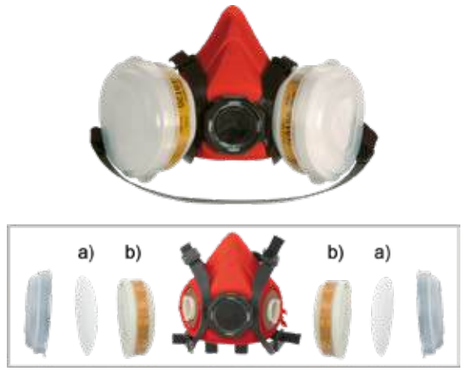


| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.143 | M | 1 | 12 |
| 141.145 | L | 1 | 12 |

### DESCRIPTION

- Half mask with filters
- Exchangable filters and pre-filters
- Bayonet fixing on the filters
- Protection class FFA2 P2 R

### AREA OF APPLICATION

- All common paint works

### BENEFITS

- Perfect protection against dust, dirt, organic vapours of solvents
- Pre-filter for a longer lifetime of the filters

### APPLICATION ADVICE

Attention to different regional legislations.

## STAR MASK REFILL

Charcoal filter



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.224 | Protection class A2 | 2 | 60 |

### DESCRIPTION

- Replacement filters for the Star Mask
- Charcoal filters-protection class A2

### AREA OF APPLICATION

- Protects against dust, dirt and organic vapours

## STAR MASK PRE P2 R

Pre-filters



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 141.154 | Protection class P2 | 10 | 100 |

### DESCRIPTION

- Pre-filters for Star Mask Refill
- Protection class P2

### AREA OF APPLICATION

- Protects against particles e. g. dust, smoke and aerosols

## STAR MASK DISC

Filter frame



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 144.310 | Filter Holder | 2 | 20 |

### DESCRIPTION

- Frame for the Carsystem Star Mask Pre P2 R pre-filters

### AREA OF APPLICATION

- The frame fixes the pre-filter on the charcoal filter

## STAR DUST P2

Dust mask



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.951 | Protection class P2 | 20 | 120 |

### DESCRIPTION

- Dust mask / FFP mask
- Protection class FFP2 NR
- Variable aluminium nose stripe for better fitting

### AREA OF APPLICATION

- Protects against harmful oil or water-based particles

### BENEFITS

- Soft and gentle inner section
- Suitable in combination with safety glasses

### APPLICATION ADVICE

We recommend to exchange the mask after every work shift.



## RESPIRATOR MASK FFP3 WITH VALVE

Respirator Mask FFP3



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.076 | Protection class FFP3 NR | 20 | 400 |

### DESCRIPTION

- Dust mask / FFP mask
- Protection class FFP3 NR
- Variable aluminium nose stripe for better fitting
- Exhaust valve

### AREA OF APPLICATION

- Protects against harmful and carcinogenic particles based on oil or water as well as against radioactive particles, airborne biological agents of risk groups 2 + 3 and enzymes

### BENEFITS

- Soft and gentle inner section
- Qualitative headbands for a comfortable fit
- Foam stripes around the nose
- Suitable in combination with safety glasses
- Exhaust valve reduces the heat accumulation inside the mask

### APPLICATION ADVICE

We recommend to exchange the mask after every work shift.

## RESPIRATOR MASK FFP2 WITH VALVE

Respirator mask



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.075 | Protection class FFP2 NR | 20 | 400 |

### DESCRIPTION

- Dust mask / FFP mask
- Protection class FFP2 NR
- Variable aluminium nose stripe for better fitting
- Exhaust valve

### AREA OF APPLICATION

- Protects against harmful oil- or water-based particles

### BENEFITS

- Soft and gentle inner section
- Suitable in combination with safety glasses
- Exhaust valve reduces the heat accumulation inside the mask

### APPLICATION ADVICE

We recommend to exchange the mask after every work shift.

## SAFETY LENS

Protective glasses



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.955 | Safety Lens | 1 | 12 |

### DESCRIPTION

- Safety glasses
- Polycarbonate glasses

### APPLICATION ADVICE

Glasses can be cleaned with warm water and soap.

## UV GLASSES

UV-protective glasses



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.263 | UV glasses | 1 | 12 |

### DESCRIPTION

- UV-protective glasses
- Polycarbonate glasses

### AREA OF APPLICATION

- Protects from UVA, UVB and UVC radiation

### BENEFITS

- PVC nose piece for perfect fit
- Anti-slip pads
- Scratch resistant, anti-fog glasses
- Suitable in combination with hearing protection

### APPLICATION ADVICE

Glasses can be cleaned with warm water and soap.






## NITRIL HAND PREMIUM BLACK

Protection gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 156.623 | S | 100 | 1000 |
| 156.624 | M | 100 | 1000 |
| 154.347 | L | 100 | 1000 |
| 154.348 | XL | 100 | 1000 |

### DESCRIPTION

- Nitril gloves
- 100 pieces in a dispenser box
- Free of silicones and powder

### AREA OF APPLICATION

- Protects against dirt, paint and chemicals

### BENEFITS

- Enhanced thickness
- Very elastic and tear resistant
- Perfect fit and feel

### APPLICATION ADVICE

Short time solvent resistant. Touch screen processing is possible.

## LATEX HAND I PREMIUM

Protection gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.011 | L | 50 | 500 |
| 152.012 | XL | 50 | 500 |

### DESCRIPTION

- Latex gloves
- 50 pieces in a dispenser box
- Powder-free
- Extra long cuff

### AREA OF APPLICATION

- Perfect for fast gun cleaning
- Protects from light solvents and paints

### BENEFITS

- Extra thick
- Perfect feel and touch when working with solvents and in wet / oily environments

For industrial and professional use only.

## NEOPREN HAND

Protection gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 140.939 | L / pair | 1 | 72 |
| 140.940 | XL / pair | 1 | 72 |
| 140.941 | XXL / pair | 1 | 72 |

### DESCRIPTION

- Neoprene / Latex chemical protection gloves
- Length: 30 cm

### AREA OF APPLICATION

- Perfect for handling slippery parts in moist, oily and greasy enviroments
- Protects against chemicals acids, brines, mineral oils, greases and solvents

### BENEFITS

- Perfect mixture between neoprene for chemical protection and latex for the flexibility and durability
- Palm and fingertips with honeycomb pattern for a better grip
- Good insulation against heat and cold

## SUPER NITRIL HAND I

Protection gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.130 | 9 / pair | 12 | 144 |
| 145.131 | 10 / pair | 12 | 144 |

### DESCRIPTION

- Chemical protection gloves
- Length: 30 cm
- Soft velour inner section
- Base layer: Nitril

### AREA OF APPLICATION

- Perfect for handling slippery parts in moist, oily and greasy enviroments
- Protects against chemicals

### BENEFITS

- Perfect feel and touch when working with solvents and in wet / oily environments
- Good insulation against heat and cold
- Palm and fingertips with honeycomb pattern for better grip



## PREP HAND III

Work gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.132 | 9 / pair | 12 | 144 |
| 145.133 | 10 / pair | 12 | 144 |

### DESCRIPTION

- Work gloves PU coated
- Palm and fingertips soft PU coated
- Base layer: Polyamide

### AREA OF APPLICATION

- Perfect for assembly- and grinding work without the risk of cuts or exposure to chemicals / solvents

### BENEFITS

- Extremely soft and flexible
- Breathable
- Safer grip with excellent fingertip touch
- Touch screen operation possible
- Abrasion resistance
- Perfect fit

## PREP HAND II

Work gloves



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.719 | L | 12 | 144 |
| 150.720 | XL | 12 | 144 |

### DESCRIPTION

- Work gloves PU coated
- Palm and fingertips PU coated
- Base layer: Polyamide (Nylon)

### AREA OF APPLICATION

- Perfect for assembly work without the risk of cuts or exposure to chemicals / solvents

### BENEFITS

- Breathable
- Safer grip with excellent fingertip touch
- Abrasion resistance
- Comfortable fit

## HAND CLEANER

Hand cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.356 | Bulk packing without pump / 3 L | 1 | 6 |

### DESCRIPTION

- Mild hand cleaner
- Usage during or after work
- Free of silicones
- Plant based scrubs

### AREA OF APPLICATION

- Removes even resistant dirt of greases and bitumen

### BENEFITS

- Pleasant smell
- Free of solvents
- Biodegradable
- Smooth and comfortable feel due to a natural and skin-friendly oil
- Bulk packing with 3l

## HAND CLEANER EXTREME

Hand cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.348 | Soft bottle without wall dispenser / 2 L | 1 | 6 |
| 155.357 | Bulk packing without pump / 3 L | 1 | 6 |

### DESCRIPTION

- Intensive hand cleaner
- Usage during or after work
- Free of silicones
- Plant based scrubs

### AREA OF APPLICATION

- Removes even resistant dirt of oil paint, oil paint and resins

### BENEFITS

- Pleasant apple smell
- Free of solvents
- Biodegradable
- Smooth and comfortable feel due to a natural and skin-friendly oil
- Wall mount with 2 l soft bottle
- Bulk packing with 3 l

## PUMP FOR HAND CLEANER 3 L

Pump for Hand Cleaner classic



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.359 | Pump for Hand Cleaner 3 l | 1 | 1 |

### DESCRIPTION

- The Carsystem Pump is suitable for the Hand Cleaner and Hand Cleaner Extreme 3 l.

## WALL DISPENSER FOR SOFT BOTTLE 2 L

Wall Dispenser



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.350 | Wall dispener for Soft Bottle | 1 | 1 |

### DESCRIPTION

- Wall dispenser for Hand Cleaner extreme Soft Bottle




For industrial and professional use only.

HIGH-QUALITY PAINTING ACCESSORIES FOR PERFECT EQUIPMENT



# PAINTING SUPPLIES CATEGORY

To receive the perfect result of painting, it is important to use professional varnishes, machines, and the right accessories. **CARSYSTEM** offers a huge line of high quality products like UV lamps, paint stands, practical tools and flat strips.

## PAINT TROLLEY FLEXI PLUS

Paint stand

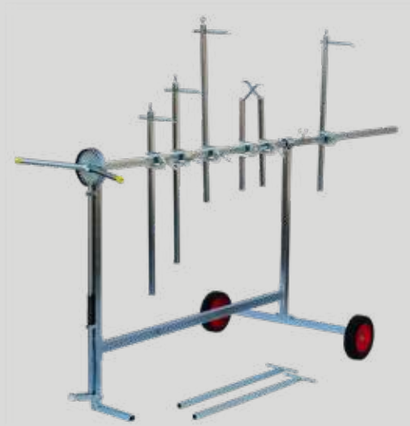

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 152.596 | Paint trolley incl. extention | 1 | 1 |

### DESCRIPTION

- Mobile paint stand with 28x adjustable axle
- Extremely robust
- Six fixing arms
- Two additional bumper fixing arms
- Dimensions: 225 × 74 × 101c m (l/w/h)
- Maximum load: 50 kg

### AREA OF APPLICATION

- Holding different car parts e. g. hoods, doors, bumpers, fenders etc.

### BENEFITS

- Extremely good quality
- Very high stability

## PAINT TROLLEY

Paint stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.253 | Paint trolley incl. extention | 1 | 1 |
| 138.848 | Spare claws for paint trolley | 1 | 1 |
| 138.849 | Fixing arm | 1 | 1 |

### DESCRIPTION

- Mobile paint stand with 360° adjustable axle
- Four fixing arms
- Two additional bumper fixing arms
- Two hooks for storing of unused fixing arms
- Paint gun holder
- Dimensions: 225 × 88 × 95 cm (l/w/h)
- Max. load: 50 kg

### AREA OF APPLICATION

- Holding different car parts e. g. hoods, doors etc.



## BUMPER STAND

Bumper paint stand




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.413 | Bumper paint stand | 1 | 1 |
| 159.702 | Fixing bar with grip pliers 190-193 | 1 | 20 |

### DESCRIPTION

- For a huge variety of different bumpers
- Mobile on wheels
- Weight load: 35 kg

### AREA OF APPLICATION

- For assembly, sanding, painting or polishing of different bumpers

### BENEFITS

- 30 seconds of set-up time / adjustment period
- Foldable flat
- Fast rotation and the possibility of locking in any position

## MULTI STAND

Paint stand




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.563 | Paint trolley multifunctional | 1 | 1 |

### DESCRIPTION

- Flexible and universally applicable rotary painting stand for body parts such as wings, doors, bonnets, boot lids, etc.
- Mobile on wheels
- Max. weight load: 35 kg

### AREA OF APPLICATION

- For painting and polishing, dent removal or assembly, for filling andsanding a wide range of body parts

## PAINT TROLLEY

Bumper paint stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 148.748 | Bumper paint stand | 1 | 1 |

### DESCRIPTION

- Height adjustable bumper paint stand
- Infinitely adjustable inclination
- Ergonomic working position
- Mobile on wheels
- All wheels individually lockable
- For a huge variety of different bumpers

### AREA OF APPLICATION

- For assembly, sanding, painting or polishing of different bumpers

## X-STAND CLASSIC

Paint stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.349 | 50 – 100 cm | 1 | 1 |

### DESCRIPTION

- Height: 50 – 100 cm
- Maximum load: 50 kg

### AREA OF APPLICATION

- Holding different car parts e. g. hoods, doors etc.

## X-STAND TOP

Paint stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.851 | 50 – 125 cm | 1 | 1 |
| 138.852 | 50 – 125 cm incl. extension | 1 | 1 |

### DESCRIPTION

- Height: 50 – 125 cm
- Maximum load: 120 kg
- Extension poles available in 55 cm

### AREA OF APPLICATION

- Holding different car parts e. g. hoods, doors etc.

## PAPER TROLLEY

Triple paper stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 138.862 | Paper Trolley | 1 | 1 |

### DESCRIPTION

- Mobile paper stand for three different paper sizes (22, 60, 90 cm)
- Including adjustable holders for masking tape rolls which fix the tapes perfectly onto the paper edge
- Dimensions: 135 × 59 × 110 cm (l/w/h)

### AREA OF APPLICATION

- For fast masking work in the paint shop

## MMIR TROLLEY "BOX"

Masking film stand




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 151.514 | MMIR Trolley Box | 1 | 1 |

### DESCRIPTION

- Mobile masking film stand for rolls in a box
- The film is unrolled directly from the box

### AREA OF APPLICATION

- For fast masking work in the paint shop

## PAPER TROLLEY 1500

Paper stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.101 | 150 cm | 1 | 1 |

### DESCRIPTION

- Mobile paper stand for rolls up to 150 cm

### AREA OF APPLICATION

- For fast masking work in the paint shop

## MMIR TROLLEY

Masking film stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 125.737 | MMIR Trolley | 1 | 1 |

### DESCRIPTION

- Mobile masking film stand for holding rolls without a box
- Dimensions: 106 × 44 × 92cm (l/w/h)

### AREA OF APPLICATION

- For fast masking work in the paint shop

For industrial and professional use only.

For industrial and professional use only.

## CAR CLEAN TROLLEY

Cleaning paper stand



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.912 | Car Clean Trolley | 1 | 1 |
| 139.913 | Car Clean Wall Holder | 1 | 1 |

### DESCRIPTION

- Floor stand or wall holder for cleaning paper rolls with a width up to 40 cm incl. garbage bag holder included

### AREA OF APPLICATION

- For flexible cleaning jobs in the paint shop

## OPENER FOR PUTTY AND FILLER CANS

Stainless steel can opener



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 158.209 | 13.2 cm | 1 | 1 |

### DESCRIPTION

- Multifunctional opener for putty and filler cans
- Hexagon recess (10 mm wrench)
- Mandrel
- Engraved ruler
- Bottle opener
- Dimensions: 13.2 cm
- Material: Stainless steel

### AREA OF APPLICATION

- Opening of putty and filler cans, bottles and machine-locked clamping rings
- Venting cans and canisters
- Screw connection (10 mm wrench)

## RUPES CLEANING AND MAINTENANCE OIL

Maintenance oil




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 150.190 | 50 ml | 1 | 5 |

### DESCRIPTION

- Transparent maintenance oilSilicon-free

### AREA OF APPLICATION

- Maintains and lubricates pneumatic grinding and polishing machines

### BENEFITS

- Also applicable at low temperatures
- Corrosion and wear protection

For industrial and professional use only.



## COLOUR MATCH LAMP

Day light lamp




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 155.614 | Colour Match Lamp | 1 | 12 |

### DESCRIPTION

- Power: 5 Watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 hours
- Running time: 2.5 hours
- Light intensity:
- 1.Mode = 2,700K – 500 lumen CRI >96+
- 2.Mode = 4,500K – 500 lumen CRI >96+
- 3.Mode = 6,500K – 500 lumen CRI >96+
- Working temperature: -10 °C to +40 °C
- Weight: 310 g
- Dimensions: 190 × 56 × 29 mm
- Certification: IP65 | IK07

### AREA OF APPLICATION

- LED Colour matching lamp

### BENEFITS

- Battery powered LED lamp for flexible use
- Adjustable magnetic stand for work on vertical application areas
- Choice between three different colour temperatures
- Extremely robust and resistant

## UV SMART LAMP

UV hand lamp




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.777 | 190 × 56 × 29 mm | 1 | 12 |

### DESCRIPTION

- Power: 5 Watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 hours
- Running time: 4.5 hours
- Working temperature: -10 °C to +40 °C
- Weight: 310 g
- Dimensions: 190 × 56 × 29 mm
- Certification: IP65 | IK07

### AREA OF APPLICATION

- UV hand lamp for curing UV products for spot repair on a surface with a maximum diameter of 10 cm

### BENEFITS

- Battery operated UV hand lamp for flexible use
- Adjustable magnetic stand for working on vertical application areas
- Hook for space-saving storage

### APPLICATION ADVICE

Always protect your eyes when using UV lamps. Wear Carsystem UV safety glasses.

For industrial and professional use only.

## BLOW OFF GUN

Blow off gun



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 145.270 | Blow Off Gun with sound absorption and nipple (EU) | 1 | 5 |
| 145.271 | Blow Off Gun with sound absorption and nipple (CH, NL) | 1 | 5 |
| 145.272 | Blow Off Gun with metal nozzle and nipple (EU) | 1 | 5 |
| 145.273 | Blow Off Gun with metal nozzle and nipple (CH, NL) | 1 | 5 |

### DESCRIPTION

- Ergonomic handle
- Maximum inlet pressure: 10 bar
- Temperature resistance: -15 °C to +70 °C

### AREA OF APPLICATION

- For blowing off residual dust from all surfaces

### BENEFITS

- Blow off gun with metal tip for precise cleaning of surfaces and cavities
- Blow off gun with noise reduction to ~ 77 db with a scratch preventing plastic nozzle

## BLOW OFF STICK

Blow off stick



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.123 | Blow Off Pen Orion (EU) | 1 | 150 |
| 154.124 | Blow Off Pen ARO (CH, NL) | 1 | 150 |

### DESCRIPTION

- Noise reduction
- Chemical resistant
- Air consumption: 450 l / min. at 10 bar
- Temperature resistance: -40 °C to +150 °C

### AREA OF APPLICATION

- For blowing off residual dust from all surfaces

### BENEFITS

- Rubber tip prevents from scratching the surface

## MAGNETIC FLAT STRIP

Flat strip

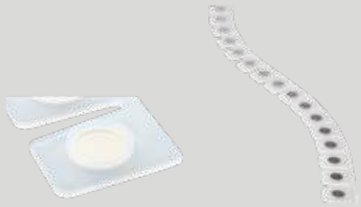

| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 137.214 | 4 × 55 cm | 1 | 5 |

### DESCRIPTION

- Flexible plastic strip

### AREA OF APPLICATION

- Flat and magnetic adhesive plastic strip for sealing the masking film onto the car

## MAGNETIC SANDING PROTECTION

Edge protection



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 130.992 | 4 × 55 cm | 1 | 5 |

### DESCRIPTION

- Flexible plastic edge protection

### AREA OF APPLICATION

- Magnetic edge protection avoids unwanted sanding on surrounding parts



## MAGNETIC GUN HOLDER PLUS

Paint gun holder



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 159.969 | Black rubberised holder | 1 | 24 |

### DESCRIPTION

- Magnetic paint gun holder

### AREA OF APPLICATION

- Holder for paint guns
- Can be fixed on ferromagnetic surfaces

## MAGNET FOR LED LAMPS

Magnet



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 154.648 | Magnet for LED lamps | 1 | 60 |

### DESCRIPTION

- Magnet for flexible fixing of LED Lamps

## AIR HOSE

Air hose coil



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.131 | 9 × 16 mm / 50 m length | 50 | 50 |

### DESCRIPTION

- Antistatic rubber air hose
  Size: 9 × 16 mm
- Lentgh: 50 m
- Max. air pressure: 12 bar
- Inner tube: Smooth EPDM black
- Outer tube: Smooth EPDM blue

### AREA OF APPLICATION

- Air supply for spray guns and air driven tools

## AIR HOSE

Air hose complete



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.039 | 9 × 16 mm / 12.5 m length | 1 | 1 |

### DESCRIPTION

- Antistatic rubber air hose incl. nipple and safety coupling
- Size: 9 × 16 mm
- Lentgh: 12.5 m
- Max. air pressure: 12 bar
- Inner tube: Smooth EPDM black
- Outer tube: Smooth EPDM blue

### AREA OF APPLICATION

- Air supply for spray guns and air driven tools

## SAFETY COUPLING

Safety coupling with quick connector



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 143.127 | Ø 9 mm | 1 | 1 |

### DESCRIPTION

- Air savety coupling for quick connectors

## MS COUPLING

MS Coupling



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.036 | Ø 9 mm | 1 | 1 |

### DESCRIPTION

- MS Coupling

## NIPPEL

Nipple with inner thread



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.034 | 1/4 " | 1 | 10 |

### DESCRIPTION

- Air supply nipple with inner tread

## NIPPEL

Nipple with outer thread



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.033 | 1/4 " | 1 | 10 |

### DESCRIPTION

- Air supply nipple with conic, outer thread
- Teflon coated

For industrial and professional use only.

## WORKSHOP SEAT

Workshop seat




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.427 | Professional workshop seat | 1 | 1 |

### DESCRIPTION

- Hydraulic height adjustment
- The seat is resistant against chemicals and solvents
- Smooth seat cushion for easy cleaning
- Five rubber-protected wheels on ball bearings
- Max. load: 150 kg

### AREA OF APPLICATION

- Comfortable workshop seat in Carsystem design for all sanding and polishing works

### BENEFITS

- Magnetic storage platform for tools and working materials




## WORKSHOP BUCKET

10 l




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 139.442 | Workshop bucket / 10 l | 1 | 1 |

### DESCRIPTION

- Capacity: 10 l

### AREA OF APPLICATION

- Universal workshop bucket

## PAINT ARRESTOR

Paint mist separator



| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 142.891 | 500 mm × 20 m 3" | 1 | 1 |
| 142.894 | 500 mm × 91 m 3" | 1 | 1 |
| 142.898 | 660 mm × 20 m 3" | 1 | 1 |
| 142.901 | 760 mm × 20 m 3" | 1 | 1 |
| 142.902 | 760 mm × 25 m 3" | 1 | 1 |
| 142.903 | 760 mm × 91 m 3" | 1 | 1 |
| 142.906 | 860 mm × 91 m 3" | 1 | 1 |
| 142.910 | 1000 mm × 20 m 3" | 1 | 1 |
| 142.911 | 1000 mm × 25 m 3" | 1 | 1 |
| 142.912 | 1000 mm × 50 m 3" | 1 | 1 |
| 142.913 | 1000 mm × 91 m 3" | 1 | 1 |
| 142.917 | 1250 mm × 91 m 3" | 1 | 1 |
| 142.919 | 1530 mm × 25 m 3" | 1 | 1 |

### DESCRIPTION

- Paint mist separator
- Glass fibre basis with elastic fibre structure
- Temperature resistant up to 100°C

### AREA OF APPLICATION

- Paint filter for paint booths
- Separation of paint mist

## BOOTH MASK WHITE

Booth protection mask




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 153.205 | 19 L | 1 | 1 |

### DESCRIPTION

- Booth protection mask
- Colour: White
- Water-based
- Forms a highly opaque, shiny film

### AREA OF APPLICATION

- Protects the spray booth walls against overspray
- Perfectly suitable for paint booths which cannot be cleaned with water

### BENEFITS

- Covers all existing paint residues
- Provides perfect light conditions
- Forms a high layer thickness
- Easy to remove

### APPLICATION ADVICE

We recommend a nozzle size of 2.2 – 2.5 mm.



## BOOTH MASK STICK

Booth protection mask




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.338 | 5 L | 1 | 4 |
| 149.339 | 20 L | 1 | 1 |
| 149.340 | 25 L | 1 | 1 |

### DESCRIPTION

- Booth protection mask
- Colour: Transparent
- Water-based
- Provides a clear, tacky protection film

### AREA OF APPLICATION

- Protects booth walls and lightings against overspray
- Perfectly suitable for booth walls
- Absorbs the overspray

### BENEFITS

- Biodegradable
- Dust and lints stick on the tacky film
- Water soluble

### APPLICATION ADVICE

We recommend a nozzle size of 1.8 – 2.2 mm.

## BOOTH MASK

Booth protection mask




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 149.358 | 5 L | 1 | 4 |
| 149.359 | 20 L | 1 | 1 |

### DESCRIPTION

- Booth protection mask
- Colour: Transparent
- Water-based
- Provides a transparent-clear, tack free protection film

### AREA OF APPLICATION

- Protects booth walls and lightings against overspray
- Perfectly suitable for lightings and paint booths which cannot be cleaned with water

### BENEFITS

- Biodegradable
- Clear-transparent
- Does not influence the light conditions
- Protects for 3 month or 150 paint cycles
- Forms a tack free film, which can be peeled off

### APPLICATION ADVICE

We recommend a nozzle size of 1.8 – 2.2 mm.

For industrial and professional use only.

## RUPES VACUUM CLEANER S145

Vacuum cleaner




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.343 | S145L Profi Vacuum Cleaner | 1 | 1 |
| 157.344 | S145PL Profi Vacuum Cleaner | 1 | 1 |
| 157.471 | S145EM Vacuum cleaner | 1 | 1 |
| 157.472 | S145EPM Vacuum cleaner | 1 | 1 |
| 157.560 | Dust bag S Serie pack of 5 | 1 | 1 |

### DESCRIPTION

- Movable vacuum cleaner with 5 m hose
- Tank volume: 45 L
- Air flow: 3,400 L/min.
- Noise level: 67 dB (A)
- Power: 1,200 W
- Max. Power: 2,400 W




For industrial and professional use only.

## RUPES CARRIER

Carrier for polishes and abrasives




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.342 | Carrier | 1 | 1 |

### DESCRIPTION

- Workshop carrier for polishes and abrasives
- 3 Systainer with drawers
- Storage compartment with additional suspension for polishing machines
- Power connection for electric tools
- Impact and shock resistant plastic

## RUPES WORKSHOP CARRIER KC28

Workshop carrier




| Art.-No. | Specification | SP | MOQ |
|---|---|---|---|
| 157.341 | KC28 | 1 | 1 |
| 157.469 | Peg board 016.1110/c for KC28 | 1 | 1 |

### DESCRIPTION

- Workshop carrier for vacuum cleaners
- 2 Tool holder
- 2 Holders for suction hoses
- 2 Rotating front castors with brakes
- Storage compartment, lockable with key
- Working surface with large multipurpose box
- Ergonomic handle

For industrial and professional use only.

# INTERNATIONAL

## AMERICA

Barbados
Canada
USA

## EUROPE

**CARSYSTEM Headquarters**
**Germany**
Albania
Austria
Belarus
Belgium
Bosnia-Herzegovina
Bulgaria
Croatia
Czech Republic
Denmark
Estonia
Finland
France
Greece
Hungary
Iceland
Ireland
Italy
Kosovo
Luxemburg
Macedonia
Montenegro
Netherlands
North Macedonia
Norway
Poland
Portugal
Romania
Russia
Serbia
Slovakia
Slovenia
Spain
Sweden
Switzerland
Turkey
United Kingdom



## SOUTH AMERICA

Chile
Colombia
Costa Rica

## AFRICA

Senegal
South Africa

## MIDDLE EAST

Bahrain
Irak
Israel
Kuwait
Qatar
United Arab Emirates

## ASIA

Armenia
China
Hong Kong
India
Japan
Kazakhstan
Singapore
South Korea
Taiwan
Thailand

## AUSTRALIA

Australia
New Zealand

# QUICKFINDER



## 1


| | |
|---|---|
| 1K Easy Filler | 119 |
| 1K Easy Primer | 118 |
| 1K Epoxy Primer | 118 |
| 1K NC Filler | 76 |


## 2


| | |
|---|---|
| 2K Carbo Clear Plus | 98 |
| 2K Clear VOC 420 | 100 |
| 2K Clear VOC CC.19 AS | 101 |
| 2K Clear VOC HS-SR | 101 |
| 2K Clear VOC Matt | 102 |
| 2K Clear VOC Premium | 100 |
| 2K Clear VOC Speed Plus | 98 |
| 2K Epoxy Fill Primer | 115 |
| 2K Filler Air Plus | 106 |
| 2K Filler Vario Plus | 107 |
| 2K Filler Wet on Wet Plus | 107 |
| 2K High-Speed Klarlack | 110 |
| 2K VOC Filler 540 | 106 |


## 3


| | |
|---|---|
| 30 Years Ltd. Coverall Jacket | 184 |


## A


| | |
|---|---|
| Acryl Thinner | 103 |
| Activator | 102 |
| AF.21 1K Filler | 105 |
| AF.21 X-pert | 105 |
| Air hose | 205 |
| All In One Covers | 95 |
| Alu Spezial | 66 |
| Aluminium mesh | 79 |
| Anti Rust Putty | 68 |
| Applicator | 154 |
| Auto Mask | 92 |


## B


| | |
|---|---|
| Black Tape | 88 |
| Blacky | 80 |
| Blow Off Gun | 204 |
| Blow Off Stick | 204 |
| Booth Mask | 209 |
| Booth Mask Stick | 209 |
| Booth Mask White | 208 |
| BPO Hardener | 75 |
| Brush Set | 129 |
| Bumper Paint | 122 |
| Bumper Paint Spray | 120 |
| Bumper Stand | 199 |
| Bumper Structurant Spray | 120 |


## C


| | |
|---|---|
| C-Wax C-80 | 134 |
| Can Scraper | 126 |
| Car Clean Double Blue | 176 |
| Car Clean Double White | 177 |
| Car Clean Multi | 176 |
| Car Clean Multi Extreme Box | 176 |
| Car Clean Triple Blue | 176 |
| Car Clean Trolley | 202 |
| Car Mop White | 140 |
| Car Polish Roll | 144 |
| Carbo Putty | 72 |
| Carbo Spray | 72 |
| Carbo Spray Thinner | 73 |
| CC.20 X-pert | 99 |
| CC.21 X-press FIVE | 99 |
| Classic Coverall Jacket Anthracite | 184 |
| Classic Coverall Pants | 185 |
| Classicline Soft Pad | 26 |
| Cleaning wipes | 177 |
| Clear Coat Spray | 111 |
| Cockpit-Spray | 175 |
| Coding Caps | 174 |
| Color Match Card Paper | 128 |
| Colour Match Lamp | 203 |
| Control-Spray | 48 |
| Coverall Black Suit | 186 |


## D


| | |
|---|---|
| Dispenser bottle incl. Cap | 135 |
| Dispenser for paint strainers | 125 |
| Dispenser Multi-Mix | 125 |
| Disposable protective coverall | 187 |
| Double Sanding Soft Pad | 26 |
| Dry Coat 2.0 – Starter Set | 46 |
| Dualmatic | 83 |
| Dust Needle | 129 |


## E


| | |
|---|---|
| Easy Clean Box | 81 |
| Easy Mask | 92 |
| EF.21 EP-Filler | 104 |
| Elastic beige | 67 |
| Elastic white | 67 |
| Etch Primer | 116 |
| Excenter Back Pad Multi M | 33 |
| Excenter Back Pad T.19 | 32 |
| Excenter Classic | 50 |
| Explorer Ltd. 2-Piece Coverall | 185 |


## F


| | |
|---|---|
| Faser | 70 |
| Fill putty | 78 |
| Fine Block | 44 |
| Fine Line Tape Blue | 87 |
| Fine putty | 78 |
| Finish Back Pad | 145 |
| Finish Back Pad M-14 | 145 |
| Finish Clay | 180 |
| Finish Control Foam C-99 | 141 |
| Finish Foam Black AH | 137 |
| Finish Foam Orange | 137 |
| Finish Foam White AH | 137 |
| Finish Quadra Pad C-10 | 136 |
| Finish Sander Back Pad | 33 |
| Finish Sander RC 9332 | 51 |
| Finish Sandwich Pad C-30 | 136 |
| Finish Waffle Foam Black AH | 139 |
| Finish Waffle Pad Orange | 140 |
| Flex | 71 |
| Flow | 58 |
| Foam Tape | 93 |
| Foam Tape T-Soft | 93 |


## G


| | |
|---|---|
| Glas | 69 |
| Glas White | 69 |
| Glass fibre mat | 79 |
| Glass fibre reinforced putty | 77 |
| Grip To Stick Interface Pad | 38 |
| Gun Clean Set | 181 |


## H


| | |
|---|---|
| Hand Cleaner | 194 |
| Hand Cleaner extreme | 194 |
| High Gloss Additive | 103 |
| HpP Primer | 108 |
| HS-Acryl Tape | 162 |
| $H_2O$ Cleaner | 173 |


## I


| | |
|---|---|
| Interface Pad | 35 |
| ISO-VE 7030 | 173 |


## J


| | |
|---|---|
| Japanese Putty Knife | 79 |


## K


| | |
|---|---|
| KS-100 | 155 |
| KS-1000 | 160 |
| KS-1050 | 160 |
| KS-200 | 156 |
| KS-250 | 156 |
| KS-300 | 157 |
| KS-3000 Plus | 161 |
| KS-400 | 157 |
| KS-4000 | 161 |
| KS-50 | 155 |
| KS-500 | 158 |
| KS-550 | 158 |
| KS-800 | 159 |
| KS-850 | 159 |
| KS-Brush | 166 |
| KS-Dual Gun | 169 |
| KS-Gun | 168 |


## L


| | |
|---|---|
| Lamb Wool Pad Gold S | 138 |
| Lamb Wool Pad White S Edge | 138 |
| Latex Hand I Premium | 191 |
| Liquid Masking | 95 |
| Liquid Putty | 68 |


## M


| | |
|---|---|
| Magnet for LED Lamps | 205 |
| Magnetic Flat Strip | 204 |
| Magnetic Gun Holder Plus | 205 |
| Magnetic Sanding Protection | 204 |
| Masking film blue | 91 |
| Masking film green | 91 |
| Masking film yellow | 90 |
| Masking Paper Master | |
| Masking Paper Master II | 89 |
| Masking Paper Top II | 89 |
| Master Tape Green | 86 |
| Master Tape II | 86 |
| Metallic | 65 |
| Micro Fiber Cloth | 142/143/144 |
| Micro Tip | 129 |
| Mini Back Pad | 34 |
| Mini Sanding Machine RC 9330 | 148 |
| Mixing Stick Black | 129 |
| MMIR Knife Premium | 92 |
| MMIR Trolley | 201 |
| MMIR Trolley "Box" | 201 |
| MMIR-Mask Aqua Tec | 90 |
| MMIR-Mask Light Green | 90 |
| Mount Tape | 162 |
| MS Air Gun | 168 |
| MS Coupling | 206 |
| Multi | 62 |
| Multi Black Rapid | 57 |
| Multi Green | 59 |
| Multi Green Changer | 60 |
| Multi Green Glas | 61 |
| Multi Green Glas Light | 61 |
| Multi Green Plus 1.0 Super Light | 58 |
| Multi Green Rapid | 59 |
| Multi Green SF | 60 |
| Multi Light | 62 |
| Multi Mix Cup 2.0 | 124 |
| Multi Plus | 63 |
| Multi Silver Light | 63 |

Multi Soft 64
Multi Stand 199
Multi Strain 125
Multi Super Flex 70
Multi-Mix Bucket 127
Multi-Mix Lids 125


# N


Nano Carnauba Wax 135
Nano Easy Cleaner 180
Neopren Hand 192
Nippel 206
Nitril Hand Premium black 191


# O


Opener for putty and filler cans 202
Orbital Sander CSH-CMS01 kit 147


# P


Pad Saver 37
Paint Arrestor 207
Paint Overall Blue 186
Paint Planer 45
Paint Strainer 126
Paint System CPS 2.0 123
Paint Trolley 200
Paint Trolley Flexi Plus 198
Paper Trolley 198/200/201
Paper Trolley 1500 201
PDC Easy Paint 94
PG - FG Fine Filter 127
Plastic Can Empty 127
Plastic Primer 119
Plastic Pro 71
Plastic spreader 81
Polish C-05 cut 132
Polish C-07 cut 132
Polish C-10 strong 133
Polish C-30 finish 133
Polish Foam Green 136
Polish Foam White SC 137
Polish Foam Yellow 136
Polish Waffle Foam Yellow 140
Polishing Back Pad 145
Polishing Machine RC 166 148
Polyester Repair Resin 77
Polyester Repair Set 76
Power Mix 2.0 164
Power Mix Film 2.0 165
Power Mix Gun 165
Power Mix Primer 164
Power Mixer 165
Prefill-Spray 121
Prefill-Spray Water 121
Prep & Scuff 49
Prep Hand II 193
Prep Hand III 193
Prep-Brush 49
Primer Spray 116
Primer Surfacing Spray 115
ProFlex Back Pad PSA 34
ProFlex Callisto 18/19/20
ProFlex Hydra 17
ProFlex Interface Pad 37
ProFlex Interface Pad Finish 36/37
ProFlex Jupiter 14/16
ProFlex Jupiter Soft 15
ProFlex Jupiter Soft $H_2O$ 15/16
ProFlex Mercury 28
ProFlex Mercury Sanding Block 44
ProFlex Neptune 27
ProFlex Neptune Pad MaxGrip 38
ProFlex Neptune Soft 28
ProFlex Pluto 29
ProFlex Pluto Sanding Block 43
ProFlex Styx 29
Protective Film SPF 92
Pump for Hand Cleaner 3 l 195
Pump Sprayer 174
Putty dispenser 83
Putty Knife 79
Putty Mix Board 81


# R


Rallye-Spray gloss 113
Rallye-Spray matt 113
Rallye-Spray Premium 112
Refinish 1 134
Refinish Restorer 141
Replacement Spray Head 122
Respirator Mask FFP2 with valve 189
Respirator Mask FFP3 with valve 189
Rotary Polisher CSH-CRP01 Kit 146
Rubber Spreader Set 80
RUPES Angle Polishing Machine LH76P 149
RUPES Back Pad 32
RUPES Carrier 211
RUPES Cleaning and maintenance oil 202
RUPES Ibrid Nano 52
RUPES Ibrid Nano Q-MAQ 52
RUPES Mini Polishing Machine HLR75STB 149
RUPES Orbital Sander RE21ALN 51
RUPES Orbital Sander SL42AES 50
RUPES Orbital Sander SLP41A 51
RUPES Polish Pad 139
RUPES Polishing Machine LH19E 148
RUPES Polishing Machine LHR15 148
RUPES Random Orbital Single-Hand Sander RA75 51
RUPES Skorpio E RX 50
RUPES Skorpio III RH 50
RUPES Vacuum Cleaner S145 210
RUPES Workshop Carrier KC28 211


# S


Safety Coupling 206
Safety Lens 190
Sanding Block 198 2.0 40
Sanding Block 198 Kit 41
Sanding Block 300 40
Sanding Block 400 2.0 39
Sanding Block 400 Grip Flex 39
Sanding Block Disc Kit 150 41
Sanding Block Grip 42
Sanding Block Grip Box 42
Sanding Block Hard 43
Sanding Disc F.19 11/12
Sanding Disc F.19 Finish 12/13
Sanding Disc F.19 Soft 11
Sanding Disc F.23 Ceramic 10
Sanding Disc P.19 13
Sanding Fleece V.19 22/23
Sanding Strips F.23 Ceramic 21
Sanding Water SW20 31
Scraper 181
Silicone Remover Mild 172
Silicone Remover Water 172
Silver Tape 88
Silver Wheel 114
Slim Tape 86
Slim Tape Green 87
Soft 64
Soft Interface Pad 35
Soft-Roll 25
Sound Deadening Panels 163
Speedmixer 10 kg 82
Speedmixer 3 kg 82
Spotblender 104
Spotblender Spray 111
Spray 74
Spray Filler Spray 117
Spray Head 122
Spray Out Cards Metal 128
Spray Plus 74
Spray Thinner 75
Spraygun cleaner 175
Squeezer 180
Star Dust P2 188
Star Mask 187
Star Mask Disc 188
Star Mask Pre P2 R 188
Star Mask Refill 188
Staub Stop 179
Staub Stop Super Wave 179
Staub Stop Water 178
Staub Stop Water Black 178
Steel 66
Steel Bond 163
Stripping Disc 30
Super Nitril Hand l 192


# T


Tape Off Disc Premium 31
Tape Off Tool 53
Tec Line Matt Matting Mousse 48
Tec Line Mattflex Pad 24
Tec Line Mattflex Premium 23
Tec Line N20 21
Tec Line Pro Finish 20
Tec Line Softflex 24
Tec Line Stick 95
Thermo-Spray 114
Tinting paste filler 108
Top Tape 86
Topline Soft Pad 27
Topline WP S 30
Touch Up 128


# U


UNIFLEX Adapter Nozzle 166
UNIFLEX Air Gun 167
UNIFLEX Glas 153
UNIFLEX Glas Fast-Primer 154
UNIFLEX Glas HM 153
UNIFLEX Gun 167
UNIFLEX MS 152
UNIFLEX Nozzle 166
UNIFLEX PU 152
UV Clear 109
UV Filler Spray 109
UV Glasses 190
UV Smart Lamp 203


# W


Wall dispenser for Soft Bottle 2 l 195
Wax Puck 140
Wheel Cover 95
WM Tape 89
Workshop Bucket 207
Workshop Seat 207
WR-Lifting Tape 88
WR-Lifting Tape Premium 88


# X


X-Stand Classic 200
X-Stand Top 200


# Z


Zinc Spray 117

The information is intended as a guide to application and is based on current information. The information is offered in good faith and without guarantee or liability. Product specifications subject to change availability.
© VOSSCHEMIE 2025 / 20.1 Edition

CAR SYSTEM®

**CARSYSTEM HEADQUARTERS VOSSCHEMIE GmbH**
Esinger Steinweg 50 | 25436 Uetersen / Germany

Tel.: +49 (0) 41 22 / 717-0 | Fax: +49 (0) 41 22 / 717-193
E-Mail: info@vosschemie.de

For more information visit us on:
**www.carsystem.org**

Art.-Nr. 139.759